

DATA SHEET


Zanoli Synthesis 05/40E-3 Triple Deck 16 Inch Electric Impingement Conveyor Oven

2SV4206B-3



Build

- Built entirely in stainless steel
- Easy access for thorough cleaning and hygiene
- In built cooling system for all external parts ensures oven is cool to touch and work with.
- Heavy duty construction with reliable and durable components.
- Stackable up to 3 units.
- Optional Heavy duty stand

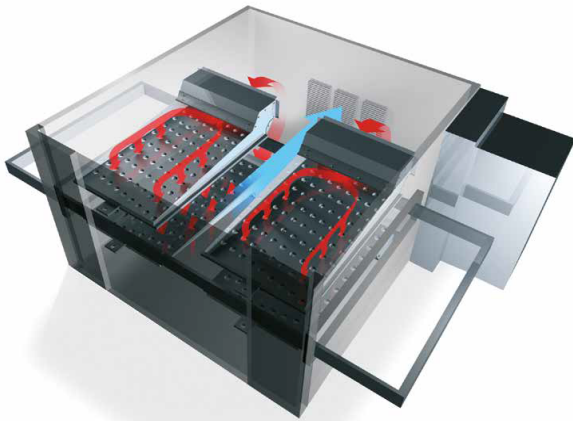


Impingement technology

- Maximum silence of the mesh conveyor system and ventilation motors.
- Latest advancements in air impingement technology allow for rapid heating & cooking of all foods consistently at all times.
- The piercing jets of hot turbulent air encompass every part of the oven delivering exceptional results every time.

Controls

- BRP (power regulation) system reaches working temperature in 20 minutes
- Balanced temperature detection system managed via dual oven probes.
- Maximum cooking temperature up to 320 °C

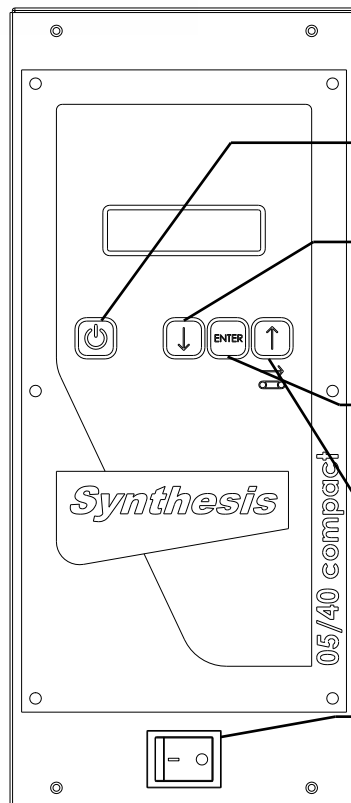

Standby key



Cooking set-point display and parameter value step down key



Parameter modification access key



Conveyer arrest and parameter value step up key



switch ON/OFF

DATA SHEET

Zanoli Synthesis 05/40E-3 Triple Deck 16 Inch Electric Impingement Conveyor Oven

2SV4206B-3



Technical specifications

External Size

External Width	1270mm
External Depth	800mm
External Height	1170mm

Cooking Chamber size

Internal Width	570mm
Internal Depth	400mm
Internal Height	90mm

Conveyor Belt Size

Conveyor Width	1070mm
Conveyor Depth	400mm

Weight

Net weight	77 kg x 3
package weight	*

Connection requirements electric

Total electrical power	6.3kW x 3
------------------------	-----------

Electrical Supply Current (per oven)

Voltage	415V or 240V upon request
Current at 380-415 V 3N~	13 A

Cable and Lead

Plug Supplied	No
Cable Length	2m
Wire section	4/10 mm ²
Electrical connection	Plugless 5 lead cable

Recommended Clearance

Minimum clearance	Left	Rear	Right
Standard	200mm	200mm	200mm

Operating Environment

Temperature	0 - 40 °c
Maximum humidity	95% without condensation
Noise	< 70 decibels

Operation

Conveyor Belt speed	2 - 30 min / Halt
Maximum Temperature	320°c

Warranty

2 Year Warranty	2 years parts and labour
-----------------	--------------------------

**Subject to a preventative maintenance plan*

We reserve the right to alter specifications without notice.

DATA SHEET

Zanoli Synthesis 05/40E-3 Triple Deck 16 Inch Electric Impingement Conveyor Oven

2SV4206B-3





Options

<input type="checkbox"/>	Micromesh belt - 6mm
SKU	--

<input type="checkbox"/>	Right to left Belt configuration
SKU	--

<input type="checkbox"/>	High speed conveyor belt gearbox
SKU	--

<input type="checkbox"/>	Stand suited for triple deck configuration
SKU	OSV2A18
Size	690 x 530 x 445
Weight	16kg









We reserve the right to alter specifications without notice.

DATA SHEET

Zanoli Synthesis 05/40E-3 Triple Deck 16 Inch Electric Impingement Conveyor Oven

2SV4206B-3

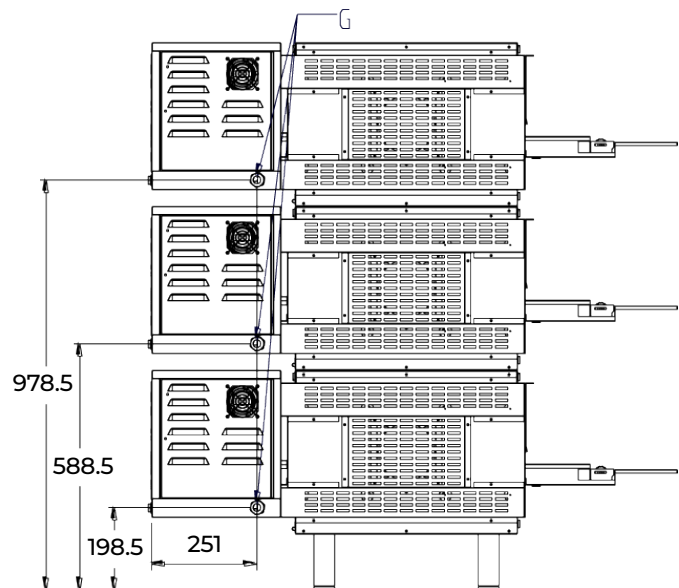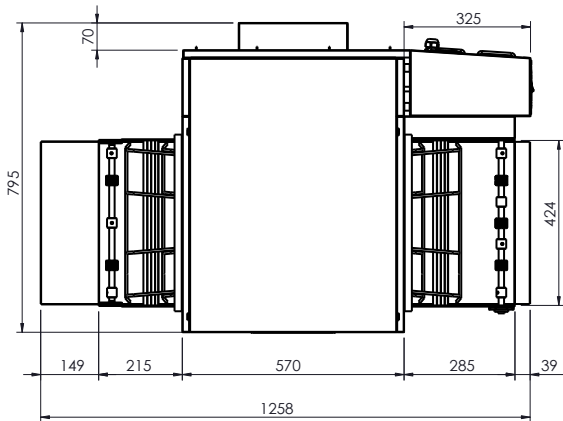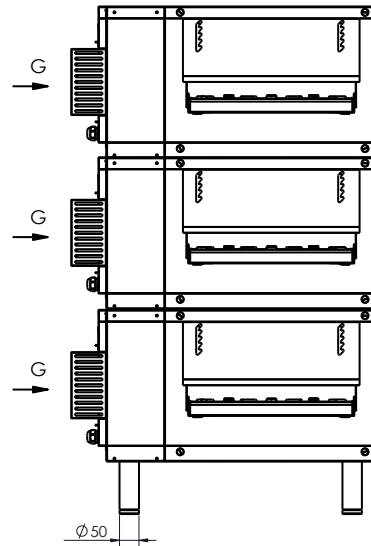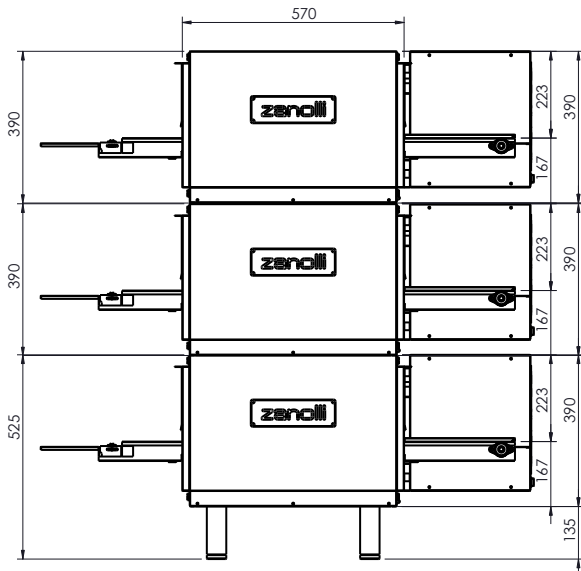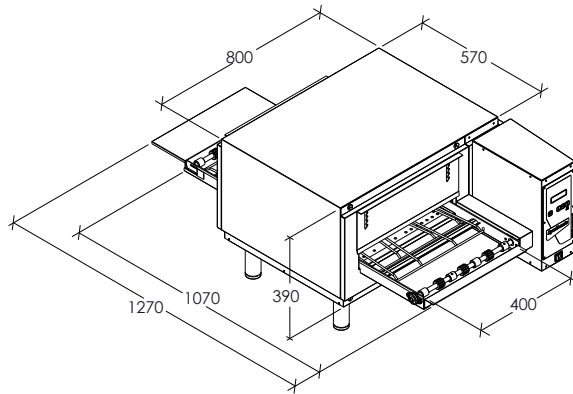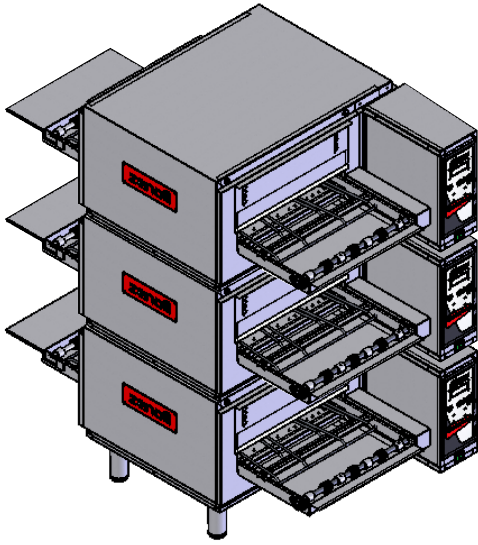

G Entry point for power supply

We reserve the right to alter specifications without notice.



1800 183 818

support@thegoodlady.com.au

www.thegoodlady.com.au