

H-x-G010 - Sediment Filter

H-x-G010W Series

Sediment Filter

Spin-Down Design w/ Integrated Maintenance Functions

w/ 100 & 50 Mesh Stainless Steel Filters

Integrated Hose Drain Valve, Pressure Gauge

Mounting Bracket & Service Tool

Certifications

Certified to NSF/ANSI/CAN 61 & 372, NSF/ANS





14 - Applies to Body H-G0104W, Fittings

H-7-x10W




Size (in)	Item#	Weight (lbs)	CTN Qty	Case Qty	A	B	C	D		
F1807 PEX									100 PSI CWP	100°F Max
3/4"	H-1-G0103W	7.37	1	4	11.24	5.28	5.59	7.51		
1"	H-1-G0104W	7.37	1	4	11.24	5.28	5.59	7.85		
F1960 PEX									100 PSI CWP	100°F Max
3/4"	H-3-G0103W	7.41	1	4	11.24	5.28	5.59	8.15		
1"	H-3-G0104W	7.52	1	4	11.24	5.28	5.59	8.73		
FIP									100 PSI CWP	100°F Max
3/4"	H-4-G0103W	7.56	1	4	11.24	5.28	5.59	7.85		
1"	H-4-G0104W	7.67	1	4	11.24	5.28	5.59	8.15		
MIP									100 PSI CWP	100°F Max
3/4"	H-2-G0103W	7.56	1	4	11.24	5.28	5.59	8.21		
1"	H-2-G0104W	7.69	1	4	11.24	5.28	5.59	8.57		
Press									100 PSI CWP	100°F Max
3/4"	H-8-G0103W	7.50	1	4	11.24	5.28	5.59	8.33		
1"	H-8-G0104W	7.56	1	4	11.24	5.28	5.59	8.63		
Push									100 PSI CWP	100°F Max
3/4"	H-6-G0103W	7.50	1	4	11.24	5.28	5.59	8.27		
1"	H-6-G0104W	7.69	1	4	11.24	5.28	5.59	9.33		
SWT									100 PSI CWP	100°F Max
3/4"	H-5-G0103W	7.37	1	4	11.24	5.28	5.59	7.47		
1"	H-5-G0104W	7.56	1	4	11.24	5.28	5.59	8.47		



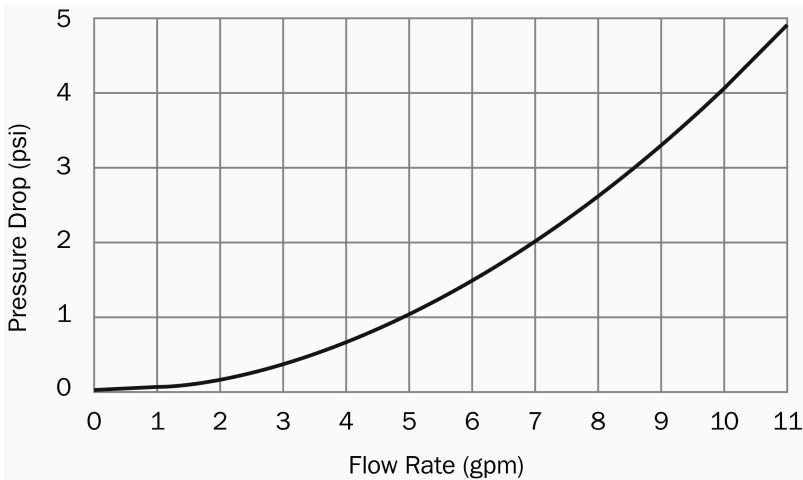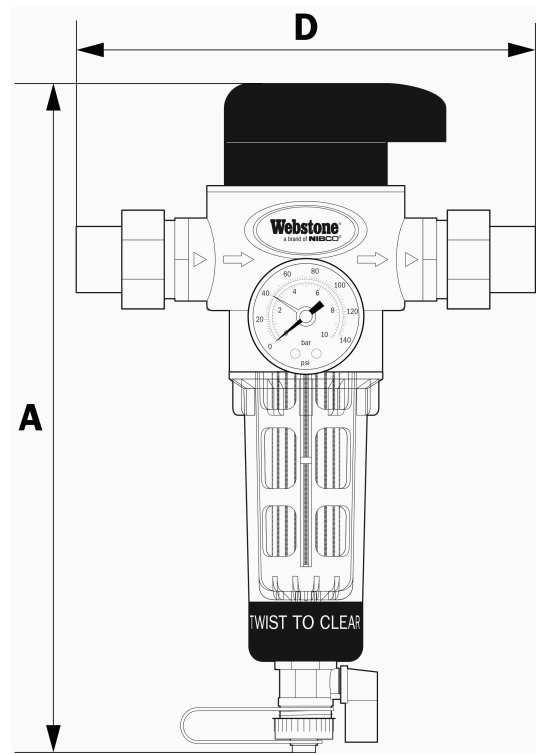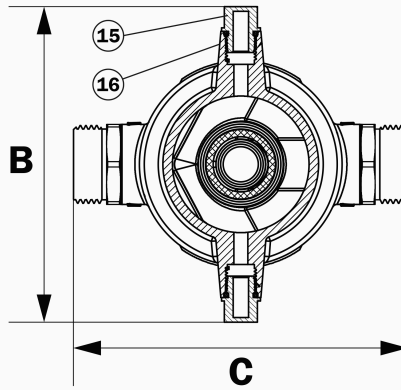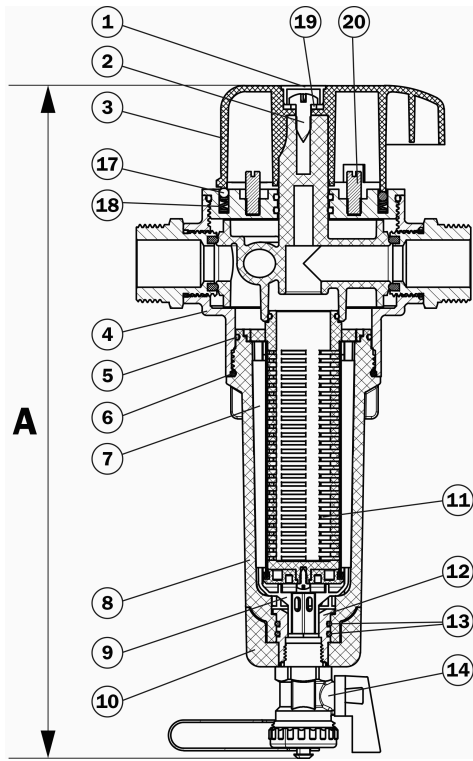


NO.	DESCRIPTION	MATERIAL
1	Cap	Plastic
2	Screw	Stainless Steel
3	Handle	Plastic
4	Body	Lead-Free DZR Brass
5	O-Ring	NBR
6	O-Ring	NBR
7	Wiper	Silicone
8	Transparent housing	Plastic
9	Shield	Plastic
10	Base	Plastic
11	Filter Mesh	Stainless Steel
12	Connector	Lead-Free DZR Brass
13	O-Ring	NBR
14	Drain Valve	Lead-Free DZR Brass
15	Plug	Lead-Free DZR Brass
16	O-Ring	NBR
17	Bead	Stainless Steel
18	Spring	Stainless Steel
19	Lock Washer	Steel
20	Location Pin	Stainless Steel
21	G-Union End(s)	See Inset

G-Union End(s)

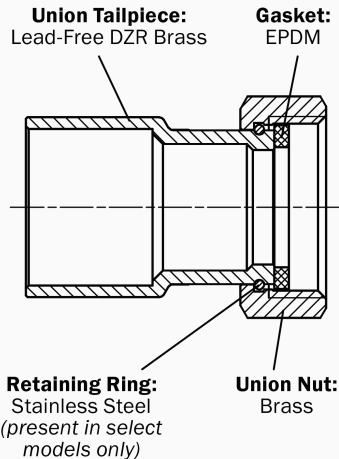

Push Connection

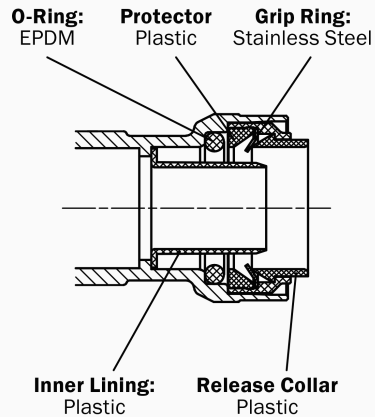

Specifications: Designed for use with water in residential or commercial plumbing systems. 15 PSI minimum system pressure; 40°F minimum operating temperature Threaded (NPT) ends comply with ANSI B1.20.1. Solder joint temperature ratings are per ASME B16.18 Annex A for 95-5 solder. Do not silver braze or overheat valves when soldering. EPDM o-rings for press ends. PEX ends are in accordance with the referenced ASTM specification; refer to tubing manufacturer for installation instructions. Push ends suitable for use with copper, CPCV or PEX tubing and feature a fully removable grip assembly.

