



# EQUILITY™ (Formerly LYNDON®)

## SINGLE LEVER AND VESSEL FAUCETS



- Cast brass spout
- Ceramic disc valve cartridge
- 3/8" compression braided, stainless steel flexible supply hose
- Lead Free—faucet contains  $\leq 0.25\%$  total lead content by weighted volume
- Maximum flow rate: 1.5 gpm (5.7 L/min)
- Low flow rate: 1.2 gpm (4.5 L/min)

### CODES AND STANDARDS

Meets or Exceeds ASME A112.18.1/ CSA B125.1, NSF 61/Section 9

EPA WaterSense™ Certified

Certified Compliant with  $\leq 0.25\%$  Weighted Average Lead Content Regulations

CEC and CALGreen® Compliant

### AVAILABLE FINISHES

Polished Chrome  
Brushed Nickel  
Matte Black

### FINISH CODE

100  
144  
243

### DESCRIPTION

1.5 gpm (5.7 L/min)  
Vessel Faucet  
1.2 gpm (4.5 L/min)   
Single Lever Faucet  
Single Lever Faucet with Grid Drain  
Vessel Faucet  
Vessel Faucet with Grid Drain

### PRODUCT NUMBER

★ D35109150.144  
D3510910C.XXX  
D35109152.XXX  
D3510915C.XXX  
D35109151.XXX

ROUGH-IN DIAGRAM  
SHOWN ON NEXT PAGE

★DISCONTINUED. Available while supplies last.



CALGreen® is a registered trademark of California Building Standards Commission.

Meets the Americans with Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.



# EQUILITY™ (Formerly LYNDON®)

## SINGLE LEVER AND VESSEL FAUCETS

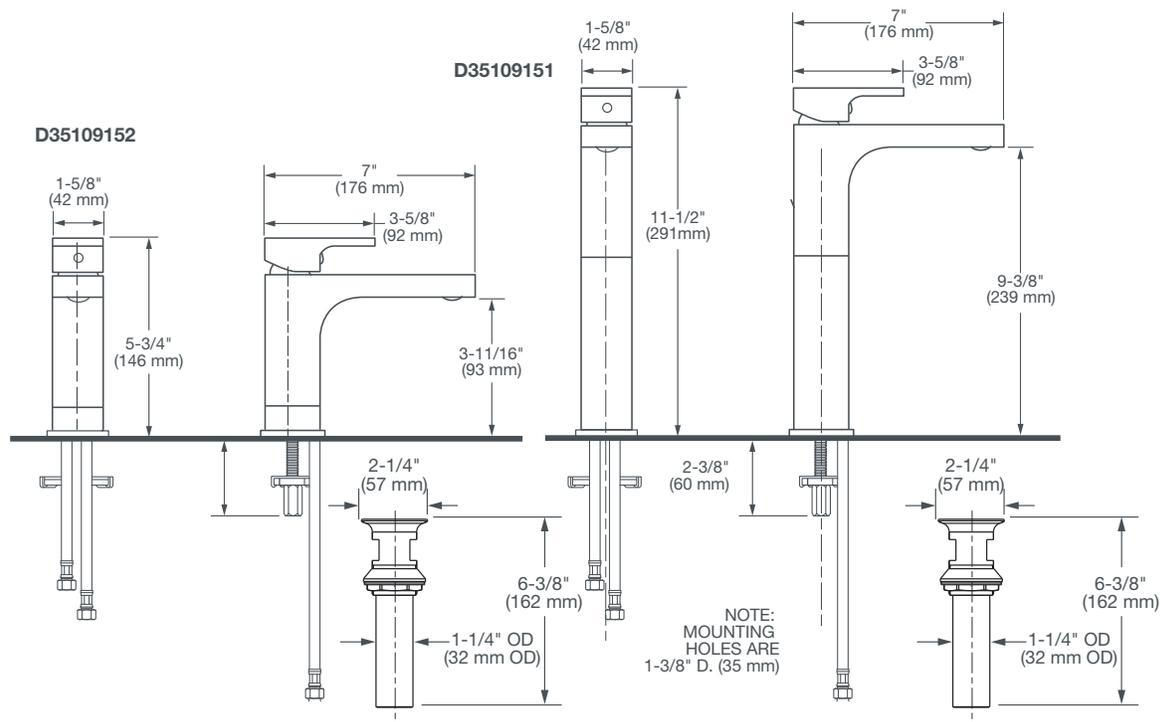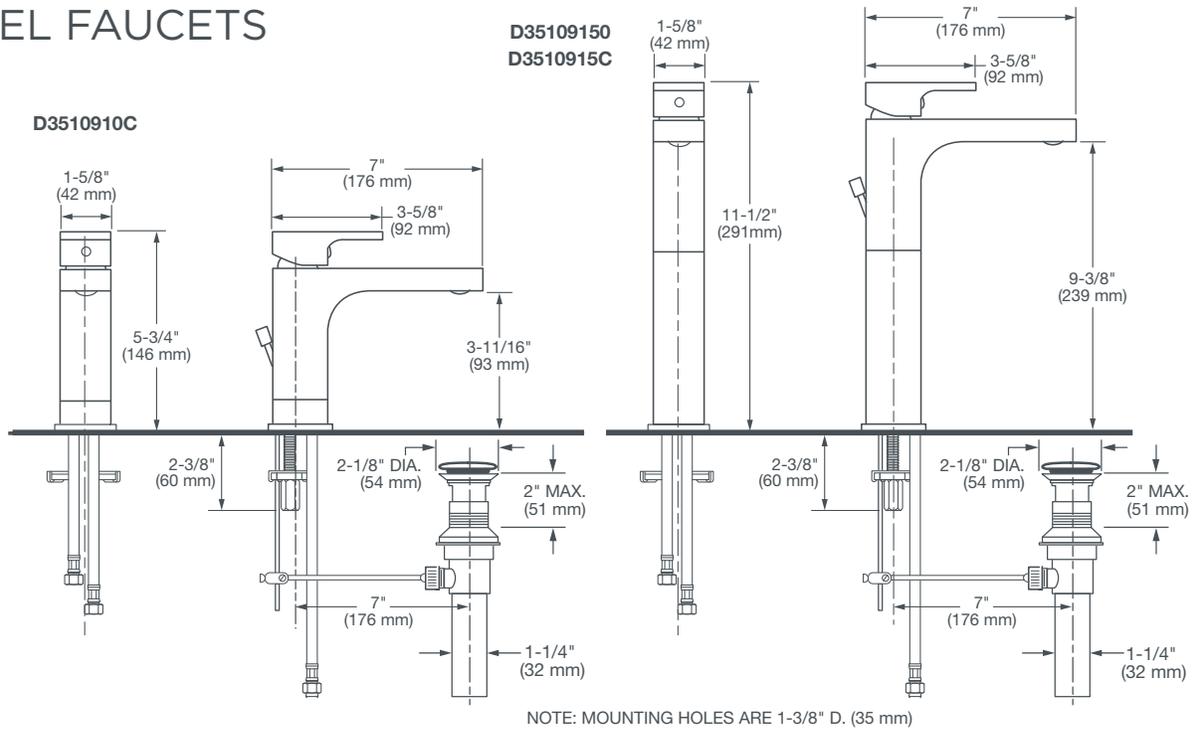

**IMPORTANT:** These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

PART OF LIXIL