

RANDALL®

SINGLE LEVER AND VESSEL FAUCETS



- Cast brass 5-3/4" spout and body
- Ceramic disc valve cartridges
- 3/8" Compression flexible hose supply connections
- Vessel faucet with 1-1/4" Speed Connect® or grid drain
- Lead Free—faucet contains $\leq 0.25\%$ total lead content by weighted volume
- Maximum flow rate: 1.5 gpm (5.7 L/min)
- Low flow rate: 1.2 gpm (4.5 L/min)

CODES AND STANDARDS

Meets or Exceeds ASME A112.18.1/ CSA B125.1, NSF 61/Section 9

EPA WaterSense® Certified

Certified Compliant with $\leq 0.25\%$ Weighted Average Lead Content Regulations

CEC and CALGreen® Compliant



AVAILABLE FINISHES

Polished Chrome
 Brushed Nickel
 Platinum Nickel
 Satin Brass (1.2 gpm only)

FINISH CODE

100
 144
 150
 427

DESCRIPTION

1.5 gpm (5.7 L/min)
 Single Lever Faucet with Grid Drain ★ D35102100.XXX
 Vessel Faucet with Grid Drain ★ D35102151.XXX
 Vessel Faucet with Speed Connect ★ D35102150.XXX
 1.2 gpm (4.5 L/min)
 Single Lever Faucet with Grid Drain D3510210C.XXX
 Vessel Faucet with Grid Drain D3510216C.XXX
 Vessel Faucet with Speed Connect D3510215C.XXX

PRODUCT NUMBER

ROUGH-IN DIAGRAM
 SHOWN ON NEXT PAGE

★DISCONTINUED. Available while supplies last.



CALGreen® is a registered trademark of California Building Standards Commission.

Meets the Americans with Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.



RANDALL®

SINGLE LEVER AND VESSEL FAUCETS

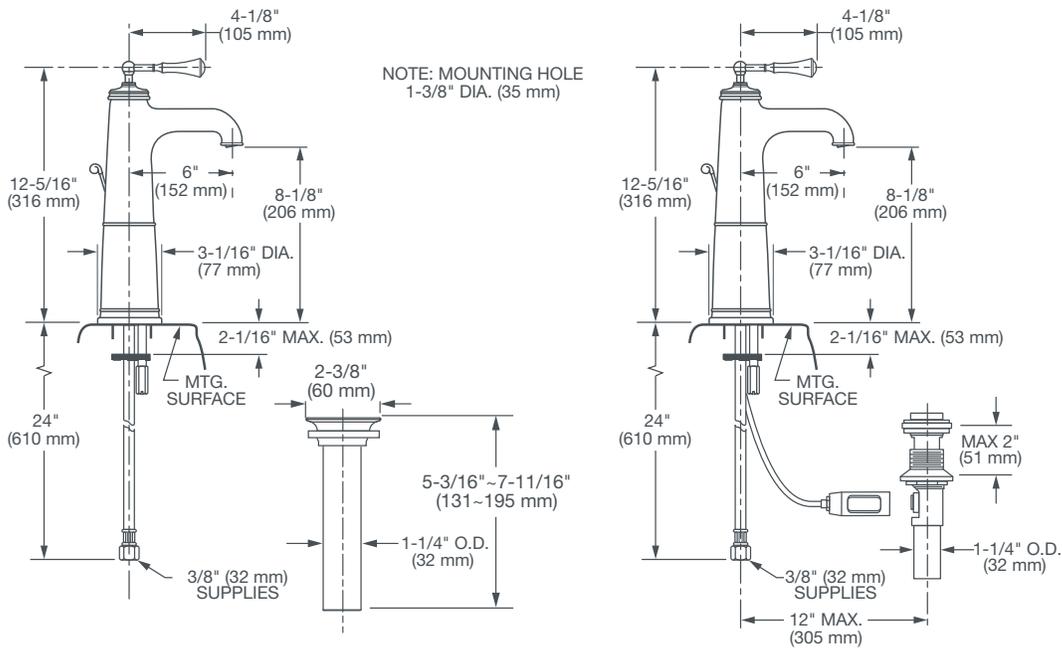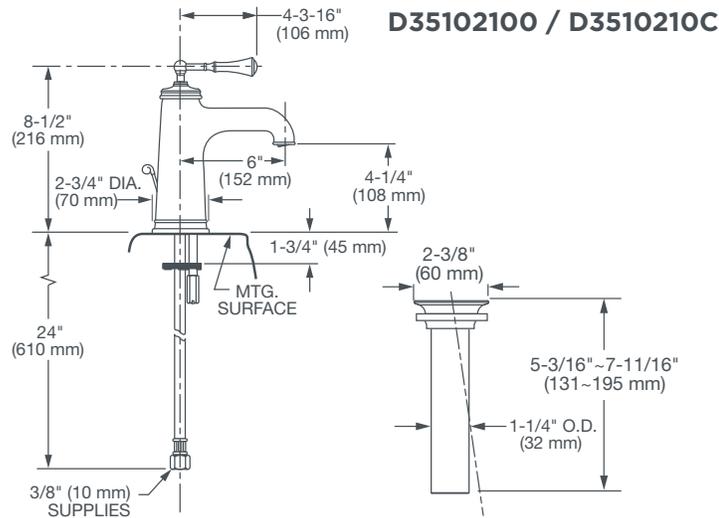

IMPORTANT: These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

PART OF **LIXIL**