

YORKVILLE[™] ELONGATED PRESSURE-ASSISTED TOILET 1.6 gpf / 6.0 Lpf **VITREOUS CHINA**

YORKVILLE[™] ELONGATED PRESSURE-ASSISTED TOILET 1.6 gpf/ 6.0 Lpf

2876.016

- Vitreous china
- Floor-mounted, back-outlet toilet
- Low-consumption (1.6 gpf/6.0 Lpf)
- EverClean[®] surface inhibits the growth of stain- and odor-causing bacteria, mold, and mildew on the surface
- Elongated bowl
- Pressure-assisted siphon jet flush action
- Fully-glazed 2-1/8" trapway
- 10 x 12" water surface area
- Close-coupled Flushometer tank*
- Metal chrome trip lever
- Speed Connect[®] tank/bowl coupling system
- Sanitary dam on bowl
- 4 bolt caps
- 100% factory flush tested
- 3701.016 Elongated bowl with 4 bolt caps
- 3701.001 Same as above, Universal Bowl
- 4142.016 Flushometer tank complete with coupling components

Nominal Dimensions:

752 x 516 x 742mm (29-3/4" x 20-1/2" x 29-1/4")

Fixture only, seat and supply by others

Recommended working pressure range 25 psi - 80 psi

Alternate Configurations Available:

- 4142.600 Tank and tank cover only with tank cover locking device
- 4142.800 Tank and tank cover only with right hand trip lever
- 4142.900 Tank complete with right hand trip lever and tank cover locking device


Compliance Certifications -

Meets or Exceeds the Following Specifications: ASME A112.19.2-2008 / CSA B45.1-08 for Vitreous China Fixtures

To Be Specified:

- □ Color: □ White □ Bone □ Linen
- □ Seat: American Standard #5901.100.020
- □ Supply with Stop:



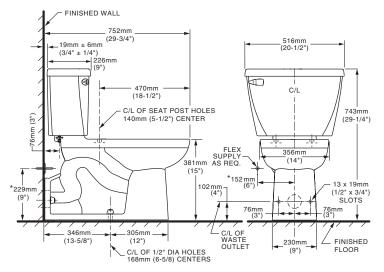

NOTES: WASTE OUTLET SEAL RING MUST BE NEOPRENE OR GRAPHITE-

SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY. DISTANCE FROM FLOOR TO CLOSET FLANGE CENTERLINE (ROUGH-

IN) MUST BE 4" (102 MM) WITH FLANGE SURFACE FLUSH TO 1/16" (1.5MM) MAX. BEYOND FINISHED WALL. * DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME A112.19.2-2008 / CSH B45.1-08. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.