For Residential and Commercial Applications							
Job Name	Engineer / Architect						
Job Location	Wholesaler						
Submittal Date	Contractor						

WB00/ WB10 7/8" OD Copper Water Heater Connectors – Female Iron Pipe x Female Iron Pipe

Use: For use in exposed locations only to connect water heaters and other water connected devices to the water supply

Design Features:

- Superior galvanic corrosion resistance. Patented internal dielectric sleeve effectively isolates dissimilar metals within the waterway to prevent galvanic corrosion
- **No dielectric union needed** with installation. Dielectric is built-in to the design of the connector
- Less torque to seal against the pliable rubber washer, especially on rough nipple surfaces
- Longer connector nuts allow a greater number of thread-to-thread contacts and a better seal
- **100**% Compliant (WB00 only)



Operating Specifications:

Temperature: 40° - 180° F (NSF61 maximum 82° C)

Pressure: water pressures up to 125 PSI maximum

CONNECTOR MATERIAL SPECIFICATIONS					
Tubing	Copper				
Dielectric Sleeve	Polypropylene				
Nut	Brass				
End Fitting	Brass				
Washer	Rubber				


Part Listing:

Ш	WB00-12N	7/8" OD X 12" connector with 3/4" FIP x 3/4" FIP end fittings
	WB00-15N	7/8" OD X 15" connector with 3/4" FIP x 3/4" FIP end fittings
	WB00-18N	7/8" OD X 18" connector with 3/4" FIP x 3/4" FIP end fittings
	WB00-24N	7/8" OD X 24" connector with 3/4" FIP x 3/4" FIP end fittings
	WB00-30N	7/8" OD X 30" connector with 3/4" FIP x 3/4" FIP end fittings
	WB00-36N	7/8" OD X 36" connector with 3/4" FIP x 3/4" FIP end fittings
	WB10-18N	7/8" OD X 18" connector with 1" FIP x 3/4" FIP end fittings





WB00/ WB10 7/8" OD Copper Water Heater Connectors – Female Iron Pipe x Female Iron Pipe

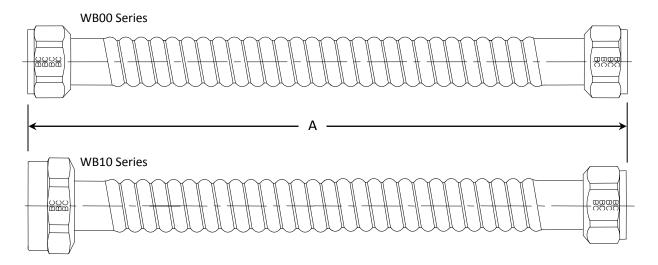

PART DIMENSIONS (Inches)									
Connector Length – Nut by Nut (±.31)									
Model	Dim.	12"	15"	18"	24"	30"	36"		
WB00	Α	12.31	15.31	18.31	24.31	30.31	36.31		
WB10	Α			18.31					

Listings & Certifications (WB00 Series only):

- IAPMO listed to ASME A112.18.6 and CSA B125 (File # 0452)
- CSA listed to CSA B125 (File # 204593)
- Compliant product CSA listed to Low Lead Content Certification Program – Plumbing Products Class 6853-01







