


SPECIFICATION: (example)



(FOR WALL HUNG, BACK INLET URINAL FIXTURE)

- Quiet action, TECK® concealed diaphragm flush valve
- Chloramine resistant diaphragm
- Forged brass diaphragm retainer
- Renewable seat
- **External water conserving flush volume adjustment,** factory set to 1.9 litre (0.50 gal.)
- Metal "non hold open" handle actuator
- Vandal resistant handle control can easily be located and installed anywhere within 6m (20') of flush valve
- Standard flush valve will install on all walls zero to 318mm (12-1/2") thick
- **1" FIP/copper sweat inlet adaptor** wheel handle angle check stop
- Adjustable 121mm (4-3/4") plus or minus 11mm (7/16") inlet/valve outlet centers
- Vacuum breaker
- **Recommended water supply:**
Minimum flowing pressure – 25 psi (172 kPa)
Minimum flow rate – 8 gpm (30 L/min)

FOR 3/4" WALL HUNG, BACK INLET URINAL FIXTURE: (with 3/4" copper sweat adaptor)



- ❑ **83T430**
with 16mm (5/8") dia. push button
- ❑ **83T431** 
with oscillating handle

OPTIONS: (Add dash number to end product required above.)

- 19 Factory set to 1.9 litre (0.5 gal.), 
Not Field Adjustable
- 05 Factory set to 0.5 litre (0.125 gal.), 
Not Field Adjustable



Approvals:

- IAPMO listed to ASSE 1037/ASME A112.1037/CSA B125.37
-  Oscillating Lever Handle
Indicates compliance to ICC/ANSI A117.1
-  Options -19 and -05 are
EPA WaterSense listed

(Contact Delta Representative for State and/or Local Approvals.)

Engineer/Architect Approval

Model Specified:


Approval:

Date:

Note: Measurements may vary ± 6mm (0.25")



83T431

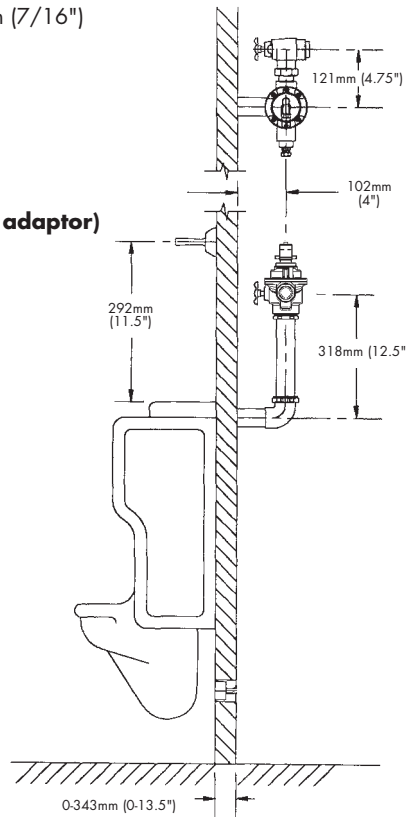

Note: For high and low pressure applications, please see page FEA-81T High Water Pressure note for more details.

Verify flow requirements with bowl manufacturer.