




BATHROOM FAUCET

■ Single Handle Deck Mount

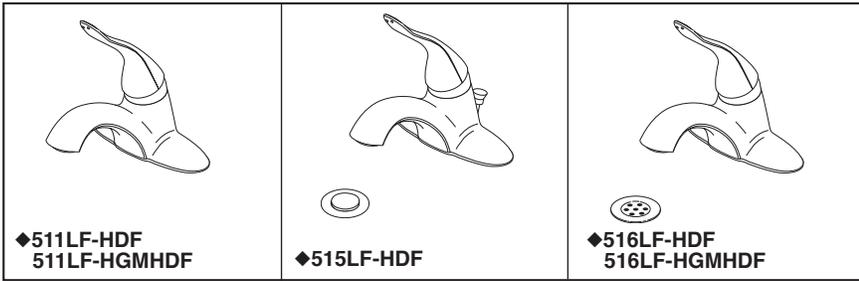

Submitted Model No.: _____
 Specific Features: _____

STANDARD SPECIFICATIONS:

- Max. flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa
- HGM models only - maximum 0.50 gpm @ 60 psi, 1.9 L/min @ 414 kPa
- Two and three hole mount
- Diamond coated ceramic cartridge
- Vandal resistant 6" (152 mm) elbow handle. Red/blue indicator markings
- Adjustable handle limit stop
- Vandal resistant aerator or spray outlet
- 1/4" threaded mounting studs
- 3/8" O.D. copper supply tubes with 1/2"-14 NPSM adapters




WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- Indicates compliance to ICC/ANSI A117.1 - Valve control only
- EPA WaterSense® - Applies to 511LF-HDF, 515LF-HDF, 516LF-HDF only
- Verified compliant with 0.25% weighted average Pb content regulations.

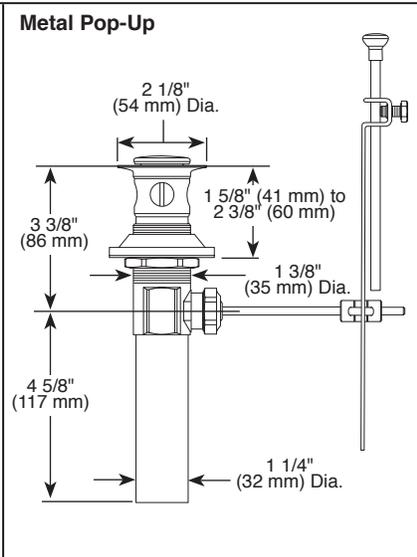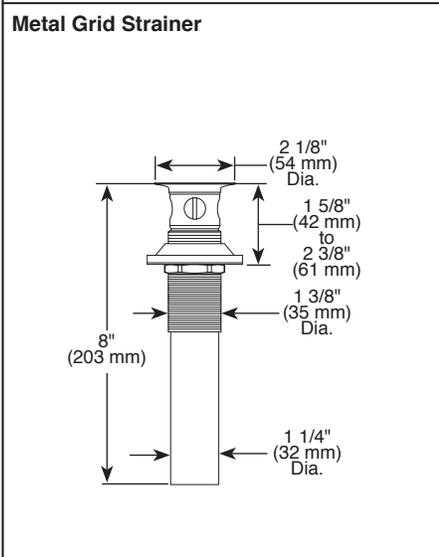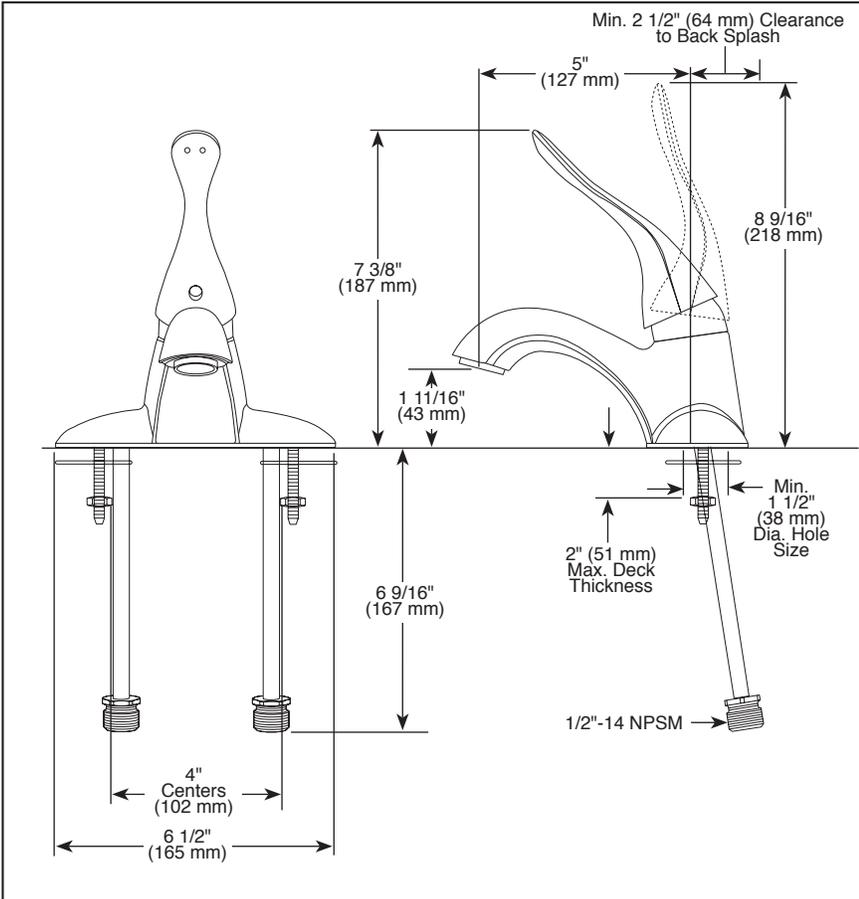

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.