

**Specification: (example)**

Cast brass institutional wallmounted shower head, polished chrome-plated finish, 30° spray angle from wall, concealed cast brass mounting plate, vandal resistant front mounting screws, 1/2" copper sweat inlet.  
Note: Not to be used as an anti-ligature device.

❑ **061125A**

- Shower MAX flow: 2.5 gpm @ 80 psi (9.5 L/min @ 552 kPa)
- Shower MIN flow: 2.5 gpm @ 45 psi (9.46 L/min @ 310 kPa)
- See Note 1



❑ **060793A**

- Shower MAX flow: 2.0 gpm @ 80 psi (7.6 L/min @ 552 kPa)
- Shower MIN flow: 1.5 gpm @ 45 psi (5.7 L/min @ 310 kPa)
- See Note 1



❑ **060991A**

- Shower MAX flow: 1.75 gpm @ 80 psi (6.6 L/min @ 552 kPa)
- Shower MIN flow: 1.6 gpm @ 45 psi (6.1 L/min @ 310 kPa)
- See Note 1



❑ **061011A**

- Shower MAX flow: 1.5 gpm @ 80 psi (5.7 L/min @ 552 kPa)
- Shower MIN flow: 1.4 gpm @ 45 psi (5.3 L/min @ 310 kPa)
- See Note 1



**Specification: (example)**

Forged brass 30° vandal-resistant wallmount showerhead.  
Note: Not to be used as an anti-ligature device.

❑ **063196A**

- Shower MAX flow: 1.5 gpm @ 80 psi (5.7 L/min @ 552 kPa)
- Shower MIN flow: 1.36 gpm @ 45 psi (5.15 L/min @ 310 kPa)
- See Note 1



❑ **063213A**

- Shower MAX flow: 1.75 gpm @ 80 psi (6.6 L/min @ 552 kPa)
- Shower MIN flow: 1.57 gpm @ 45 psi (5.93 L/min @ 310 kPa)
- See Note 1



❑ **063214A**

- Shower MAX flow: 2.0 gpm @ 80 psi (7.6 L/min @ 552 kPa)
- Shower MIN flow: 1.9 gpm @ 45 psi (7.21 L/min @ 310 kPa)
- See Note 1



❑ **RP43381**

- 3-Function Touch-Clean<sup>®</sup>, chrome-plated finish, brass ball showerhead.
- Shower MAX flow: 2.0 gpm @ 80 psi (7.6 L/min @ 552 kPa)
- Shower MIN flow: 1.6 gpm @ 45 psi (6.1 L/min @ 310 kPa)
- See Note 1



❑ **RP38357**

- Touch-Clean<sup>®</sup>, polished chrome-plated finish, brass ball showerhead.
- Shower MAX flow: 2.0 gpm @ 80 psi (7.6 L/min @ 552 kPa)
- Shower MIN flow: 1.5 gpm @ 45 psi (5.7 L/min @ 310 kPa)
- See Note 1



❑ **52672-15-BG**

- Chrome-plated brass ball showerhead
- Shower MAX flow: 1.5 gpm @ 80 psi (5.7 L/min @ 552 kPa)
- Shower MIN flow: 1.13 gpm @ 45 psi (4.3 L/min @ 310 kPa)
- See Note 1





❑ **RP46384**

- H<sub>2</sub>Okinetic Technology<sup>®</sup> showerhead.
- Shower MAX flow: 1.5 gpm @ 80 psi (5.7 L/min @ 552 kPa)
- Shower MIN flow: 1.13 gpm @ 45 psi (4.3 L/min @ 310 kPa)
- See Note 1




**Note 1**

Showerheads/handshowers are for use with automatic compensating valves rated at or less than the Shower MIN flow rate value.

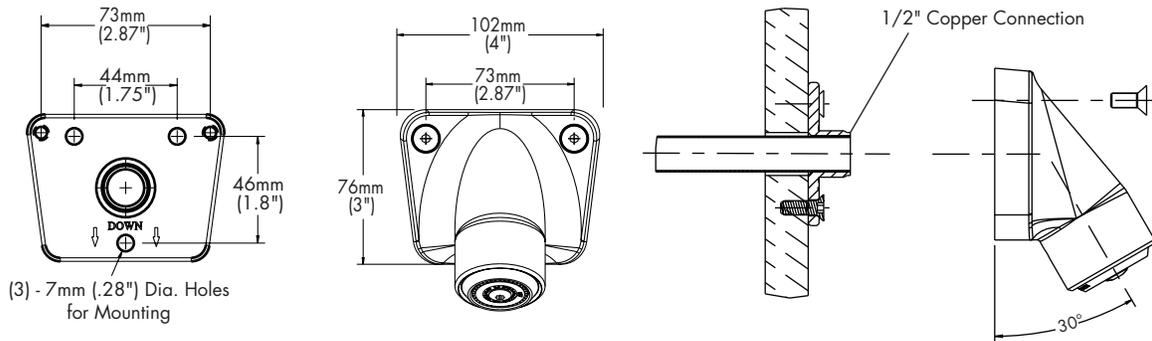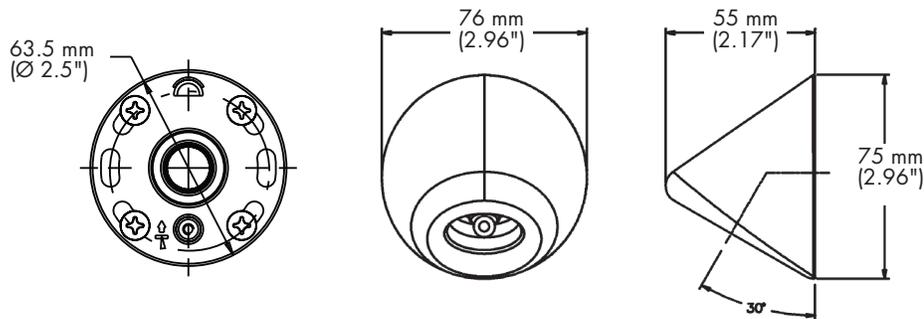
**060793A, 060991A, 061011A & 061125A SHOWERHEAD**
**ANCHOR PLATE**

**063196A, 063213A & 063214A SHOWERHEAD**


Note: Measurements may vary  $\pm 6$ mm (0.25")

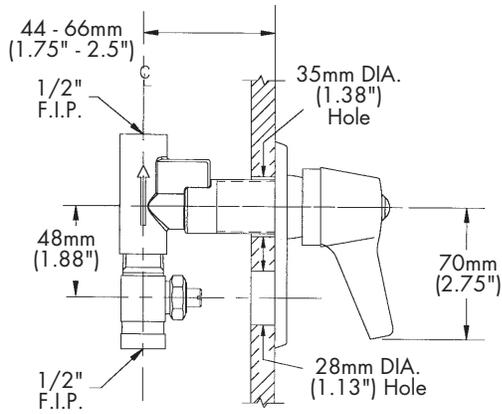
### 54T1200 CONTROL VALVE

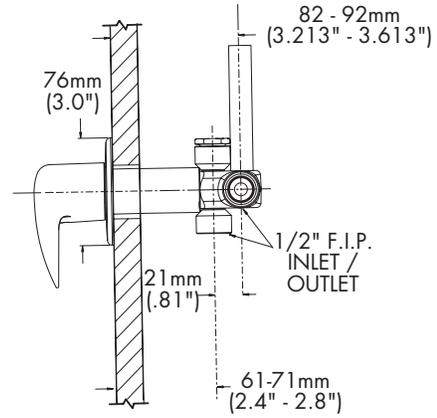


### 061058A DIVERTER VALVE



### 060274A WALL THERMOMETER

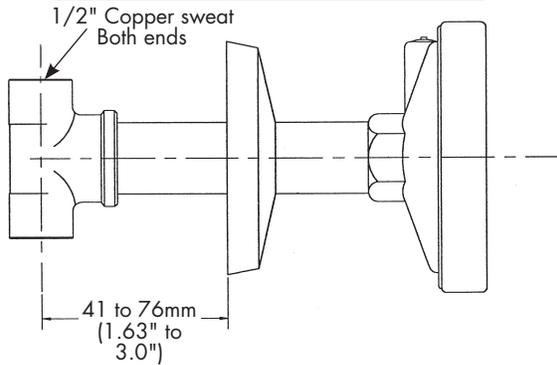

### 060605A TOE TESTER SPOUT

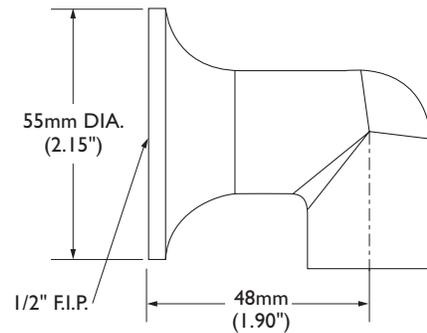

Note 1: This model is for use with automatic compensating valves rated at or less than the Shower MIN flow rate value. Refer to [www.specselect.com](http://www.specselect.com) for individual models.

Note: Use this page front and back as a product submittal sheet.