

# Single Water Faucets – Deckmount

**TECK®**  
COMMERCIAL

**DELTA®**

## FEATURES:

- Fits a maximum 1-1/4" diameter hole (7/8" diameter hole recommended)
- TECK® rigid/swivel gooseneck
  - unique design permits field installation as a rigid or swivel gooseneck
  - heavy-duty gooseneck made from seamless brass pipe
- All brass body with vandal resistant locking pin to prevent damage to counter top (can be removed in field if not required)
- Raised lockwasher to provide positive gripping during installation
- TECK® Lab structure
- C.P. renewable brass seat
- Two handle variations
  - 2 arm TECK® Lab handle
  - ADA compliant 2-3/4" lever blade handle
- Two vacuum breaker variations
  - Angled atmospheric vacuum breaker. Brass construction with durable silicone disk allowing high heat and water hammer shock resistance.
  - Dual check in-line vacuum breaker resulting in above average flow rate and consequently lower pressure loss
- Gooseneck can be oriented to suit left, center, or right handle operation

## 2 ARM LAB HANDLE PRODUCT

### With Gooseneck Spout

#### ❑ W6600

Deckmount single faucet with rigid/swivel gooseneck complete with vandal resistant locking pin, 1/4" I.D. 10 serration nozzle, shank, locknut, lockwasher, 2 arm lab handle, TECK® Lab structure, C.P. renewable brass seat, 1/4" NPT tailpiece and coupling nut

#### ❑ W6600-9

As W6600, but with in-line dual check vacuum breaker and nozzle

### With Angle Vacuum Breaker Spout

#### ❑ W6600-10

Deckmount single faucet with rigid/swivel angle vacuum breaker spout, complete with vandal resistant locking pin, 1/4" I.D. 10 serration nozzle, shank, locknut, lockwasher, 2 arm lab handle, TECK® Lab structure, C.P. renewable brass seat, 1/4" NPT tailpiece and coupling nut

#### W6600-9



#### W6600-10



## ADA COMPLIANT

### 2-3/4" LEVER BLADE HANDLE PRODUCT

### With Gooseneck Spout

#### ❑ W6600-C

Deckmount single faucet with rigid/swivel gooseneck complete with vandal resistant locking pin, 1/4" I.D. 10 serration nozzle, shank, locknut, lockwasher, ADA compliant 2-3/4" lever blade handle, TECK® Lab structure, C.P. renewable brass seat, 1/4" NPT tailpiece and coupling nut

#### ❑ W6600-9-C

As W6600-C, but with in-line dual check vacuum breaker and nozzle

### With Angle Vacuum Breaker Spout

#### ❑ W6600-10-C

Deckmount single faucet with rigid/swivel angle vacuum breaker spout, complete with vandal resistant locking pin, 1/4" I.D. 10 serration nozzle, shank, locknut, lockwasher, ADA compliant 2-3/4" lever blade handle, TECK® Lab structure, C.P. renewable brass seat, 1/4" NPT tailpiece and coupling nut

## MODEL NUMBER EXAMPLE:

Configurations vary, see below for availability.

**W 6 6 0 0 - 9 - R 4**

#### Body/Turret

0 = For up to 1-1/4" dia. hole

#### Outlet

Blank = serrated nozzle

9 = In-line vacuum breaker and serrated nozzle

10 = Angle vacuum breaker and serrated nozzle








C = 2.75" lever blade handle

R\* = Optional gooseneck

spout dimensions:

R4 = 6" long, 13.2" high

R7 = 9" long, 15.5" high

AVAILABLE MODELS 		VARIATION/OUTLET		
		Gooseneck Spout with Serrated Nozzle 6" long, 15" high 	Gooseneck Spout with In-line Vacuum Breaker and Serrated Nozzle 6" long, 15" high 	Gooseneck Spout with Angle Vacuum Breaker and Serrated Nozzle 6" long, 15" high 
<b>HANDLE</b>	2 Arm Laboratory Handle 	W6600	W6600-9 W6600-9-R4	W6600-10
	Lever Blade Handle 2.75" (70 mm)  	W6600-C W6600-R7C	W6600-9-C	W6600-10-C

## Not for potable water

Refer to [www.specselect.com](http://www.specselect.com) for individual models.

Note: Use this page front and back as a product submittal sheet.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.specselect.com](http://www.specselect.com) for finish options and product availability.


**DSP-W6600** Rev. E

# Single Water Faucets – Deckmount


**TECK<sup>®</sup>**  
COMMERCIAL

**DELTA**


- ❑ **W6600** (2 Arm – shown)
- ❑ **W6600-C** (Lever)

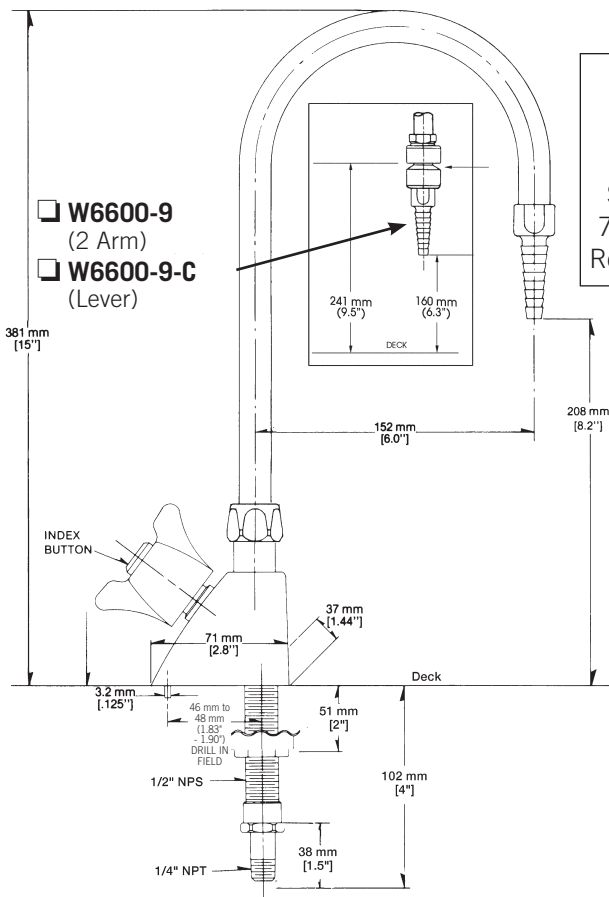

- ❑ **W6600-10** (2 Arm – shown)
- ❑ **W6600-10-C** (Lever)

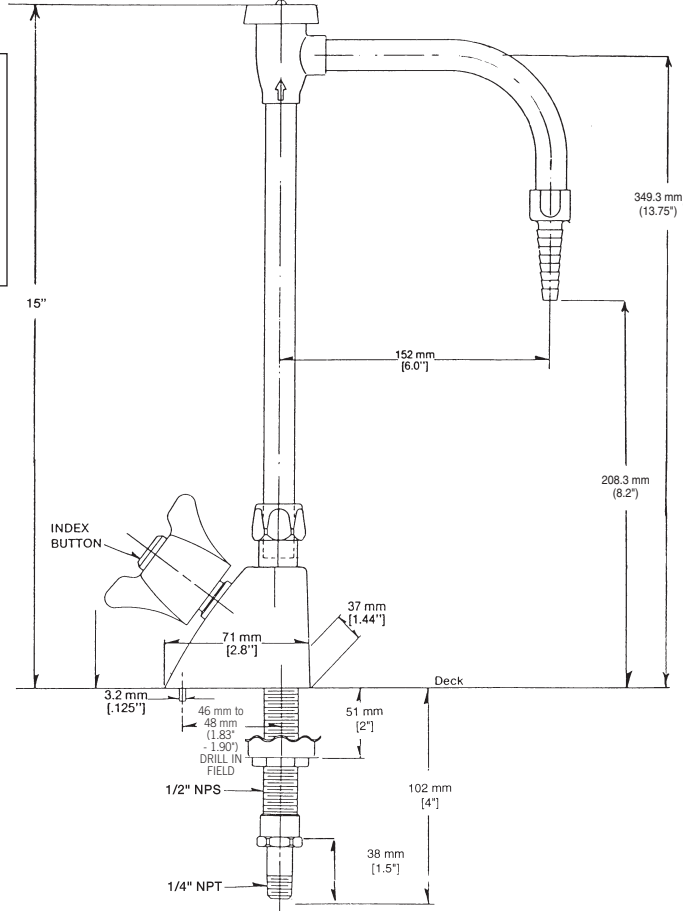


**2-3/4" LEVER BLADE  
HANDLE PRODUCT**



**Not for potable water.**

## WATER FLOW



**FLOW RATE - L/s (IGPM)**  
FOR  
3 - Compression valves with 6.4 mm (1/4") nozzles

**FOR OPTIONAL RIGID/SWIVEL SPOUTS**  
See **DSP-LABSP0pt** for detailed specification.

## Approvals and Standards Met:

- CSA certified.  
Complies to ASME A112.18.1/CSA B125.1
- Indicates compliance to ICC/ANSI A117.1  
when 2-3/4" lever blade handle is used

In-line VB tested and approved in conformance with ASSE 1035  
"Laboratory Faucet Vacuum Breakers".

CSA certified to B64.7

Angle VB tested and approved in conformance with ASSE 1001  
and CSA B64.1.1

Note: Measurements may vary  $\pm 6$  mm (0.25")

Refer to [www.specselect.com](http://www.specselect.com) for individual models.

Note: Use this page front and back as a product submittal sheet.

**DSP-W6600 Rev. E**

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.specselect.com](http://www.specselect.com) for finish options and product availability.