

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :


Description

High Performance Polymer PEX Insert × FNPT swivel adapters.

Technical Data

Material:..... Modified Polyphenylsulfone
Operating Pressure Rating:..... 180°F @ 100 psi (82.2°C @ 0.69 MPa)

Dimension Diagram

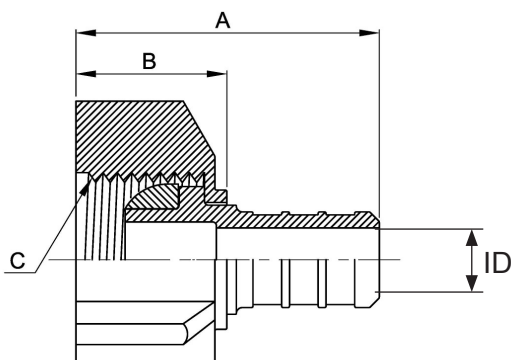

Listings

ICC-ES PMG 1087
cNSFus-pw
cQALus P371

Codes

IMC
IPC
IRC
NPC of Canada
NSPC
UMC
UPC

Standards

ASTM E84
ASTM F877
ASTM F2159
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372
ULC S102.2

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- PEX-a Potable Water Press System Installation Guide (L3235)
- HeatLink Limited Plumbing Warranty

Qty	Stk #	Size	Dimension, in / (mm)				Weight, lb / (kg)
			A	B	C	ID	
	17755	1/2" PEX × 1/2" FNPT Faucet Adapter	1.46 (37.3)	0.74 (19.0)	1/2" NPSM	0.31 (8.0)	0.023 (0.011)
	17705	1/2" PEX × Ballcock/Closet FNPT	1.70 (43.2)	0.87 (22.1)	7/8" Ballcock	0.31 (8.0)	0.023 (0.011)
	17722	3/4" PEX × 3/4" FNPT	1.58 (40.3)	0.86 (22.0)	3/4" NPSM	0.46 (11.6)	0.042 (0.019)

This page is intentionally blank.