


# Lead Free Brass Ball Valve



2 Piece • Full Port • Press XLC Connection • 200 WOG



JP-100G XLC

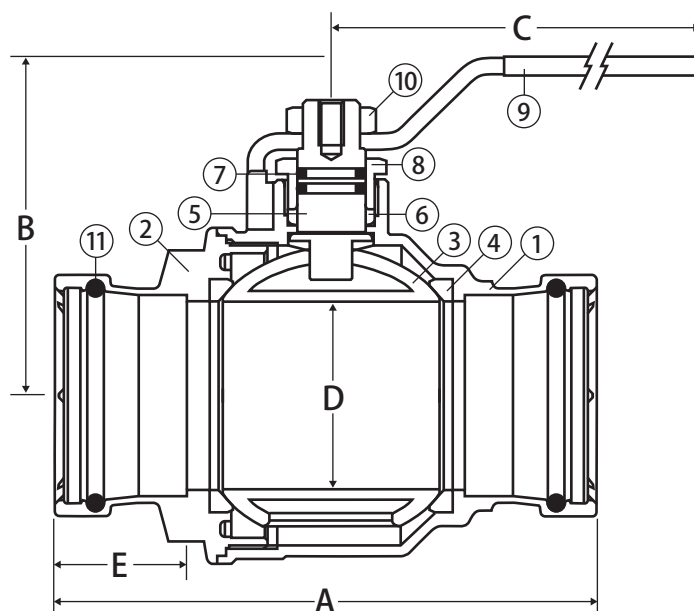

## Features

- Dezincification resistant brass alloy
- Triple sealing stem with 2 FKM o-rings and PTFE G300 seal
- Blow-out proof stem
- 100% leak tested
- 100% Made in Italy
- Leakproof stem - Lifetime Warranty
- Wetted surfaces contain less than .25% lead content
- Accessories available

## Approvals

- Conforms to IAPMO PS 117
- Meets ISO 6509

## Pressure/Temperature Rating

- 200 WOG
- Max. 250°F



**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and lead, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



## Material Specifications

| No. | Part            | Materials                    |
|-----|-----------------|------------------------------|
| 1   | Body            | Lead Free Brass - CW511L     |
| 2   | End Connection  | Lead Free Brass - CW511L     |
| 3   | Ball            | Chrome Plated Brass - CW510L |
| 4   | Seat (2)        | PTFE G300                    |
| 5   | Stem            | Lead Free Brass - CW510L     |
| 6   | Packing         | PTFE G300                    |
| 7   | Stem O-ring (2) | FKM                          |
| 8   | Packing Gland   | Brass - CW614N               |
| 9   | Handle          | Steel - Geomet® Plated       |
| 10  | Handle Nut      | Brass - CW614N               |
| 11  | O-ring (2)      | EPDM                         |

## Dimensions

| Part No.    | Size   | A     | B    | C    | D    | E    | Cv     |
|-------------|--------|-------|------|------|------|------|--------|
| 100-209XLCG | 2-1/2" | 7.13  | 4.72 | 8.00 | 2.46 | 1.75 | 350.32 |
| 100-210XLCG | 3"     | 8.49  | 5.31 | 8.00 | 2.99 | 1.92 | 563.76 |
| 100-211XLCG | 4"     | 10.79 | 5.90 | 9.88 | 4.00 | 2.22 | 879.28 |