


Lead Free Brass Ball Valve



**2 Piece • Full Port • Press x Hose Connection • 250 WOG
With Hose Cap**



JP-100HCG

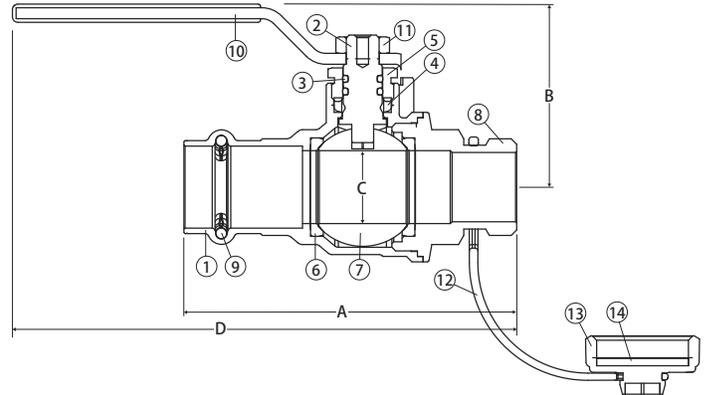

Features

- Dezincification resistant brass alloy
- Triple sealing stem with 2 FKM o-rings and PTFE G300
- Blow-out proof stem
- 100% leak tested
- 100% Made in Italy
- Leakproof stem - Lifetime Warranty
- Wetted surfaces contain less than .25% lead content
- Hose connection with strapped cap

Approvals

- NSF/ANSI/CAN 61-G
- ANSI B1.20.7
- Conforms to IAPMO PS 117
- Meets ISO 6509

Pressure/Temperature Rating

- 250 WOG
- Max. 250° F

 **WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, and lead, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



Material Specifications

No.	Part	Materials
1	Body	Lead Free Brass - CW511L
2	Stem	Lead Free Brass - CW510L
3	O-Ring (2)	FKM
4	Packing	PTFE G300
5	Packing Gland	Brass - CW614N
6	Seat (2)	PTFE G300
7	Ball	T.E.A. Coated Lead Free Brass - CW510L
8	End Connection	Lead Free Brass - CW511L
9	O-Ring	EPDM
10	Handle	Steel
11	Nut	Steel
12	Tether	PVC
13	Cap	Brass - CW617N
14	Gasket	NBR

Dimensions

Part No.	Size	A	B	C	D
100-773G	1/2" Press x 3/4" Hose	3.23	1.57	0.59	4.53
100-774G	3/4" Press x 3/4" Hose	2.59	1.97	0.79	5.43