

SUBMITTAL SHEET

JOB NAME		ITEM TAG
JOB LOCATION		PART NUMBER
CONTRACTOR	DATE	
ENGINEER APPROVAL	DATE	



LEAD-FREE FLARE X MNPT ADAPTER
T-4100NL

Designed and manufactured for underground water service installations only.

Available in NPT nominal sizes 3/4" through 2".

Working Pressure, Non Shock (PSI)

3/4" - 1" - 100 psi up to 100° F


1-1/4" - 2" - 80 psi up to 100° F



Pictured:
T-4100NL

MATERIAL SPECIFICATION		
PART	MATERIAL	SPECIFICATION
1 Body	Bronze	ASTM B-62 UNS C83600/C89836
2 Flare nut	Bronze	ASTM B-62 UNS C83600

DIMENSIONS					
Size	A	B	C	D	Item No.
3/4"	0.65	3.26	1.53	0.90	313-004NL
1"	0.83	3.89	1.84	1.16	313-005NL
1-1/4"	0.73	4.08	2.37	1.41	313-006NL
1-1/2"	1.07	4.80	2.91	1.71	313-007NL
2"	1.25	5.69	3.54	2.18	313-008NL

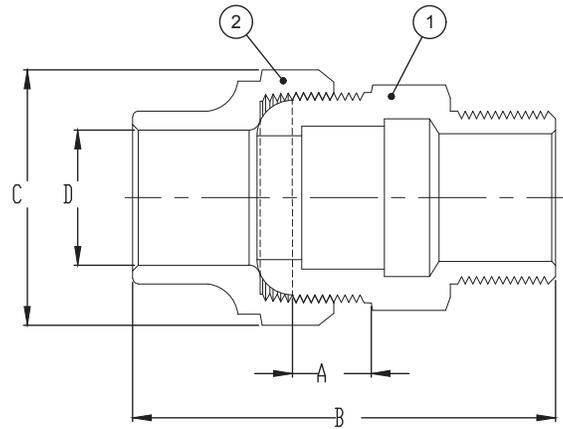

Pictured:
T-4100NL
Cut-away

Certifications/Listings:

Third-party certified.

ANSI/NSF 61: Drinking water system components health effects.

ANSI/NSF 372: Drinking water system components-lead content.

Standards:

AWWA C800: Underground service line valves and fittings.

ANSI/ASME B1.20.1: Pipe threads, general purpose, Inch.