



A Moen Incorporated Brand



Garden Tub Valve

DESCRIPTION

- Brass construction
- 1/2" IPS connections with stainless steel flexible lines
- Six (6) individual boxes per master carton

OPERATION

- 1/4" turn operation
- Installs on 8" to 16" centers
- For use in deck thicknesses up to 1.5"

FLOW

- High volume cartridge yields 11.5 gpm (43.4 L/min) at 60 psi

CARTRIDGE

- Ceramic disc technology
- Non-metallic, non-ferrous, and plastic material

STANDARDS


- Third party certified to CSA B-125.1, ASME A112.18.1, ANSI A117.1, IAPMO, and all applicable requirements referenced therein, California Proposition 65, Illinois, Massachusetts, and Texas
- All CFG products are compliant to all plumbing codes that require 3rd party certification to the applicable plumbing/fitting standards

WARRANTY – RESIDENTIAL, COMMERCIAL

- Ten year limited warranty against defects in materials and manufacturing workmanship
- Refer to the installation instructions enclosed with each CFG product or call 1-888-450-4910 for complete warranty information

CRITICAL DIMENSIONS

- Valve bodies install through 1-1/4" (32mm) minimum diameter holes
- Spout post installs through .88" (22.4mm) minimum diameter hole
- Maximum deck thickness 1-1/2" (38mm)

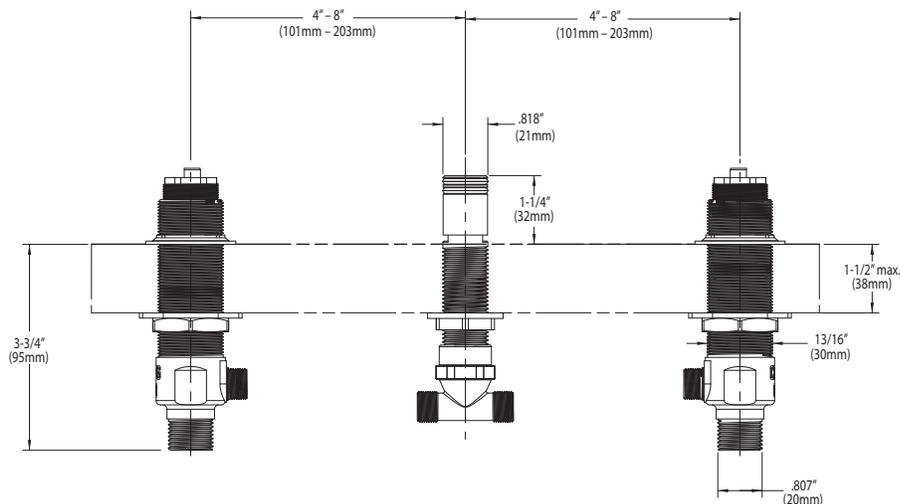

CRITICAL DIMENSIONS

(DO NOT SCALE)