

# Hotel / Motel Technical Specification


## Retractable Clothesline

# RR5506

### Stock Numbers:

- **RR5506HD – Retractable Clothesline**  
Polished Chrome Finish  
Locking Nut  
Spring Loaded String

### Dimensions:

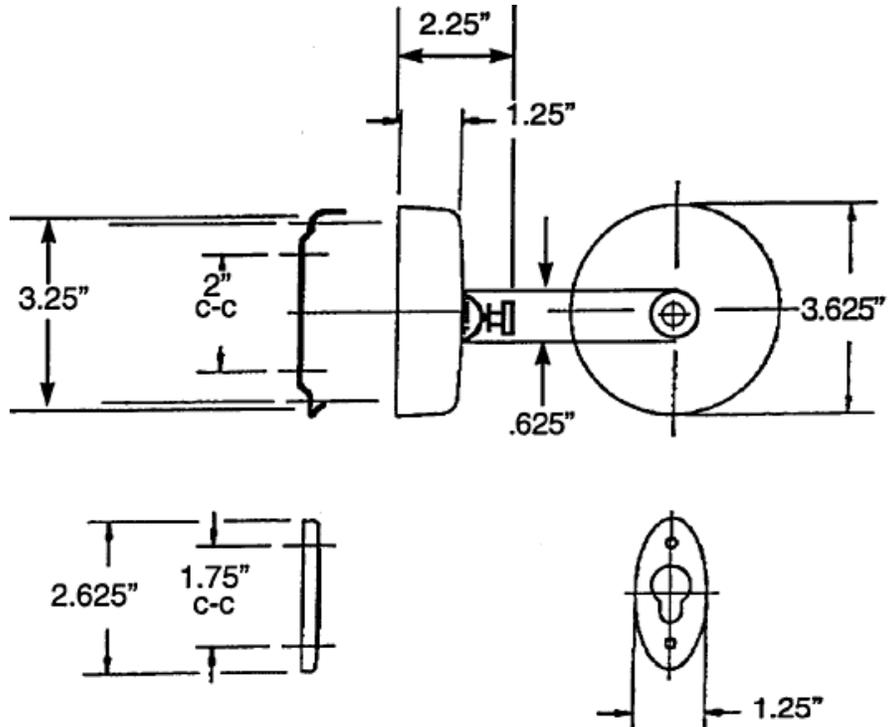

### Materials:

ALL CHROME BATH HARDWARE IS TRIPLE PLATED WITH COPPER, NICKEL AND CHROMIUM FOR LONG LASTING BEAUTY, AND MEET ASTM-B86 STANDARDS.

**Retractable Clothesline** base is 20 gauge galvanized steel. Wall plate is 16 gauge zinc plated steel. Cover is 23 gauge brass. Cover and flange have a polished brass or polished chrome (triple plated) finish. Cord flange is 21 gauge brass. Spring is type 301 high-tensile stainless strip .008" thick x 1.25" wide. Cord is 10' nylon. Cord knob is nylon.

### Installation Instructions:

Mount wall plate vertically keeping the flat side against the wall with hook at bottom, using the two #8 x 1 1/4" roundhead zinc plated steel screws (provided). Mount unit to wall plate and secure with set screw. Install cord flange on opposite wall, with larger opening on top, using two #9 x 3/4" flathead zinc plated screws provided.

Note: Wood blocking is preferable behind all wall surfaces. If wood blocking is not available, the following optional fasteners are suggested: Tile/Masonry – Plastic or Lead Anchors; Plaster/Drywall – Toggle Bolts.

**Stock Number:** \_\_\_\_\_ **Retractable Clothesline**  
**By Creative Specialties**



25300 AL MOEN DRIVE • NORTH OLMSTED, OH 44070  
CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636  
INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726  
CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720  
WWW.MOEN.COM

©Copyright Creative Specialties International

Literature #BA1665