

DESCRIPTION

- Brass construction
- Valve Kit includes valve and tub spout manifold
- Available with 1/2" CC/IPS, PEX, and Cold Expansion PEX connections
- Valve outlet matches manifold inlet connection type
- 1/4 turn shutoffs included for serviceability

OPERATION

- Supplied Flush Plug allows testing up to 200 PSI with air (300 PSI water)

FLOW

- Tub Faucet is designed to deliver 8 GPM/min (30.28 L/min) at 60psi
- **Note:** Installation that is inconsistent with Moen recommendations may degrade flow rate. Moen recommends trim spout extends 3.5" minimum from spout outlet's mid-point to tub's inner wall for optimal performance.

CARTRIDGE


- Cartridge is supplied in the Wallmount Tub Filler Trim Kit

STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein
- **ADA** for lever handle

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

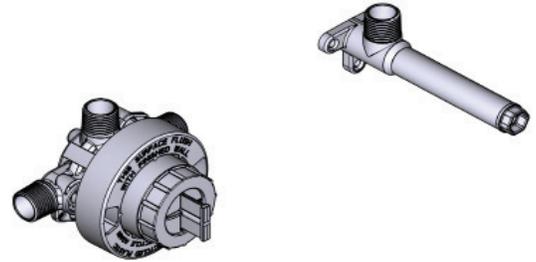

Rough-in Wall Mount Tub CC/IPS

MODELS: WMV130CIS CC/IPS
WMV130CXS COLD Expansion PEX
WMV130XS PEX

ADA

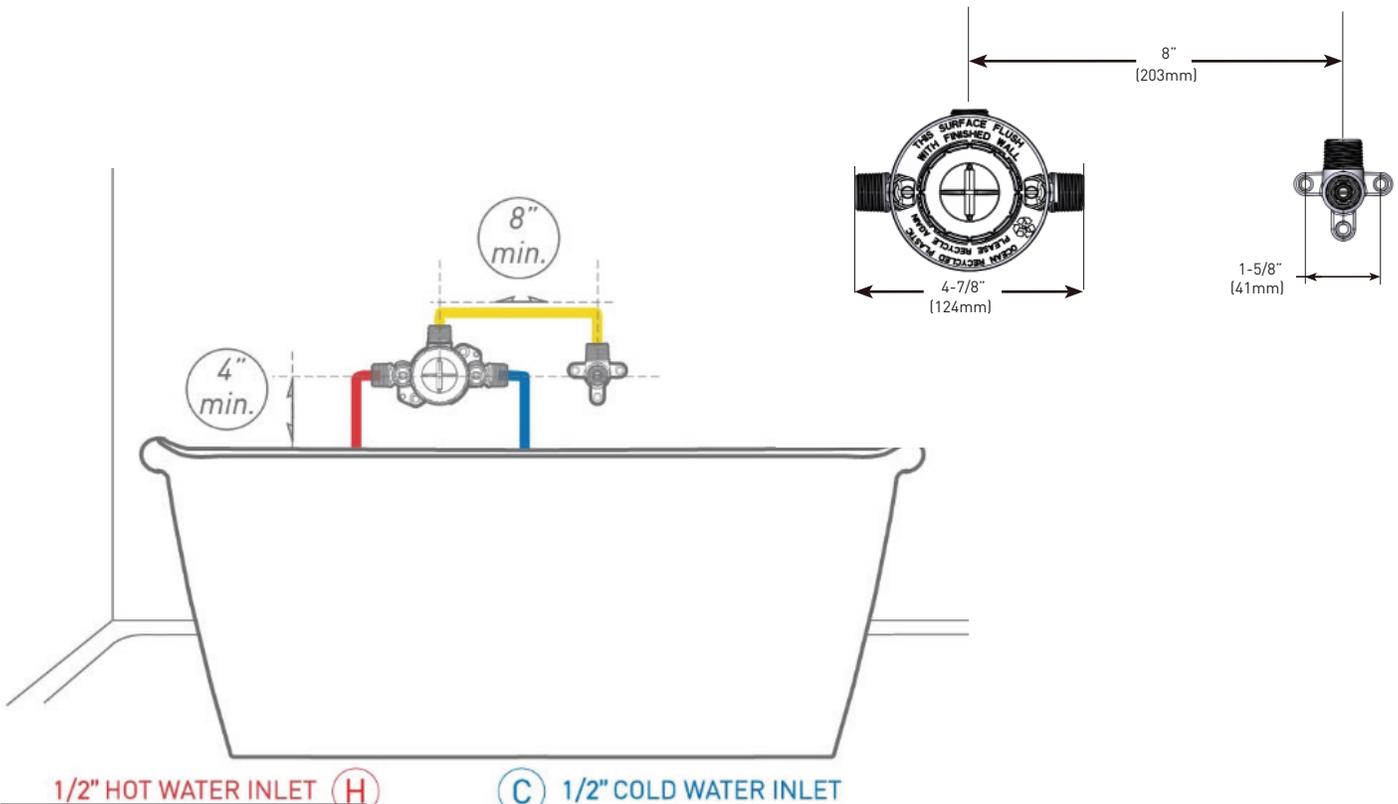

1/2" HOT WATER INLET (H)

(C) 1/2" COLD WATER INLET



CRITICAL DIMENSIONS
DO NOT SCALE