


# MT959K

## REPLACEMENT AIR SWITCH BUTTON WITH KNURLING

### SPECIFICATION SHEET

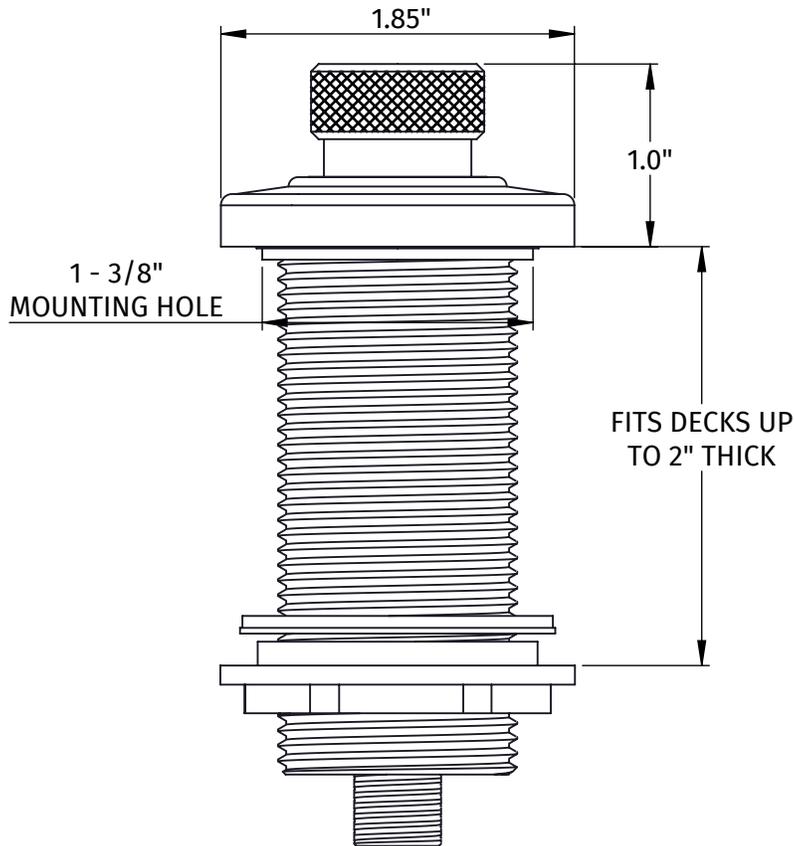

- REPLACEMENT AIR SWITCH BUTTON FOR MT951, MT953, AND OTHER MANUFACTURER'S AIR SWITCHES
- REQUIRES 1 - 3/8" MOUNTING HOLE
- WILL FIT UP TO 2" THICK DECK
- AIR ACTUATED
- ELECTRICAL BOX & AIR HOSE NOT INCLUDED
- NO TOOLS REQUIRED FOR INSTALLATION
- SOLID BRASS BUTTON & FLANGE

#### WARRANTY

FOR WARRANTY INFO PLEASE VISIT [WWW.MOUNTAINPLUMBING.COM/PAGE/RESOURCES/WARRANTY](http://WWW.MOUNTAINPLUMBING.COM/PAGE/RESOURCES/WARRANTY)

#### FINISH CARE & MAINTENANCE

NEVER USE ANY HARSH ALKALI, ACID BASED DETERGENTS OR CLEANERS SUCH AS SOFT SCRUB®, SCRUBBING BUBBLES® OR COMET® TO CLEAN. DO NOT USE BRILLO® OR SCOTCH BRITE® PADS. THESE WILL ALL HARM THE FINISH. TO CLEAN, USE ONLY A DAMP SOFT CLOTH AND WIPE GENTLY. STANDARD WINDEX® CAN ALSO BE USED SPARINGLY. IT IS NOT NECESSARY TO WIPE HARD TO REMOVE SPOTS. TO MAINTAIN THE FINISH, WIPE WITH A SOFT DRY CLOTH AFTER USE. AN OCCASIONAL COAT OF PURE CARNAUBA WAX WITHOUT CLEANERS WILL HELP PROTECT THE FINISH.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

[www.mountainplumbing.com](http://www.mountainplumbing.com) 888-222-9140 fax 972-456-2719

form MT959K spec sht