

THIS SPACE FOR DESIGNER/ENGINEER APPROVAL


Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO# _____
Submitted By _____	Date _____	Other _____

H-2610W - Series

Forged Dezincification Resistant Brass Push Fittings


200 PSI / 200° F Max

ISO 9001




Lead free products are certified to ASSE 1061 & NSF/ANSI 61-G

Push End Connection
(for material identification)




NO.	DESCRIPTION	MATERIAL
1	BODY	BRASS
2	O-RING	EPDM
3	PROTECTOR	PLASTIC
4	GRIP RING	STAINLESS STEEL
5	RELEASE COLLAR	PLASTIC
6	NUT	BRASS
7	INNER LINING	PLASTIC


TEMP °F	WOG
100	200
150	200
200	200
250	N/A
300	N/A
350	N/A
366	N/A



Push x Push Straight Coupling							
Standard Brass		Lead Free		Size	A	B	C
Item #	Ctn/Case	Item#	Ctn/Case				
--	--	26101W	25/250	3/8"	3/8	1 5/8	3/8
--	--	26112W	25/250	3/8 x 1/2	3/8	1 7/8	1/2
26102*	10/100	26102W	25/250	1/2"	1/2	1 7/8	1/2
26103*	10/100	26103W	10/100	3/4"	3/4	2 3/16	3/4
26104	5/50	26104W	9/90	1"	1	2 3/8	1
--	--	26132W	15/150	3/4" x 1/2"	3/4	2 1/8	1/2
--	--	26143W	9/90	1" x 3/4"	1	2 1/2	3/4



Push x FIP Straight Connector							
Standard Brass		Lead Free		Size	A	B	C
Item #	Ctn/Case	Item#	Ctn/Case				
26202*	10/100	26202W	20/200	1/2"	1/2	1 5/8	1/2
26223	10/100	26223W	20/200	1/2" x 3/4"	1/2	1 11/16	3/4
26203	10/100	26203W	12/120	3/4"	3/4	1 11/16	3/4
26204	5/50	26204W	9/90	1"	1	2 1/4	1



Push x MIP Straight Connector							
Standard Brass		Lead Free		Size	A	B	C
Item #	Ctn/Case	Item#	Ctn/Case				
26302*	10/100	26302W	20/200	1/2"	1/2	1 3/4	1/2
--	--	26323W	20/200	1/2" x 3/4"	1/2	1 3/4	3/4
26303	10/100	26303W	15/150	3/4"	3/4	1 13/16	3/4
26304	5/50	26304W	9/90	1"	1	1 15/16	1
--	--	26343W	9/90	3/4" x 1"	3/4	2	1



Quality and Commitment Since 1954

www.webstonevalves.com • Tel: (800) 225-9529 • Fax (800) 336-5133

Webstone product specifications in U.S. customary units are approximate and are provided for reference only. Webstone reserves the right to change or modify product design, construction, specifications or materials without prior notice and without incurring any obligation to make such changes and modifications on Webstone products previously or subsequently sold.

2610-2610Wspec_0814144

THIS SPACE FOR DESIGNER/ENGINEER APPROVAL

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO# _____
Submitted By _____	Date _____	Other _____

H-2612W Series

Forged Dezincification Resistant Brass Push Fittings


200 PSI / 200° F Max

ISO 9001




Lead free products are certified to ASSE 1061 & NSF/ANSI 61-G


TEMP °F	WOG
100	200
150	200
200	200
250	N/A
300	N/A
350	N/A
366	N/A




NO.	DESCRIPTION	MATERIAL
1	BODY	BRASS
2	O-RING	EPDM
3	PROTECTOR	PLASTIC
4	GRIP RING	STAINLESS STEEL
5	RELEASE COLLAR	PLASTIC
6	NUT	BRASS
7	INNER LINING	PLASTIC



Lead Free		Size	A	B	C	D	E
Item#	Ctn/Case						
26502W	12/120	1/2"	1/2	2 1/2	1 3/8	1/2	1/2
26503W	12/120	3/4"	3/4	3 1/8	1 5/8	3/4	3/4
26522W	18/180	3/4" x 1/2" x 1/2"	3/4	2 13/16	1 5/16	1/2	1/2
26532W	15/150	3/4" x 3/4" x 1/2"	3/4	2 7/8	1 7/16	3/4	1/2
26533W	12/120	3/4" x 1/2" x 3/4"	3/4	2 7/8	1 1/2	1/2	3/4
26504W	6/60	1"	1	3 5/8	1 15/16	1	1
26543W	6/60	1" x 1" x 3/4"	1	3 3/8	1 3/4	1	3/4

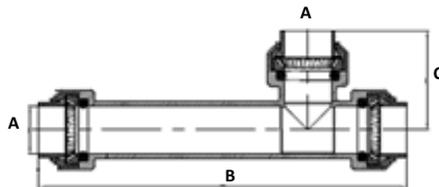

ITEM # Lead Free	Size	Ctn/Case	A	B	C
26702W	1/2"	8/80	1/2	7/8	5 1/16
26703W	3/4"	6/60	3/4	7/8	5 5/16

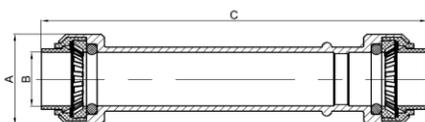

ITEM # Lead Free	Size	Ctn/Case	A	B	C
26722W	1/2"	8/80	1/2	5 1/16	1 1/16
26733W	3/4"	6/60	3/4	5 5/16	1 3/16

ITEM # Lead Free	Size	Ctn/Case	A	B	C
26122W	1/2"	15/150	1 1/16	1/2	4 1/2
26133W	3/4"	5/50	1 1/4	3/4	4 1/2
26144W	1"	5/50	1 5/8	1	4 1/2



Quality and Commitment Since 1954

www.webstonevalves.com • Tel: (800) 225-9529 • Fax (800) 336-5133

Webstone product specifications in U.S. customary units are approximate and are provided for reference only. Webstone reserves the right to change or modify product design, construction, specifications or materials without prior notice and without incurring any obligation to make such changes and modifications on Webstone products previously or subsequently sold.

2610-2610Wspec_0814144

THIS SPACE FOR DESIGNER/ENGINEER APPROVAL


Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO# _____
Submitted By _____	Date _____	Other _____

H-2620W - Series

Forged Dezincification Resistant Brass Push Fittings


200 PSI / 200° F Max

ISO 9001




Lead free products are certified to ASSE 1061 & NSF/ANSI 61-G

Push End Connection
(for material identification)




NO.	DESCRIPTION	MATERIAL
1	BODY	BRASS
2	O-RING	EPDM
3	PROTECTOR	PLASTIC
4	GRIP RING	STAINLESS STEEL
5	RELEASE COLLAR	PLASTIC
6	NUT	BRASS
7	INNER LINING	PLASTIC


TEMP °F	WOG
100	200
150	200
200	200
250	N/A
300	N/A
350	N/A
366	N/A



Push x Push Straight Coupling							
Standard Brass		Lead Free		Size	A	B	C
Item #	Ctn/Case	Item#	Ctn/Case				
--	--	26101W	25/250	3/8"	3/8	1 5/8	3/8
--	--	26112W	25/250	3/8 x 1/2	3/8	1 7/8	1/2
26102*	10/100	26102W	25/250	1/2"	1/2	1 7/8	1/2
26103*	10/100	26103W	10/100	3/4"	3/4	2 3/16	3/4
26104	5/50	26104W	9/90	1"	1	2 3/8	1
--	--	26132W	15/150	3/4" x 1/2"	3/4	2 1/8	1/2
--	--	26143W	9/90	1" x 3/4"	1	2 1/2	3/4



Push x FIP Straight Connector							
Standard Brass		Lead Free		Size	A	B	C
Item #	Ctn/Case	Item#	Ctn/Case				
26202*	10/100	26202W	20/200	1/2"	1/2	1 5/8	1/2
26223	10/100	26223W	20/200	1/2" x 3/4"	1/2	1 11/16	3/4
26203	10/100	26203W	12/120	3/4"	3/4	1 11/16	3/4
26204	5/50	26204W	9/90	1"	1	2 1/4	1



Push x MIP Straight Connector							
Standard Brass		Lead Free		Size	A	B	C
Item #	Ctn/Case	Item#	Ctn/Case				
26302*	10/100	26302W	20/200	1/2"	1/2	1 3/4	1/2
--	--	26323W	20/200	1/2" x 3/4"	1/2	1 3/4	3/4
26303	10/100	26303W	15/150	3/4"	3/4	1 13/16	3/4
26304	5/50	26304W	9/90	1"	1	1 15/16	1
--	--	26343W	9/90	3/4" x 1"	3/4	2	1



Quality and Commitment Since 1954

www.webstonevalves.com • Tel: (800) 225-9529 • Fax (800) 336-5133

Webstone product specifications in U.S. customary units are approximate and are provided for reference only. Webstone reserves the right to change or modify product design, construction, specifications or materials without prior notice and without incurring any obligation to make such changes and modifications on Webstone products previously or subsequently sold.

2610-2610Wspec_0814144

THIS SPACE FOR DESIGNER/ENGINEER APPROVAL


Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO# _____
Submitted By _____	Date _____	Other _____

H-2630W - Series

Forged Dezincification Resistant Brass Push Fittings


200 PSI / 200° F Max

ISO 9001




Lead free products are certified to ASSE 1061 & NSF/ANSI 61-G

Push End Connection
(for material identification)




NO.	DESCRIPTION	MATERIAL
1	BODY	BRASS
2	O-RING	EPDM
3	PROTECTOR	PLASTIC
4	GRIP RING	STAINLESS STEEL
5	RELEASE COLLAR	PLASTIC
6	NUT	BRASS
7	INNER LINING	PLASTIC


TEMP °F	WOG
100	200
150	200
200	200
250	N/A
300	N/A
350	N/A
366	N/A



Push x Push Straight Coupling							
Standard Brass		Lead Free		Size	A	B	C
Item #	Ctn/Case	Item#	Ctn/Case				
--	--	26101W	25/250	3/8"	3/8	1 5/8	3/8
--	--	26112W	25/250	3/8 x 1/2	3/8	1 7/8	1/2
26102*	10/100	26102W	25/250	1/2"	1/2	1 7/8	1/2
26103*	10/100	26103W	10/100	3/4"	3/4	2 3/16	3/4
26104	5/50	26104W	9/90	1"	1	2 3/8	1
--	--	26132W	15/150	3/4" x 1/2"	3/4	2 1/8	1/2
--	--	26143W	9/90	1" x 3/4"	1	2 1/2	3/4



Push x FIP Straight Connector							
Standard Brass		Lead Free		Size	A	B	C
Item #	Ctn/Case	Item#	Ctn/Case				
26202*	10/100	26202W	20/200	1/2"	1/2	1 5/8	1/2
26223	10/100	26223W	20/200	1/2" x 3/4"	1/2	1 11/16	3/4
26203	10/100	26203W	12/120	3/4"	3/4	1 11/16	3/4
26204	5/50	26204W	9/90	1"	1	2 1/4	1



Push x MIP Straight Connector							
Standard Brass		Lead Free		Size	A	B	C
Item #	Ctn/Case	Item#	Ctn/Case				
26302*	10/100	26302W	20/200	1/2"	1/2	1 3/4	1/2
--	--	26323W	20/200	1/2" x 3/4"	1/2	1 3/4	3/4
26303	10/100	26303W	15/150	3/4"	3/4	1 13/16	3/4
26304	5/50	26304W	9/90	1"	1	1 15/16	1
--	--	26343W	9/90	3/4" x 1"	3/4	2	1



Quality and Commitment Since 1954

www.webstonevalves.com • Tel: (800) 225-9529 • Fax (800) 336-5133

Webstone product specifications in U.S. customary units are approximate and are provided for reference only. Webstone reserves the right to change or modify product design, construction, specifications or materials without prior notice and without incurring any obligation to make such changes and modifications on Webstone products previously or subsequently sold.

2610-2610Wspec_0814144