



H-x056 - Y-Strainers


H-x056W Series

Forged DZR Brass Y-Strainer (20 Mesh)

w/ 1/2" Plugged NPT Port


Certifications

Certified to NSF/ANSI/CAN 61 & 372


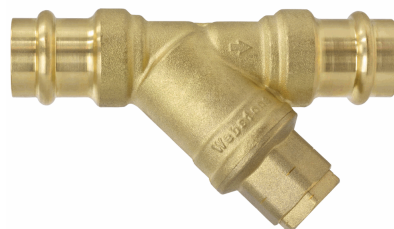


	Size (in)	Item#	Weight (lbs)	CTN Qty	Case Qty	A	B	C		
FIP									250 PSI CWP Max	200°F Max
	1/2"	H-40562W	0.49	8	80	2.60	2.00	3.25		
	3/4"	H-40563W	0.68	6	60	3.03	2.25	3.75		
	1"	H-40564W	0.84	4	40	3.31	2.50	4.00		
	1 1/4"	H-40565W	1.40	4	24	3.94	2.75	4.50		
	1 1/2"	H-40566W	1.98	2	20	4.33	3.00	5.00		
	2"	H-40567W	3.27	2	10	5.12	3.75	6.00		
G-Thread									200 PSI CWP Max	200°F Max
	1"	H-G0564W	1.04	1	18	3.54	2.50	4.00		
	1 1/2"	H-G0566W	2.31	1	8	4.72	3.00	5.00		
Press									250 PSI CWP Max	200°F Max
	1/2"	H-80562W	0.54	12	72	4.06	2.00	3.25		
	3/4"	H-80563W	0.77	6	48	4.84	2.25	3.75		
	1"	H-80564W	0.91	5	40	4.88	2.50	4.00		
	1 1/4"	H-80565W	1.39	4	24	5.71	2.75	4.50		
	1 1/2"	H-80566W	2.23	2	12	6.42	3.00	5.00		
	2"	H-80567W	3.49	2	8	7.64	3.50	6.00		
SWT									250 PSI CWP Max	200°F Max
	1/2"	H-50562W	0.37	8	80	2.36	2.00	3.25		
	3/4"	H-50563W	0.61	6	60	3.23	2.25	3.75		
	1"	H-50564W	0.77	4	40	3.54	2.50	4.00		
	1 1/4"	H-50565W	1.25	4	24	4.25	2.75	4.50		
	1 1/2"	H-50566W	1.87	2	20	4.92	3.00	5.00		
	2"	H-50567W	3.31	2	8	6.10	3.75	6.00		



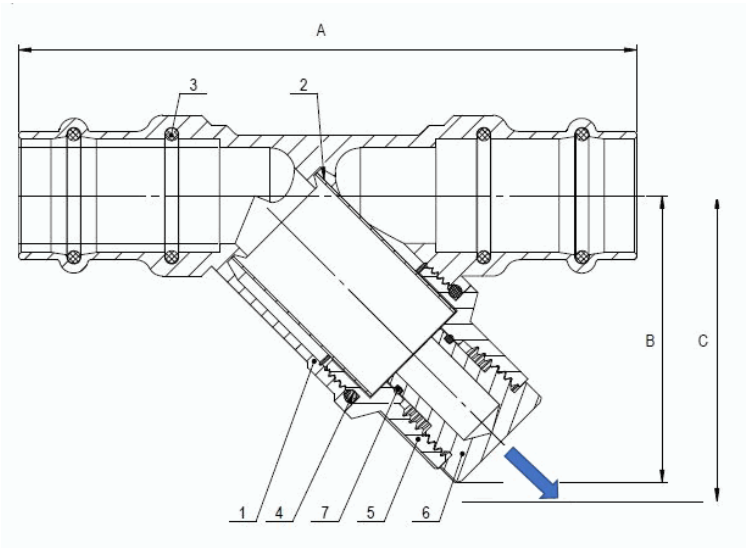

NO.	DESCRIPTION	MATERIAL
1	Body	Lead-Free DZR Brass
2	Strainer	Stainless Steel
3	O-Ring	EPDM
4	O-Ring	EPDM
5	Cap	Lead-Free DZR Brass
6	1/2 NPT Plug	Lead-Free DZR Brass
7	O-Ring	EPDM

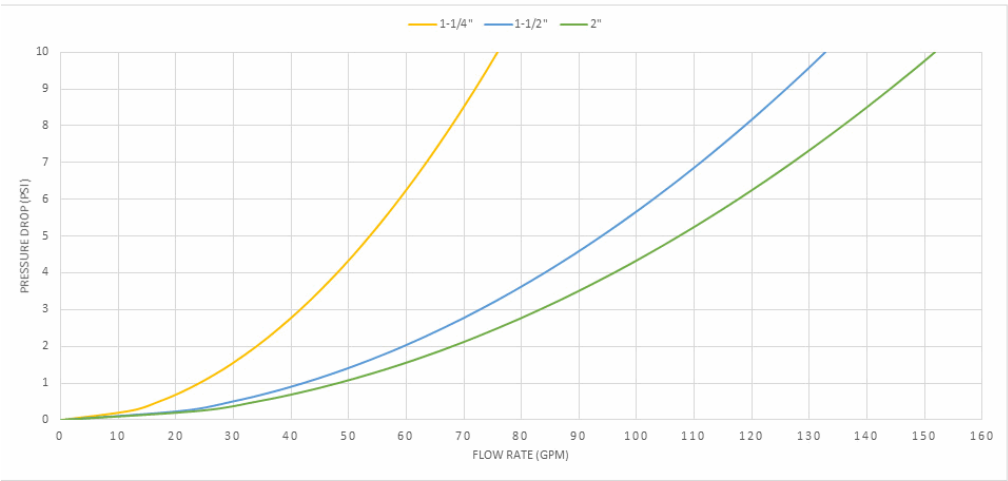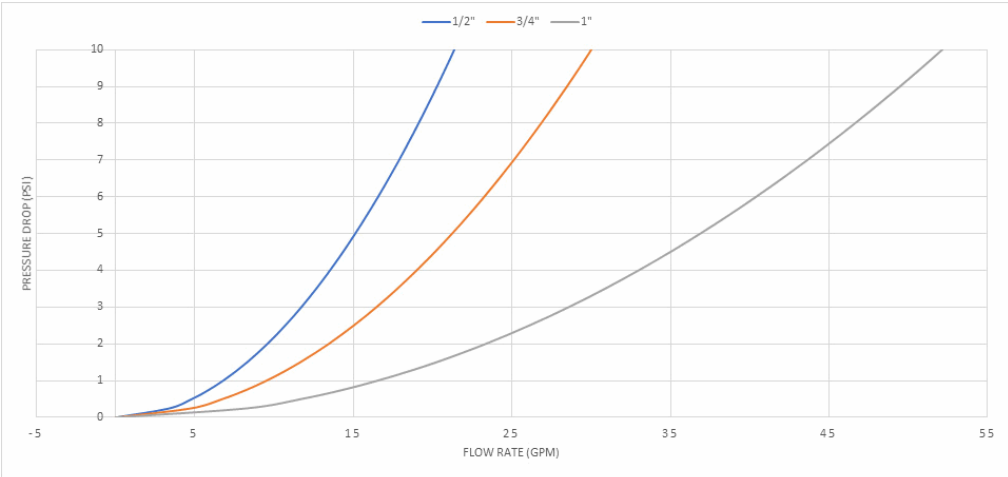

Specifications: Designed for use with water, oil, glycol mix in residential or commercial plumbing and heating systems. Threaded (NPT) ends comply with ANSI B1.20.1. Solder joint temperature ratings are per ASME B16.18 Annex A for 95-5 solder. Do not silver braze or overheat valves when soldering. G-threaded bodies require matching G-union fitting for installation. EPDM o-

