

H-x266-VR - Pro-Pal Water Heater Supply Valves w/ Vacuum Relief Valve

H-x266W-VR Series

Pro-Pal Water Heater Supply Valve

Full Port DZR Brass Ball Valve

w/ Union End

1/2" FIP Vacuum Relief Valve Port

(2) Plugged FIP Ports (1/2" & 1/8")

Includes Vacuum Relief Valve & Mounting Hardware


Certifications

Certified to NSF/ANSI 61 & 372



Size (in)	Item#	Weight (lbs)	CTN Qty	Case Qty	A	B	C	D		
FIP Union x FIP									150 PSI CWP Max	180°F Max
3/4" x 1/2"	H-42662W-VR	2.05	1	16	6.71	4.37	2.20	1.72		
3/4"	H-42663W-VR	2.05	1	16	6.71	4.37	2.20	1.72		
FIP Union x MIP									150 PSI CWP Max	180°F Max
3/4" x 1/2"	H-22662W-VR	2.05	1	16	6.57	4.37	2.20	1.72		
3/4"	H-22663W-VR	2.05	1	16	6.57	4.37	2.20	1.72		
FIP Union x Press									150 PSI CWP Max	180°F Max
3/4" x 1/2"	H-82662W-VR	2.08	1	16	7.47	4.37	2.20	1.72		
3/4"	H-82663W-VR	2.14	1	16	7.47	4.37	2.20	1.72		
FIP Union x Push									150 PSI CWP Max	180°F Max
3/4" x 1/2"	H-62662W-VR	2.12	1	16	7.02	4.37	2.20	1.72		
3/4"	H-62663W-VR	2.16	1	16	7.02	4.37	2.20	1.72		
FIP Union x SWT									150 PSI CWP Max	180°F Max
3/4" x 1/2"	H-52662W-VR	2.05	1	16	6.67	4.37	2.20	1.72		
3/4"	H-52663W-VR	2.06	1	16	6.67	4.37	2.20	1.72		



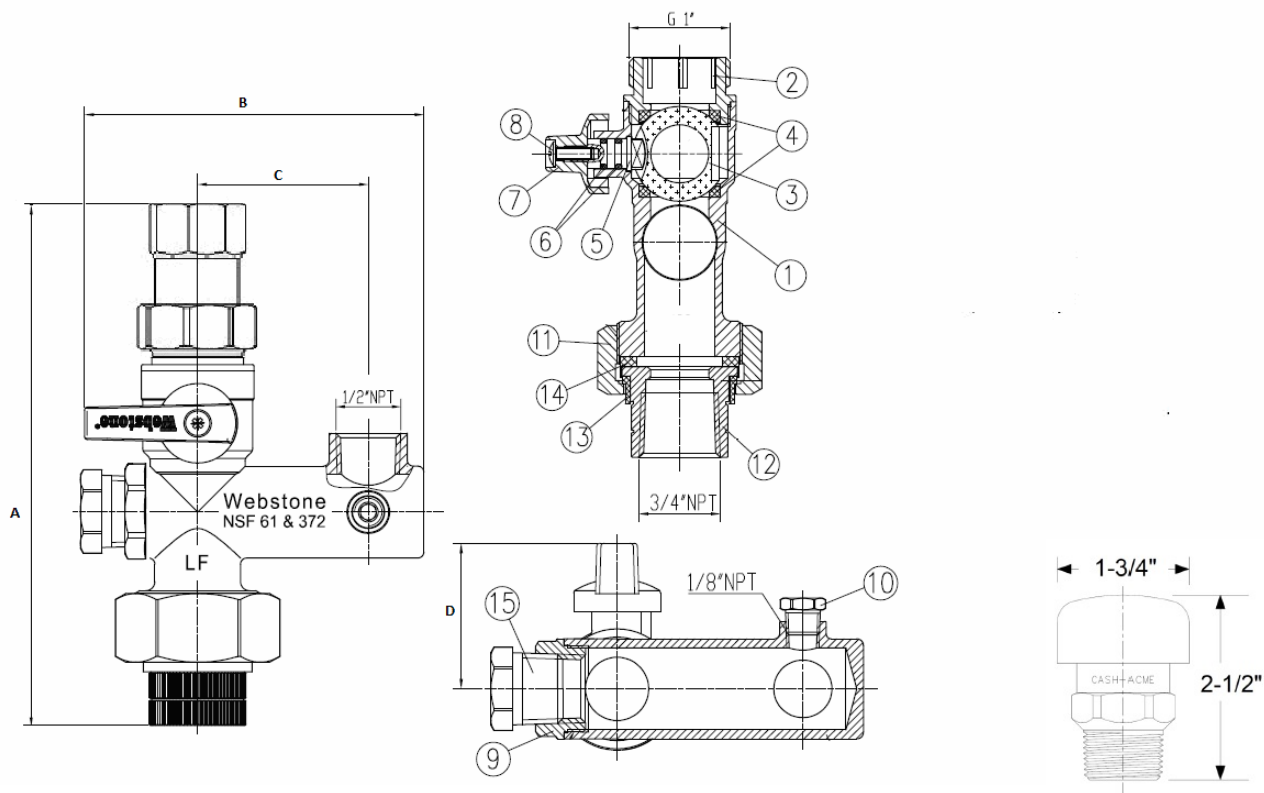

NO.	DESCRIPTION	MATERIAL
1	Body	Lead-Free DZR Brass
2	Cap	Lead-Free DZR Brass
3	Ball	Stainless Steel
4	Seat	PTFE
5	Stem	Lead-Free DZR Brass
6	O-ring	EPDM
7	Handle	Aluminum
8	Screw	Stainless Steel
9	Cap	Lead-Free DZR Brass
10	Plug	Lead-Free DZR Brass
11	Union Nut	Zinc Plated Steel
12	FIP Fitting	Lead-Free DZR Brass
13	Insulator Ring	PSU
14	Gasket	EPDM
15	Plug	Lead-Free DZR Brass

CASH ACME VR-801

SPECIFICATION DATA

Performance:

Relief pressure (open)	1" Hg vacuum
Capacity	13 SCFM (@ 2" Hg)
Maximum temperature	210° F
Maximum inlet pressure	200 psi
Service	Water

Materials:

Body	Brass
Body Cap	Brass
Internal Parts	Brass
Seat Disc	Silicone
Spring	Stainless steel
Dust Cover	Polypropylene

Specifications: Designed for use with water in residential or commercial plumbing systems. Threaded (NPT) ends comply with ANSI B1.20.1. Solder joint temperature ratings are per ASME B16.18 Annex A for 95-5 solder. Do not silver braze or overheat valves when soldering. EPDM o-rings for press ends.

REV:8/7/2023

LEAD-FREE: Weighted
average lead content ≤ 0.25%

WWW.WEBSTONEVALVES.COM



WARNING: Cancer and Reproductive
Harm - www.P65Warnings.ca.gov