



H-x410 - Transition Fittings - NPT Unions

H-x410W Series

Forged DZR Brass Union


Lead-Free

Certifications

Certified to NSF/ANSI/CAN 61 & 372



Size (in)	Item#	Weight (lbs)	CTN Qty	Case Qty	A	B	C	D		
FIP Union x FIP									200 PSI CWP Max	200°F Max
1/2"	H-44102W	0.26	10	100	0.50	0.50	1.29	1.86		
3/4" x 1/2"	H-44103W-R	0.32	10	100	0.75	0.50	1.29	2.22		
3/4"	H-44103W	0.41	10	80	0.75	0.75	1.58	1.99		
1"	H-44104W	0.55	10	60	1.00	1.00	1.97	1.98		
FIP Union x Press									200 PSI CWP Max	200°F Max
1/2"	H-84102W	0.23	10	100	0.50	0.50	1.29	2.02		
3/4" x 1/2"	H-84103W-R	0.29	10	100	0.75	0.50	1.29	1.99		
3/4"	H-84103W	0.37	10	80	0.75	0.75	1.58	2.28		
1"	H-84104W	0.54	10	60	1.00	1.00	1.97	2.41		
FIP Union x SWT									200 PSI CWP Max	200°F Max
3/4"	H-54103W	0.34	20	100	0.75	0.75	1.58	1.87		

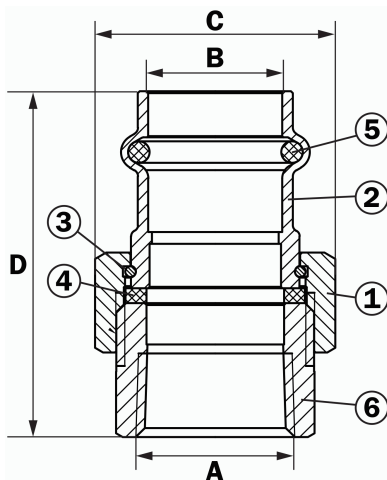

NO.	DESCRIPTION	MATERIAL
1	Locking Nut	Brass
2	Fitting End	Lead-Free DZR Brass
3	Clamp Ring	Stainless Steel
4	Gasket	EPDM
5	O-Ring	EPDM
6	Fitting Union	Lead-Free DZR Brass
7	O-Ring	EPDM

Specifications: Designed for use with water, oil, glycol mix in residential or commercial plumbing and heating systems. Threaded (NPT) ends comply with ANSI B1.20.1. Solder joint temperature ratings are per ASME B16.18 Annex A for 95-5 solder. Do not silver braze or overheat valves when soldering. EPDM o-rings for press ends.

