



# GALVANIZED BASE NO-CALK® ROOF FLASHINGS TECHNICAL SPECIFICATION

Job Name _____	Item # _____
Location _____	
Engineer _____	Contractor _____
PO # _____	Tag _____
Representative _____	

## SPECIFICATIONS

Oatey Galvanized Base No-Calk Roof Flashings can be used in commercial and residential applications where a watertight seal for roof penetrations around the plumbing vent pipe is required. Oatey Roof Flashings are IAPMO PS 64 certified and engineered to meet the following ASTM standards.

## STANDARDS

- ASTM D3274-09
- ASTM D660-93
- ASTM D661-93
- ASTM D3274-09


## APPROVALS AND LISTINGS



## DESCRIPTION

All dimensions in inches

- Roof Flashing slides over DWV pipe for pitch to 40°.
- Made of rust-proof, stamped 28 gauge galvanized steel.
- Non-fading sealing collar.
- Approved for Type B installations.
- Not for hot-mopped or built-up roofs.
- Do not use paint or petroleum based products on rubber collars.

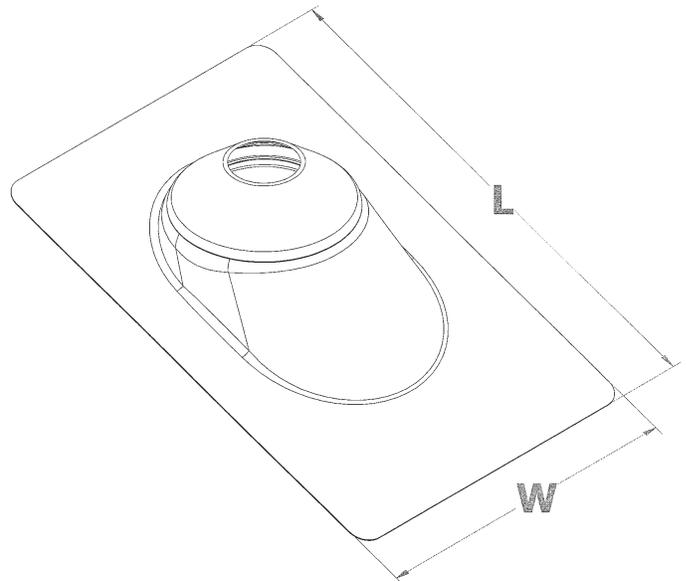

Access BIM/Revit content through [www.oatey.com](http://www.oatey.com)



# GALVANIZED BASE NO-CALK® ROOF FLASHINGS TECHNICAL SPECIFICATION

## PRODUCT SELECTOR

GALVANIZED BASE NO-CALK® ROOF FLASHINGS						
✓	Product Number	Description	Length (L)	Width (W)	Pack	Carton Weight
	11536	1-¼" Galvanized ESM Flashing	12-½"	8-¾"	25	27lbs.
	11549	1-½" Galvanized ESM Flashing	12-½"	8-¾"	25	32lbs.
	11552	2" Galvanized ESM Flashing	14-½"	10-¾"	25	28lbs.
	11565	2-½" Galvanized ESM Flashing	14-½"	10-¾"	25	30lbs.
	11830	½" – 1" Galvanized No-Calk Roof Flashing – Solar	12-½"	9"	12	11 lbs.
	11831	½" – 1" Galvanized No-Calk Roof Flashing – Solar	18"	18"	12	23 lbs.
	11840	1-¼" – 1-½" Galvanized No-Calk Roof Flashing	12-½"	9"	12	12 lbs.
	11841	1-¼" – 1-½" Galvanized No-Calk Roof Flashing	12-½"	9"	6	6 lbs.
	11853	2" Galvanized No-Calk Roof Flashing	12-½"	9"	12	12 lbs.
	11854	2" Galvanized No-Calk Roof Flashing	12-½"	9"	6	7 lbs.
	11866	3" Galvanized No-Calk Roof Flashing	14-½"	11"	12	17 lbs.
	11867	3" Galvanized No-Calk Roof Flashing	14-½"	11"	6	9 lbs.
	11879	4" Galvanized No-Calk Roof Flashing	15"	12"	12	23 lbs.
	11880	4" Galvanized No-Calk Roof Flashing	15"	12"	6	12 lbs.
	11960	1-¼" – 1-½" Galvanized No-Calk Roof Flashing – 28 Gauge	14"	14"	12	23 lbs.
	11961	2" Galvanized No-Calk Roof Flashing – 28 Gauge	14"	14"	12	23 lbs.
	11921	1-¼" – 1-½" Large Base Galvanized No-Calk Roof Flashing	18"	18"	12	23 lbs.
	11934	2" Large Base Galvanized No-Calk Roof Flashing	18"	18"	12	23 lbs.
	11947	3" Large Base Galvanized No-Calk Roof Flashing	18"	18"	12	23 lbs.
	11950	4" Large Base Galvanized No-Calk Roof Flashing	18"	18"	12	26 lbs.
	11861	1", 2", 3" Galvanized No-Calk Roof Flashing	14-½"	11"	6	7 lbs.
	11859	½" - 1" Galvanized Black 11" x 14-½" base	14-½"	11"	12	8.14 lbs
	11923	1-¼" – 1-½" Galvanized 18" x18" base	18"	18"	6	12.4 lbs
	11936	2" Galvanized 18" x 18" base	18"	18"	6	12.45 lbs

Data is subject to manufacturing tolerances.

Access BIM/Revit content through [www.oatey.com](http://www.oatey.com)