

# SharkBite Max™

## Hammer Arrestor

SharkBite Max™ allows users to connect pipe with ease -no tools needed. This new design features a stainless steel retainer for extra strength, higher pressure ratings and a lower insertion effort than previous versions of SharkBite Brass Push-to-Connect fittings. SharkBite Max fittings do not require a PEX stiffener and are compatible with PEX, copper, CPVC, PE-RT and HDPE\*.

### Applications

Absorbs shock and reduces water hammer in residential and commercial systems. Installed near quick-closing valves to protect pipes and fixtures. Suitable for hydronic heating/cooling (up to 50% glycol). Requires accessible location for maintenance.

### Specifications Data

#### Materials

Body	Lead-Free DZR Brass
O-ring	EPDM
Steel Retainer	304 Stainless Steel
Grab Ring	Stainless Steel

#### Performance

##### UR22630 Working Pressure

Max Static Pressure	125 psi
Max Spike Pressure	250 psi

##### UR22632 Working Pressure

Max Static Pressure	250 psi
Max Spike Pressure	400 psi

#### Pipe Insertion Depth


Fitting Size	Insertion Depth
1/2 in.	1.00 in.
3/4 in.	1.25 in.

### Certifications & Listings

ASME A112.4.14/CSA B125.14, NSF/ANSI 14, NSF/ANSI/CAN 61, NSF/ANSI/CAN 372

For listing information, please contact Customer Service

\* HDPE installations must use a tube stiffener. Sold separately by HDPE manufacturer.

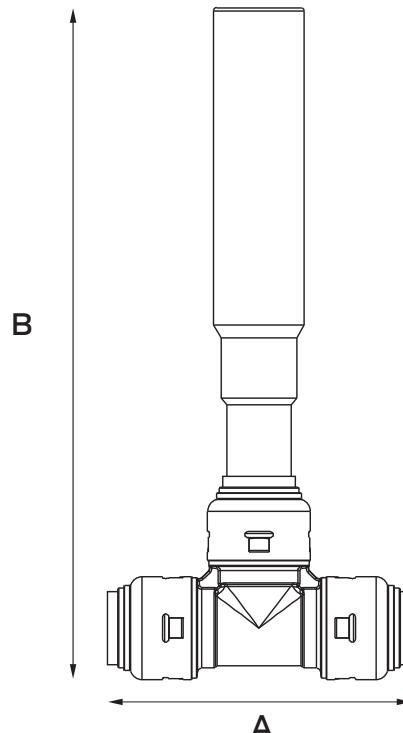

#### Dimensions (Inches)

Part #	Size	A	B
UR22630	1/2 in.	2.9	6.5
UR22632	3/4 in.	3.7	10.6

#### Product Submittal

Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	