

SharkBite Max™

Stub-Out

SharkBite Max™ allows users to connect pipe with ease -no tools needed. This new design features a stainless steel retainer for extra strength, higher pressure ratings (400 psi) and a lower insertion effort than previous versions of SharkBite Brass Push-to-Connect fittings. SharkBite Max fittings do not require a PEX stiffener and are compatible with PEX, copper, CPVC, PE-RT and HDPE*.

Applications

Provides a fixed connection point for water supply lines in residential and commercial potable water systems. Commonly used to stub out water connections for fixtures during installation, ensuring a clean and secure termination point.

Specifications Data

Materials

Body	Lead-Free DZR Brass
O-ring	EPDM
Steel Retainer	304 Stainless Steel
Grab Ring	Stainless Steel

Pipe Insertion Depth

Fitting Size	Insertion Depth
1/2 in.	1.00 in.
3/4 in.	1.25 in.

Performance


Max Working Pressure	
Max Pressure	400 psi
Max Temperature	200° F (93 °C)

Certifications & Listings

ASME A112.4.14/CSA B125.14, NSF/ANSI 14, NSF/ANSI/CAN 61, NSF/ANSI/CAN 372

For listing information, please contact Customer Service

* HDPE installations must use a tube stiffener. Sold separately by HDPE manufacturer.

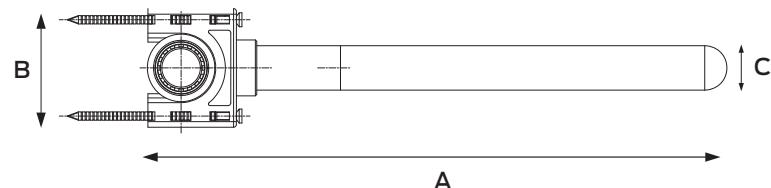

Dimensions (Inches)

Part #	Size	A	B	C
UR351	1/2 in.	8.1	1.8	1.0

Product Submittal

Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	