

Cash Acme™

BFP Dual Check Valve

The BFP Dual Check Valve prevents backflow of contaminated water into potable water supply lines. Suitable for hot or cold water under continuous pressure.

Approved Applications

Intended for use with boiler feed lines, dairy processing systems, livestock water sources, chlorinators, trap primers and similar installations.

Specification Data

Performance

Maximum Temperature	180°F (82.2°C)
Maximum Pressure	170 psi
Service	Water

Materials

1	Body	Lead-Free ¹ Bronze
2	Spring	Stainless steel
3	Strainer Screen	Stainless steel
4	O-Ring	Buna-N
5	Check Valve Body	Modified PPO


¹ Lead Free for all models, surfaces that are in contact with consumable water contain less than 0.25% lead by weight.

Certifications & Listings

ASSE 1012



Refer to local plumbing code

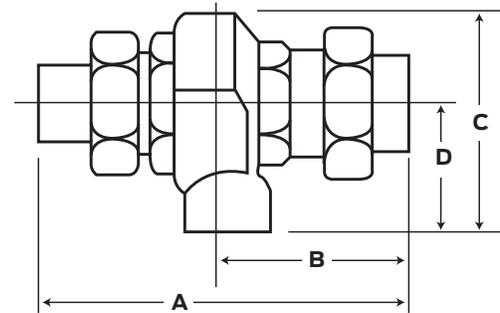

Dimensions (inches)

Size	Connection Style	Lead Free	Part #	A	B	C	D
1/2"	FNPT Union	Y	21574-0000LF	5-3/32	2-7/16	1-25/32	2-63/64
1/2"	Sweat Union	Y	22760-0000LF	5-3/32	2-7/16	1-25/32	2-63/64
3/4"	FNPT Union	Y	21575-0000LF	5-3/32	2-17/32	1-25/32	2-63/64
3/4"	Sweat Union	Y	22762-0000LF	5-3/32	2-17/32	1-25/32	2-63/64

Product Submittal

Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	

