
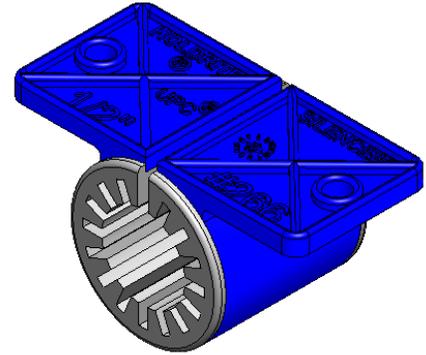


PRODUCT SPECIFICATION DRAWING

HOLDRITE® #266 thru #269 Clamps

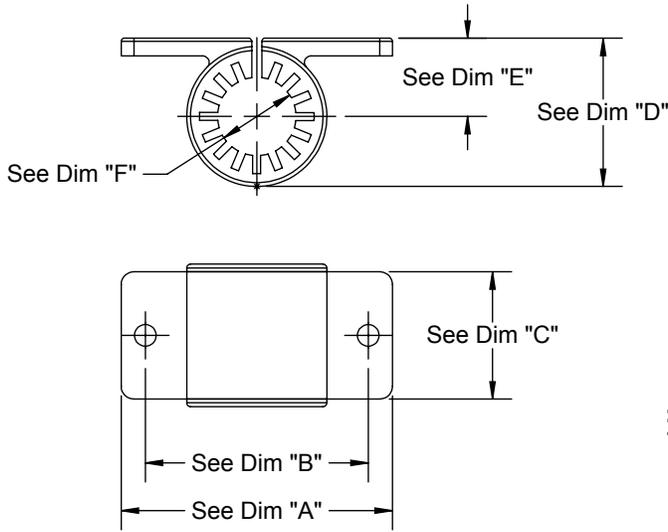

#266 Shown
Scale: None

Model	Size	A	B	C	D	E	F
#266	1/2"	2.13	1.75	1.00	1.17	.62	Ø.62
#267	3/4"	2.50	1.93	1.00	1.55	.81	Ø.87
#268	1"	2.75	2.27	1.45	1.82	.94	Ø1.12
#269	1-1/4"	2.88	2.50	1.45	2.07	1.07	Ø1.36

Model #'s 266 thru 269 can be used as a top mount or suspension hanger, e.g., from a joist or cross-member, or from a HOLDRITE Stout Bracket®. These models are used for securing and retaining tubing while providing superior acoustical isolation between the tubing and the supporting structure. Supports 1/2", 3/4", 1" & 1-1/4" CTS tube sizes. Supports Copper, PEX, CPVC tubing, conduit, etc. UPC listed.

Product Information:

- Material:
 - Shell: Polypropylene, blue, FR UL94-V2
 - Isolators: TPR, natural (off-white), 40 to 45 shore A
- Temperature Range: -10°F to 140°F (suspension)
- Load rating: 25 pounds in suspension mode
- IAPMO UPC / IPC listed
- IAPMO listed, per standard PS42-2013



THIS INFORMATION IS PROPRIETARY TO HOLDRITE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION.

HOLDRITE®

CONVERTING MAKESHIFT METHODS INTO ENGINEERED SOLUTIONS™

800-321-0316 OR 760-744-6944 / FAX: 760-744-0507 / WWW.HOLDRITE.COM
spec_266 thru 269_RevA

Product Submittal	
Job Name:	
Date:	
Part Number:	Qty:
Architect / Owner:	
Contractor:	
Notes:	