


PRODUCT SPECIFICATION DRAWING

PEXRITE® #706

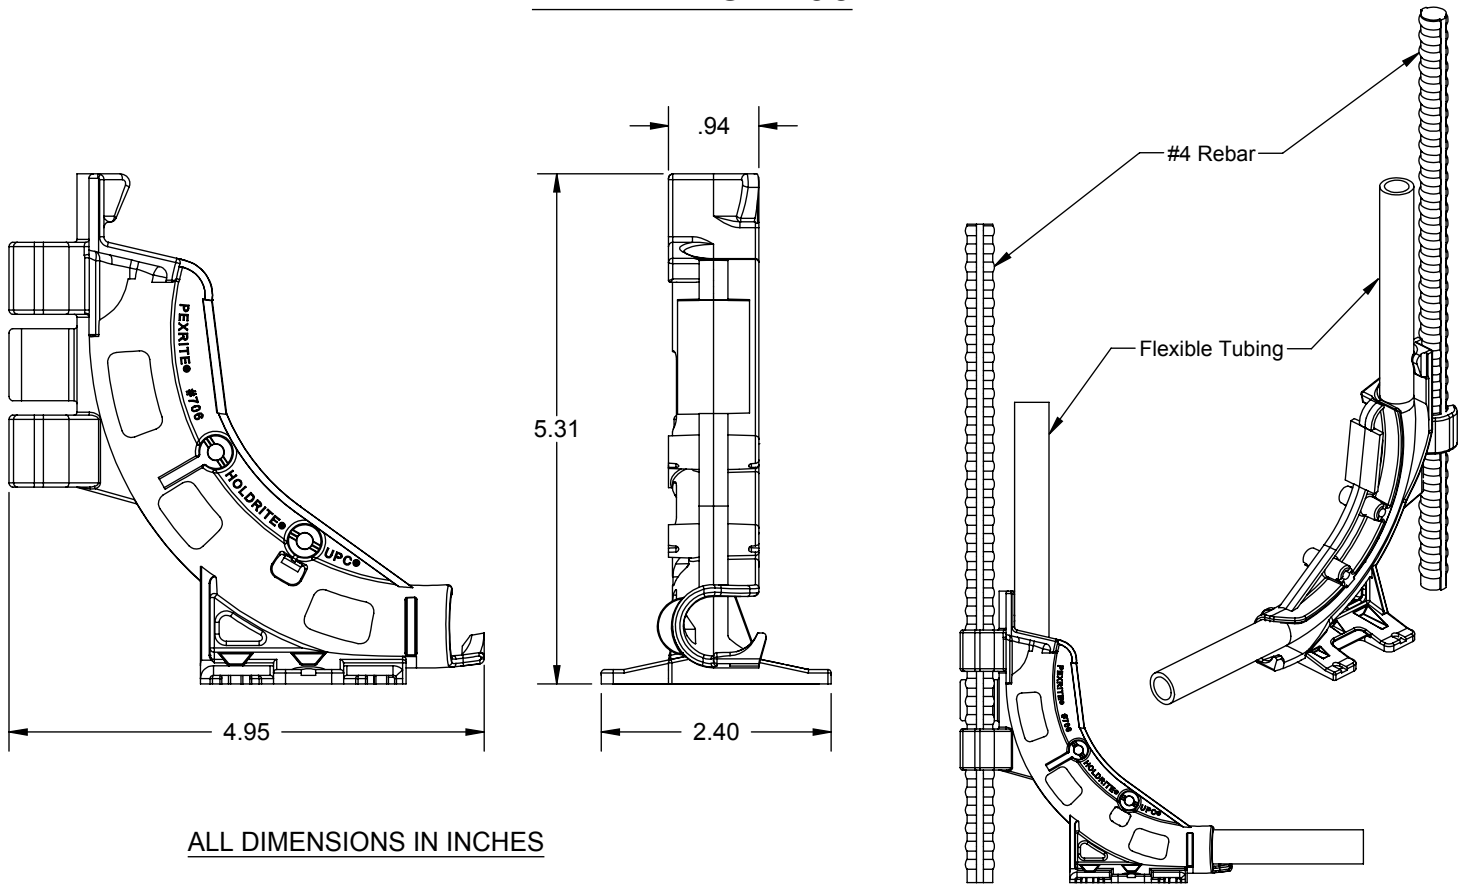

ALL DIMENSIONS IN INCHES

The PEXRITE® #706 supports one 3/8" - 5/8" O.D. flexible tubing line (PEX or soft copper). Ideal for positioning tubing at 90° prior to concrete slab pouring. For slab-on-grade (ground work), secure bracket with #4 rebar driven into the ground.

Product Information:

- Material: Polypropylene, 30% Glass Filled
- Temperature range: -10°F to +190°F
- Load rating: 25 pounds
- Patent Pending

THIS INFORMATION IS PROPRIETARY TO HOLDRITE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION.

HOLDRITE®

CONVERTING MAKESHIFT METHODS INTO ENGINEERED SOLUTIONSSM
 800-321-0316 OR 760-744-6944 / FAX: 760-744-0507 / WWW.HOLDRITE.COM
 spec_706_RevC

Product Submittal	
Job Name:	
Date:	
Part Number:	Qty:
Architect / Owner:	
Contractor:	
Notes:	