
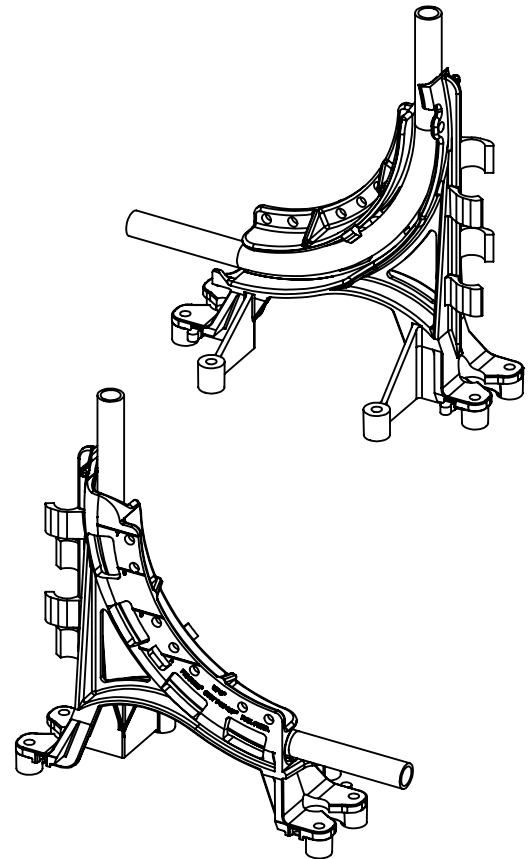


PRODUCT SPECIFICATION DRAWING

PEXRITE® #707 POP-UP™

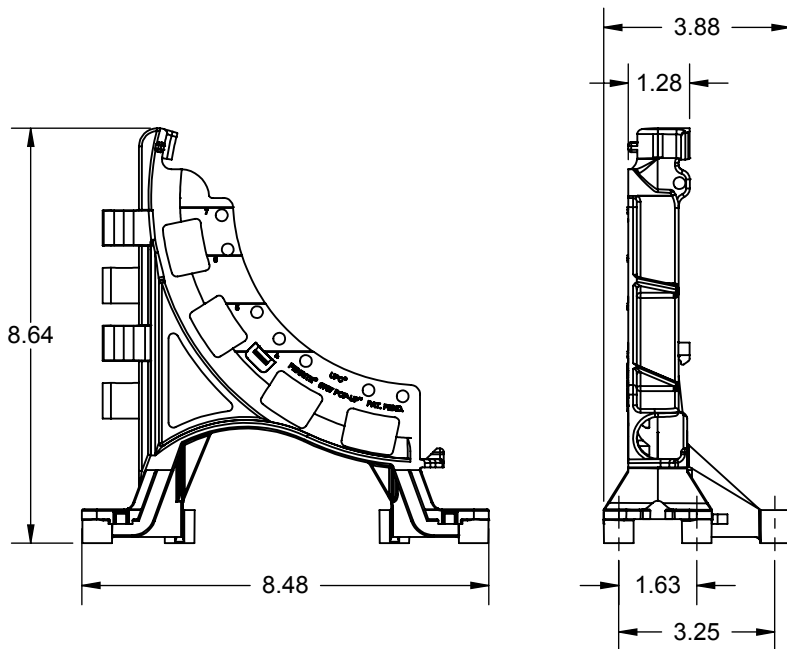

ALL DIMENSIONS IN INCHES

The PEXRITE® #707 POP-UP™ supports one 3/8" - 7/8" O.D. flexible tubing line (PEX or softer copper). Ideal for positioning tubing prior to concrete slab pouring. For elevated slabs, nail bracket to form decking or edge form. For slab-on-grade (ground work), secure bracket with #4 rebar driven into the ground.

Product Information:

- Material: Reinforced Polypropylene
- Temperature range "post install": -10°F to +190°F
- Load rating: 25 pounds
- Patent Pending
- UPC / IPC / IAPMO listed



THIS INFORMATION IS PROPRIETARY TO HOLDRITE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION.



CONVERTING MAKESHIFT METHODS INTO ENGINEERED SOLUTIONSSM
 800-321-0316 OR 760-744-6944 / FAX: 760-744-0507 / WWW.HOLDRITE.COM
 spec_707_RevG

Product Submittal	
Job Name:	
Date:	
Part Number:	Qty:
Architect / Owner:	
Contractor:	
Notes:	