



SUPERVENT® TOP AIR VENT

Reduce noise and improve performance in hydronic heating and cooling systems with the SuperVent® Top Air Vent.

Used with SuperVent® PV Series products, the Top Air Vent offers a high venting capacity that reduces and often eliminates the need for bleeding. That makes the SuperVent® Top a great choice for hard-to-reach areas. And when maintenance is needed, the built-in check valve makes it easy because you don't need to drain the system.



SUPERVENT® TOP AIR VENT

Leak-Resistant, Long-Term Performance.

DEBRIS BAFFLE

To control dirt fouling and prevent failure.

HIGH TEMPERATURE THERMOPLASTIC FLOAT

Controls venting rate under continuous operation.

SERVICE CHECK VALVE

NPT connection for easy maintenance without draining the system.


NO-CLOG VENT

For peace of mind, no leaking — includes shut off cap.


BRASS BODY

Durable construction with no ferrous materials.

MODEL	SIZE	CONNECTION TYPE
SV173/U	3/8"	NPT with check valve
SV175/U	1/2"	NPT with check valve

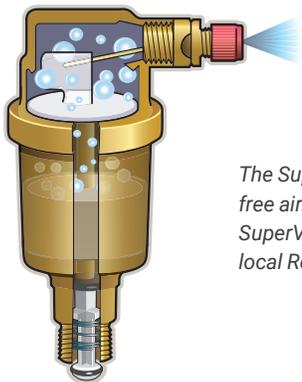

The SuperVent® Top will only remove free air. For more information on the SuperVent® Air Eliminator, contact your local Resideo representative.

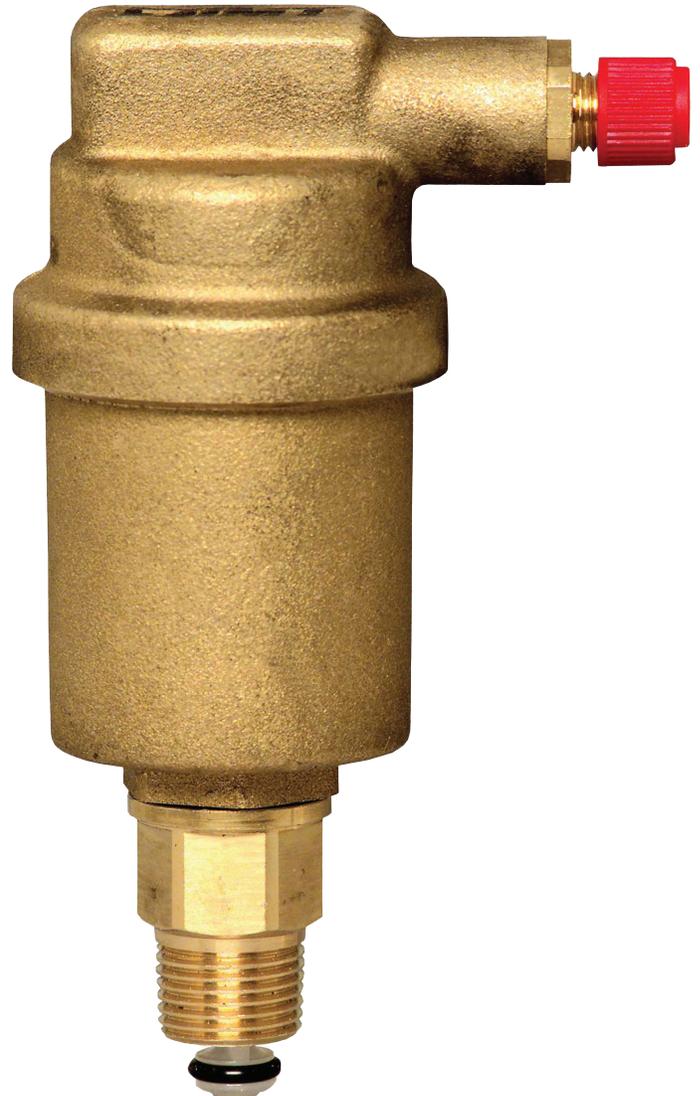

Resideo Technologies, Inc.

1985 Douglas Drive North
Golden Valley, MN 55422
1-800-468-1502
resideo.com

For more information

resideo.com/pro/water