



The new degree of comfort.®



Residential Gas
Professional *Prestige*
Maximus Water Heaters

Professional *Prestige*® Maximus Gas Water Heater offers maximum efficiency & continuous flow

Efficiency

- Up to .90 UEF reduces operating cost
- ENERGY STAR® rated

Performance

- Up to 3.8 GPM continuous flow of hot water at setpoint temperature
- Highest Delivery of 192 gallons in MaxMode™

Easy Installation

- Built-in Condensate Neutralizer
- Certified for multiple termination configurations
- Easy front access to connections and components
- Zero clearance on sides and back
- Longest vent runs, installs as PV or PDV with same unit
- 8" Centers on top water connections for easy replacement of standard gas water heaters
- 1/2" NPT gas connection
- 3/4" NPT water inlet and outlet; 3/4" condensate drain connections
- Plugged side taps
- Temperature and pressure relief valve installed

Integration

- LCD Display with built-in water leak sensor and system health alert with audible alarm
- Integrated EcoNet® Wi-Fi-connected¹ technology and free mobile app gives users control over water systems, allowing for customizable temperature, vacation settings, energy savings and system monitoring at home or away. Visit Rheem.com/maximus

- LeakSense™ Built-in Leak Detection System detects any leak large or small, internal or external²
- Optional auto water shut-off valve accessory limits leaks to no more than 20 ounces of water³

Operation Modes

- MaxMode™ for up to 15% more hot water on demand
- Vacation/Away mode for energy savings during non-use time

High Altitude Compliant

- Certified to 10,100 ft. above sea level

Plus...

- Dual anode rods extend tank life
- Enhanced flow brass drain valve for faster draining
- Advanced Controls and Start-up Verification for better diagnostics, faster installation and easier servicing

Warranty

- 12-Year limited tank and parts warranty
See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.



Professional *Prestige* Maximus

40 and 50-Gallon Capacities
Up to 100,000 BTU/h
Natural and LP Gas
Ultra Low NOx



LEED Points = 2



For more information, please visit

Rheem.com/maximus

¹Wi-Fi broadband internet connection required. ²Water leaks from the heater only, as tested across scenarios including a minimum of 5.5mL/hr volume leak rate, using most common installation scenarios. ³Source: Rheem Leak-Sensing Data; testing under a vacuum lock using 50-gallon tank, no expansion tank, average tank pressure of 40 psi, assuming no additional faucets are opened. Accessory sold separately. Contact your contractor or distributor for more details.

See specifications chart on next page.




INTEGRATED HOME COMFORT

Professional *Prestige*[®] Maximus Specifications

DESCRIPTION				FEATURES								ROUGHING IN DIMENSIONS (SHOWN IN INCHES)														ENERGY INFO.
T Y P E	NOMINAL GALLON CAP.	RATED GALLON CAP.	MODEL NUMBER	GAS INPUT IN THOUS. BTU/H		RECOVERY IN G.P.H. 90° F RISE		FIRST HR. RATING (GALLONS)		MAXMODE™ DELIVERY (GALLONS)		HEIGHT TO INTAKE A	OVERALL UNIT HEIGHT B	DIAM. C	HT. TO GAS CONN. D	VENT SIZE E	WATER CONN. CENTER F	HT. TO SIDE TAP HOT G	HT. TO SIDE TAP COLD H	HT. TO EXHAUST J	WATER CONN. SIZE	SHIP WT. (LBS)	UNIFORM ENERGY FACTOR (UEF)			
				NAT.	LP	NAT.	LP	NAT.	LP	NAT.	LP															
Tall	40	40	PROP G40-50U RH HE EC3	50	–	64	–	88	–	101	–	54-1/4	54-1/2	21-3/4	50-1/4	2", 3", 4", 2" or 3" Flex	8	38	12	10	3/4	221	0.90			
Tall	40	40	PROP G40-50P RH HE EC3	–	50	–	64	–	88	–	101	54-1/4	54-1/2	21-3/4	50-1/4	2", 3", 4", 2" or 3" Flex	8	38	12	10	3/4	221	0.90			
Tall	50	50	PROP G50-50U RH HE EC3	50	–	64	–	95	–	109	–	64-1/4	65-1/2	21-3/4	61	2", 3", 4", 2" or 3" Flex	8	48	12	10	3/4	247	0.88			
Tall	50	50	PROP G50-50P RH HE EC3	–	50	–	64	–	95	–	109	64-1/4	65-1/2	21-3/4	61	2", 3", 4", 2" or 3" Flex	8	48	12	10	3/4	247	0.88			
Tall	50	50	PROP G50-76U RH HE EC3	76	–	97	–	136	–	156	–	64-1/4	65-1/2	21-3/4	61	2", 3", 4", 2" or 3" Flex	8	48	12	10	3/4	256	0.89			
Tall	50	50	PROP G50-76P RH HE EC3	–	76	–	97	–	136	–	156	64-1/4	65-1/2	21-3/4	61	2", 3", 4", 2" or 3" Flex	8	48	12	10	3/4	256	0.89			
Tall	50	50	PROP G50-100U RH HE EC3	100	–	128	–	167	–	192	–	64-1/4	65-1/2	21-3/4	61	2", 3", 4", 2" or 3" Flex	8	48	12	10	3/4	256	0.89			
Tall	50	50	PROP G50-100P RH HE EC3	–	100	–	128	–	167	–	192	64-1/4	65-1/2	21-3/4	61	2", 3", 4", 2" or 3" Flex	8	48	12	10	3/4	256	0.89			

Uniform Energy Factor and rated gallon capacity based on Department of Energy (DOE) requirements.
All units have integrated Wi-Fi control board.

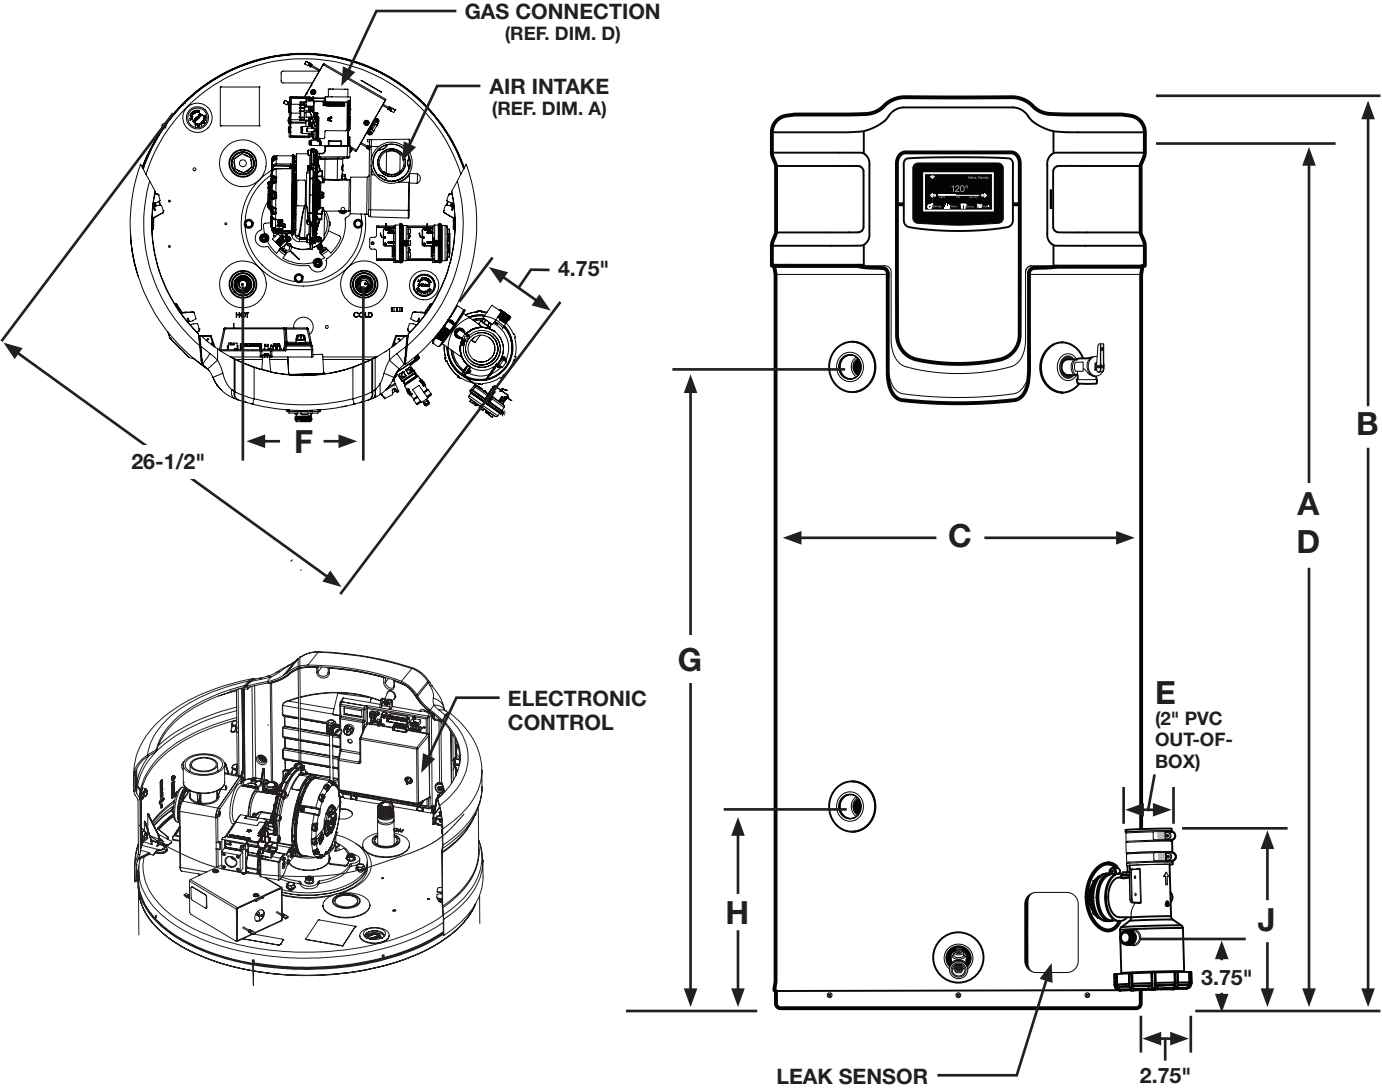

RESIDENTIAL EQUIVALENT VENT LENGTHS

40G-50K AND 50G-50K; POWER VENT CONFIGURATION; (RIGID PIPE)				40G-50K AND 50G-50K; POWER DIRECT VENT CONFIGURATION; (RIGID PIPE)					
ELEVATION (FEET)	VENT SIZE (INCHES)	NAT MAX EQ. LENGTH (FEET)	LP MAX EQ. LENGTH (FEET)**	NAT MAX EQ. LENGTH (FEET)		LP MAX EQ. LENGTH (FEET)**		TERMINATIONS	
				INTAKE	EXHAUST	INTAKE	EXHAUST		
0-2000	2"	50'	50'	50'	50'	50'	50'	2" AND 3" 90° ELBOWS, 2", 3" AND 4" CONCENTRIC AND 2"AND 3" PANCAKE	
	3"	140'	140'	140'	140'	140'	140'		
	4"	140'	140'	140'	140'	140'	140'		
2000-5400	2"	50'	Not Applicable	50'	50'	40'	40'		
	3"	140'	Not Applicable	140'	140'	110'	110'		
	4"	140'	Not Applicable	140'	140'	110'	110'		
5400-7800	2"	50'	Not Applicable	50'	50'	10'	20'		
	3"	140'	Not Applicable	140'	140'	110'	110'		
	4"	140'	Not Applicable	140'	140'	110'	110'		
7800-10,100	2"	50'	Not Applicable	50'	50'	Not Applicable	Not Applicable		
	3"	140'	Not Applicable	140'	140'	Not Applicable	Not Applicable		
	4"	140'	Not Applicable	140'	140'	Not Applicable	Not Applicable		
MINIMUM INTAKE AIR AND EXHAUST VENT: 10' EQUIVALENT LENGTH									
NATURAL GAS MODELS CAN BE INSTALLED IN HIGH ALTITUDE LOCATIONS WITH DISPLAY CONTROL SETTING CHANGES AS SHOWN IN HIGH ALTITUDE SECTION OF MANUAL.									

50G-76K, 50G-100K; POWER VENT CONFIGURATION; (RIGID PIPE)				50G-76K, 50G-100K; POWER DIRECT VENT CONFIGURATION; (RIGID PIPE)				
ELEVATION (FEET)	VENT SIZE (INCHES)	NAT MAX EQ. LENGTH (FEET)	LP MAX EQ. LENGTH (FEET)	NAT MAX EQ. LENGTH (FEET)		LP MAX EQ. LENGTH (FEET)		TERMINATIONS
				INTAKE	EXHAUST	INTAKE	EXHAUST	
0-10,100	2"	40'	40'	40'	40'	40'	40'	2" AND 3" 90° ELBOWS, 2", 3" AND 4" CONCENTRIC AND 2"AND 3" PANCAKE
	3"	140'	140'	140'	140'	140'	140'	
	4"	140'	140'	140'	140'	140'	140'	
MINIMUM INTAKE AIR AND EXHAUST VENT: 10' EQUIVALENT LENGTH								

Note: Vent pipe size should not be mixed for venting these water heater. Use same diameter pipe for all venting of the unit.

All power direct models can use 2" concentric venting only as listed in the above chart.

2" Concentric vent can only be used with 2" rigid piping.

DO NOT mismatch concentric vent terminations with different rigid piping as it may cause the heater to malfunction or cause a lock-out condition unless specifically mentioned.

3" Concentric vent may be used with 3" and 4" venting.

FLEXIBLE POLYPROPYLENE PIPE (FT)				
PIPE SIZE (IN.)	2"		3"	
	INTAKE	EXHAUST	INTAKE	EXHAUST
MAX PV	0	30'	0	30'

VENTING – ELBOW EQUIVALENT VENT LENGTH					
90°			45°		
SHORT SWEEP	STANDARD	LONG SWEEP	SHORT SWEEP	STANDARD	LONG SWEEP
DO NOT USE	7'	5'	DO NOT USE	4.5'	2.5'

• Each 45 degree elbow reduced the equivalent length by 2-1/2 ft.



The new degree of comfort®



Residential Gas
Professional *Prestige*
Maximus Water Heaters

Altitude Guide by Model


MODEL	0-2000 FEET	2000-5400 FEET	5400-7800 FEET	7800-10,100 FEET
40G / 50K BTU NG	No Changes Needed – Good Out The Box	Change to High Altitude Mode in User Interface		
40G / 50K BTU LP	No Changes Needed – Good Out The Box	N/A		
50G / 50K BTU NG	No Changes Needed – Good Out The Box	Change to High Altitude Mode in User Interface		
50G / 50K BTU LP	No Changes Needed – Good Out The Box	N/A		
50G / 76K BTU NG	No Changes Needed – Good Out The Box			
50G / 76K BTU LP				
50G / 100K BTU NG	No Changes Needed – Good Out The Box			
50G / 100K BTU LP				

Maximus Accessories


PART NO.	DESCRIPTION
SP20897	2" CONCENTRIC TERMINATION
SP20245	3" CONCENTRIC TERMINATION
SP20796	4" CONCENTRIC TERMINATION
SP20285	2" FLAT TERMINATION
SP20286	3" FLAT TERMINATION
SP21091	2" POLYPROPYLENE FLEX PIPE – 30 FEET
AP19356	3" POLYPROPYLENE FLEX PIPE – 30 FEET
SP21172	AUTO SHUTOFF VALVE KIT



Flat Vent Termination (SP20285, SP20286)

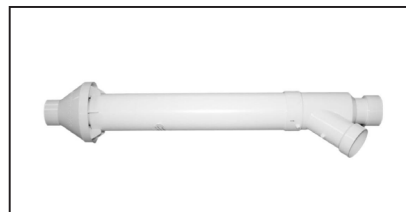

Concentric Vent Termination
(SP20897, SP20245, SP20796)

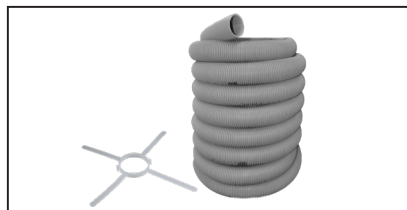

Flex Venting Kit (SP21091, AP19356)



Shutoff Valve (SP21172)

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 1115 Northmeadow Parkway, Suite 100
Roswell, Georgia 30076 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario L6Y 0P5 • www.rheem.com



INTEGRATED HOME COMFORT