The new degree of comfort."

The energy efficient Professional *Classic Plus*® Powered Damper gas water heaters

Efficiency

• .65 - .69 UEF

Performance

- FHR: 66 84 gallons
- Recovery: Up 50.5 GPH at a 90° F rise, depending on model

Self-Diagnostic System


 Electronic gas control for improved monitoring and service

Low Emissions

- Eco-friendly burner, low NOx design
- Meets 40 ng/J NOx requirements

Technology

• 24 VAC flue damper, 110 VAC outlet required



• Standard Cat. I, double-wall, B-vent, 3" (4" adaptor included)

What is a Powered Damper?

The 24-volt powered flue damper is positioned atop the unit. It opens and closes automatically in response to gas-burner activity. When the combustion stops, it signals the damper to close, trapping the heat inside the flue and delivering more heat to the water.

Guardian System[™] & Sensor

- Exclusive air/fuel shut-off device
- Maintenance free no filter to clean
- Disables the heater in the presence of flammable vapor accumulation





200

Longer Life

 Premium grade anode rod provides long-lasting tank protection

High Altitude Compliant

 Certified to 10,100 ft. above sea level (50-gallon 50K BTU/h model certified to 5,999 feet above sea level)

Plus...

- Dual certified for both potable water and space heating
- Enhanced flow brass drain valve
- Temperature and pressure relief valve included
- Low lead compliant
- Standard replacement parts

Warranty

- 8-Year limited tank and parts warranty*
- With ProtectionPlus[™] the 8-year limited tank warranty becomes 12-year
- *See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.



Professional *Classic Plus*Powered Damper

38, 40 and 50-Gallon Capacities
Up to 50,000 BTU/h
Natural and LP Gas








See specifications chart on back.

₩ Water

Professional Classic Plus® Powered Damper Specifications

		FEATURES						ROUGHING IN DIMENSIONS (SHOWN IN INCHES)									ENERGY INFO.		
T Y P	NOMINAL GALLON	RATED GALLON	MODEL	GAS INPUT IN THOUS. BTU/H		RECOVERY IN G.P.H. 90° F RISE		FIRST HOUR RATING (GALLONS)		HEIGHT TO VENT	TANK HEIGHT	DIAM.	HT. TO GAS CONN.	VENT SIZE	WATER CONN. CENTER	HT. TO SIDE T&P VALVE	WATER CONN. SIZE	SHIP WT.	UNIFORM ENERGY FACTOR
E	CAPACITY	CAPACITY	NUMBER	NAT.	LP	NAT.	LP	NAT.	LP	A	В	С	D	E	F	G	Н	(LBS)	(UEF)
Tall	38	37	PRO+G38-40N RH69 PD	40	-	40.4	-	66	-	62-3/4	57-3/4	19-3/4	14	3 or 4	8	52-1/4	3/4	140	0.68
Tall	38	37	PRO+G38-36P RH69 PD	-	36	-	36.4	-	66	62-3/4	57-3/4	19-3/4	14	3 or 4	8	52-1/4	3/4	140	0.68
Tall	50	48	PRO+G50-40N RH67 PD	40	-	40.4	-	79	-	63	58	21-3/4	14	3 or 4	8	52-1/2	3/4	160	0.69
Tall	50	48	PRO+G50-36P RH67 PD	-	36	-	36.4	-	79	63	58	21-3/4	14	3 or 4	8	52-1/2	3/4	160	0.69
Tall	50	48	PRO+G50-50N RH67 PD	50	-	50.5	-	84	-	63-1/2	58	21-3/4	14	4	8	52-1/2	3/4	160	0.69
Short	40	39	PRO+G40S-40N RH67 PD	40	-	40.4	-	69	-	55-1/2	50-1/2	21-3/4	14	3 or 4	8	44	3/4	140	0.65
Short	40	39	PRO+G40S-36P RH67 PD	-	36	-	36.4	-	69	55-1/2	50-1/2	21-3/4	14	3 or 4	8	44	3/4	140	0.65
Short	50	48	PRO+G50S-40N RH67 PD	40	-	40.4	-	78	-	55-1/2	50-1/2	23-3/4	14	3 or 4	8	44	3/4	160	0.69
Short	50	48	PRO+G50S-36P RH67 PD	_	36	-	36.4	-	78	55-1/2	50-1/2	23-3/4	14	3 or 4	8	44	3/4	160	0.69

Uniform Energy Factor and rated gallon capacity based on Department of Energy (DOE) requirements.

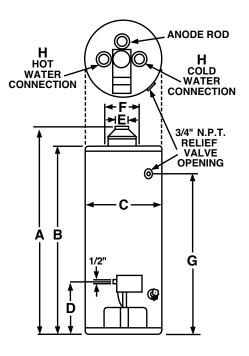

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

INTEGRATED HOME COMFORT