

HardHat™

Heavy-Duty DWV Test Cap



Tough

Thicker wall section. Deep socket for better glue joint

Holds higher test pressures than most test caps

Heavy Duty

1½" and 2" models hold up to 40PSI test*

3" and 4" models hold up to 25PSI test*



Supply

Drainage

Support

Specialties

www.siouxchief.com



TAKE THE FIELD.



Specs

Size	Diameter	Max Test Pressure*
1½"	2⅛"	40 PSI
2"	2⅝"	40 PSI
3"	3¾"	25 PSI
4"	4¾"	25 PSI

Be sure to cut pipe as squarely as possible. Install with appropriate primer/cleaner and solvent cement per manufacturer's instructions. Allow specified amount of time for cement to cure before pressure test.

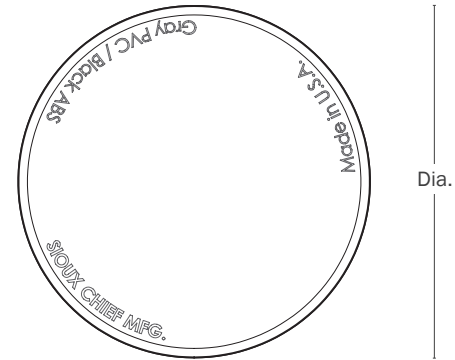

Buying Information

ITEM NO.	DESCRIPTION	PKG.	MIN. QTY.	CASE QTY.
PVC TEST CAPS				
880-01P	1½" HardHat™ test cap for PVC Sch. 40 pipe	B	50	500
880-01PPK	1½" HardHat™ test cap for PVC Sch. 40 pipe	BI	12	12
880-02P	2" HardHat™ test cap for PVC Sch. 40 pipe	B	25	500
880-02PPK	2" HardHat™ test cap for PVC Sch. 40 pipe	BI	12	12
880-03P	3" HardHat™ test cap for PVC Sch. 40 pipe	B	25	250
880-03PPK	3" HardHat™ test cap for PVC Sch. 40 pipe	BI	12	12
880-04P	4" HardHat™ test cap for PVC Sch. 40 pipe	B	25	100
880-04PPK	4" HardHat™ test cap for PVC Sch. 40 pipe	BI	12	12
ABS TEST CAPS				
880-01A	1½" HardHat™ test cap for ABS Sch. 40 pipe	B	50	500
880-02A	2" HardHat™ test cap for ABS Sch. 40 pipe	B	25	500
880-03A	3" HardHat™ test cap for ABS Sch. 40 pipe	B	25	250
880-04A	4" HardHat™ test cap for ABS Sch. 40 pipe	B	25	100

* Not a recommendation - DWV pipe is not designed/intended for high-pressures

PACKAGING:

B = Bulk
C = Cut Case
I = Individually Bar-Coded