

CLOSET FLANGE

» 886 SERIES

TKO™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief 886 series TKO closet flanges shall be used where necessary in drainage systems. Flange shall have a full-swivel, corrosion-proof stainless steel ring, with sufficient holes for securing to floor and slots for inserting closet bolts. Flange shall have a knockout, sized larger than the opening, which comes out in one piece preventing it from falling down the drain line. Flange shall have a 3" Sch. 40 spigot connection which conforms to ASTM D2665 (PVC) or D2661 (ABS). Flange shall hold a standard head test and be UPC listed. Always fasten closet flanges to the floor.

MATERIALS

Flange body: PVC, ABS


Flange ring: 18 gauge 430 stainless steel

DIMENSIONS

A: connection	3" Sch. 40 spigot
B: ring diameter	7"
C: screw hole centers	6"
D: knockout diameter	3"
E: overall height	2"
F: tailpiece length	1½"



886-PTMS

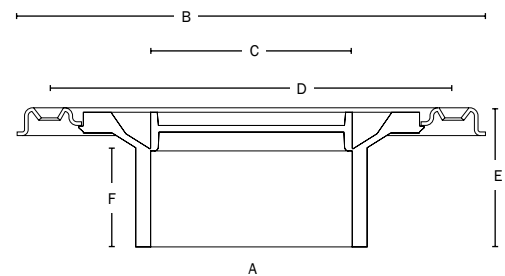

Create Item Number

886-A

e.g. **886-PTMS:** 3" PVC spigot closet flange with TKO knockout

CONNECTION TYPE A

ATMS = ABS Sch. 40 spigot

PTMS = PVC Sch. 40 spigot