

CLOSET FLANGE

» 889 SERIES

DropKick™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief 889 series DropKick closet flanges shall be used where necessary in drainage systems. Flange outlet shall be offset 45° from inlet, and have a full-swivel, corrosion-proof stainless steel ring, with sufficient holes for securing to floor and slots for inserting closet bolts. Flange shall have an angled inner diameter area properly sized to allow full 3" spherical-flow for complete drainage and clog resistance. Flange shall have a 3" Sch. 40 spigot connection which conforms to ASTM D2665 (PVC) or D2661 (ABS). Closet flange shall be UPC listed. Always fasten closet flanges to the floor.

MATERIALS

Flange body: PVC, ABS


Flange ring: 18 gauge 430 stainless steel

DIMENSIONS

A: connection	3" Sch. 40 spigot
B: ring diameter	7"
C: screw hole centers	6"
D: opening diameter	4"
E: outlet angle	45°
F: depth to outlet bottom	4 7/8"
G: depth to angle	1"
H: depth to outlet top	2"



889-45PM

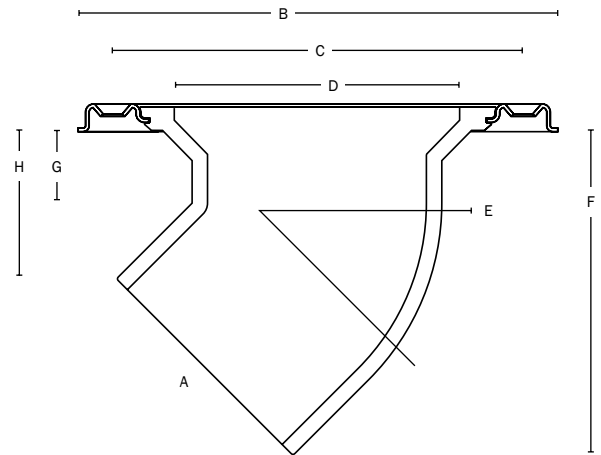

Create Item Number

889-A

e.g. **889-45PM:** 3" PVC spigot closet flange with 45° outlet

CONNECTION TYPE A

45AM = ABS Sch. 40 spigot

45PM = PVC Sch. 40 spigot