

WASHING MACHINE OUTLET BOX

696 SERIES

OxBox™

SPECIFICATION

Sioux Chief 696 series OxBox™ outlet box shall be used where necessary in plumbing systems. Unit shall allow for mounting with supply lines from top or bottom, on-stud or between-studs. Supply and drain boxes can be connected using U-Clip (provided) or separated as desired. Unit shall include plated, ¼-turn valves with 3/4" MHT outlets. Valve outlets shall be provided with tamper-resistant test caps. Valve handles on arrester models can be operated together (single throw) or independently. Metal support bracket can be installed into top/bottom tracks of box. Drain box shall have a testable 5/8" nipple on drain cover. Designed in accordance with IAPMO PS 54-2021a.

MATERIALS

Valve body: Forged brass^{1,2}

Valve shank: Brass^{1,2} or CPVC with 304SS grip ring, brass nut, silicone seal

Box/Frame: ABS

Arrester body: 304SS barrel with brass¹ body

Arrester piston: Polypropylene with EPDM o-rings

Bracket/U-Clip: Galvanized steel

CERTIFICATIONS/APPROVALS

NSF-372 compliant¹, IAPMO listed box and valves,

Arresters meet ASSE 1010, Valves meet ASME A112.18.1

VALVE/ARRESTER WORKING LIMITS



Max Working Temperature: 200° F

Max Testing/Working Pressure: 150 PSIG

DIMENSIONS

A: Frame width	11-1/2"
B: Frame height	7-1/4"
C: Box width	4" (single) or 10" (double with clip)
D: Box height	5-1/2"
E: Box depth	3-1/2"
F: Supply inlet	1/2" Nom. 2" O.C.
G: Supply outlet	3/4" Male hose thread
H: Drain connection	2" Sch. 40 hub
I: Test nipple	5/8" O.D.
J: Knockout	For secondary drainage funnel ³
Bracket length	17"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

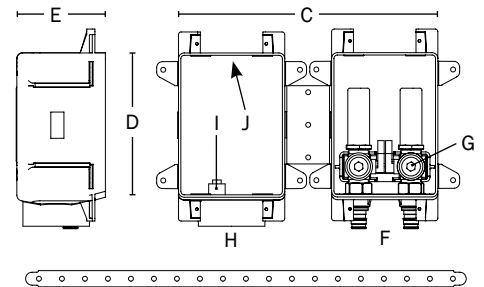

Create Item Number

696-ABCD

e.g. **696-G2313XF:** Washing machine outlet box with frame; no-lead valves with arresters, F1807 connection

VALVE MATERIAL A

- = Standard brass²
- G = No-lead brass¹

ARRESTERS B

- 2303** = No arresters
- 2313** = With arresters

SUPPLY CONNECTION C

- C** = CPVC (male)
- E** = Everloc+
- M** = MIP/FSWT
- P** = MSWT/Press/Push
- V** = F3347 PEX
- W** = F1960 PEX
- X** = F1807 PEX

FRAME OPTION D

- F** = Standard Pack: Supply and drain box, frame, bracket, and debris cover
- R** = Rough-in Pack: Supply and drain box, bracket, and debris cover

Accessories - Available Separately:

- 696-1F: Single-box frame
- 696-2F: Double-box frame
- 696-EX: Frame extension (fits single box)
- 696-CF: Secondary drainage funnel³

¹ C69300 material is DZR and SCC resistant, compliant with NSF-61 & 372, and compliant with California No Lead Plumbing Law
² C37700 and C36000 material | ³ Secondary drainage funnel (696-CF) accepts 1/2", 3/4", or 1" CTS

