

ADJUSTABLE ON-GRADE FLOOR DRAIN

» 832 SERIES

FinishLine™

SPECIFICATION

Sioux Chief 832 series FinishLine adjustable floor drain shall be used where necessary in drainage systems. Floor drain shall allow adjustment before and AFTER the concrete pour. Strainer shall be heel-resistant and meet applicable load requirements for intended use. Trap primer port shall be threaded 1/2" FIP for optional connection. Designed in accordance with ASME A112.6.3.

MATERIALS

Ring/strainer: Nickel-bronze, 304 Stainless steel
Head adapter/Coring sleeve/Base adapter: Ductile iron
Coring plug: high-impact polymer

STRAINER LOAD RATING

Nickel-Bronze: 1,650 lbs. (light duty)
Stainless Steel: 2,000 lbs. (light duty)

STRAINER FREE AREA

Round: 8.5 in²
Square: 12.75 in²


DIMENSIONS

A: Connection size	2", 3" No-Hub
B: Ring/strainer diameter	
Round Square	5-1/2" 5-7/8"
C: Base adapter height	3-3/4"
D: Pre-pour adjustable height	4-5/8" – 5-3/4"
E: Post-pour adjustable height	
Round Square	0" – 1" 5/16" – 1"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



832-35DSQ

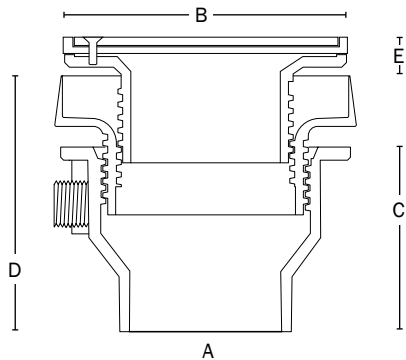

Create Item Number

832-ABC

e.g. **832-35DSQV:** FinishLine floor drain with 3" No-Hub connection vandal-resistant, square stainless steel strainer

CONNECTION SIZE **A**

25D = 2" No-Hub
35D = 3" No-Hub

RING/STRAINER TYPE **B**

NR = Round Nickel-bronze
SR = Round Stainless steel
NQ = Square Nickel-bronze
SQ = Square Stainless steel

OPTIONS **C**

V = Vandal-resistant strainer screws
B = Complies with BABAA¹
E = 1-1/4" Extended strainer rim¹

Accessories - Available Separately:

832-3HHD: Hub drain finish fixture
832-EX3: Iron extension adapter for Std. top²
832-P: Coring Plug wrench
832-S3: Leveling shim kit
832-W: Flexible locating bristles kit
835-2: TrapShield™ for 2" drain outlet
835-3: TrapShield™ for 3" drain outlet
863-FA: Round aluminum condensate funnel
863-FN: Round nik-brz condensate funnel

¹ Available for round nickel-bronze strainers only | ² Extends head 2" (min) to 4" (max) above Coring Sleeve