

## Maris™ Undercounter Lavatory

### FEATURES

- 20-5/16" x 15-9/16" Undercounter lavatory
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- ADA compliant (with overflow to the rear)
- Mounting assembly complete with installation template and mounting screw set for wood countertops
- THU410 is required for marble/granite type counter top installation and must be purchased separately



### MODELS

- LT481G - with CEFIONTECT (#01, #03, #11, #12)
- LT481 - without CEFIONTECT (#51)



### PRODUCT SPECIFICATION

The undercounter lavatory shall be made of vitreous china. Lavatory shall be 20-5/16" in length and 15-9/16" in width. Product shall be with overflow and lavatory shall include mounting assembly. Lavatory shall be TOTO Model LT481\_\_\_\_\_.

### COLORS/FINISHES

- #01 Cotton
- #03 Bone
- #11 Colonial White
- #12 Sedona Beige
- #51 Ebony

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Meets ADA guidelines and ANSI A117.1 requirements when countertop is installed 864mm (34") from finished floor and lavatory is installed 51mm (2") minimum from front edge.
- Complies with CA Prop 65 warning requirements



# LT481(G)


## Maris™ Undercounter Lavatory

### SPECIFICATIONS

- Waste 1-1/4" O.D.
- Size 22-5/8"W x 17-7/8"D
- Basin 20-5/16"W x 15-9/16"D
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight 22lbs.
- Shipping Dimensions 25"W X 19-1/4"D X 10-1/2"H

### INSTALLATION NOTES

#### Mounting Hardware

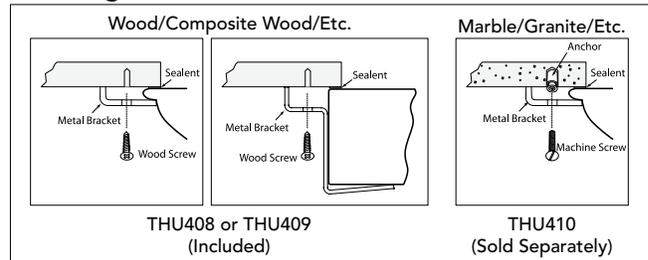



Install this product according to the installation guide.

Supplied basin clamp assemblies require 3/4" (19 mm) minimum countertop thickness. Installer must supply anchors for thinner countertops.


NOTICE: Countertop manufacturer or cutter must use the current product template available at [www.totousa.com](http://www.totousa.com). TOTO USA Inc. is not responsible for cutout errors when the incorrect cut-out template is used.

Will comply with ADA when installed per Section 606 Lavatories of the ADA 2010 Accessible Design Standard to meet barrier free clearance with maximum rim height of 34".

Will comply with CSA B651 when installed per Clause 6.2.3 Lavatories of the CSA 2012 Accessible Design Standard to meet barrier free clearance with maximum rim height of 34".

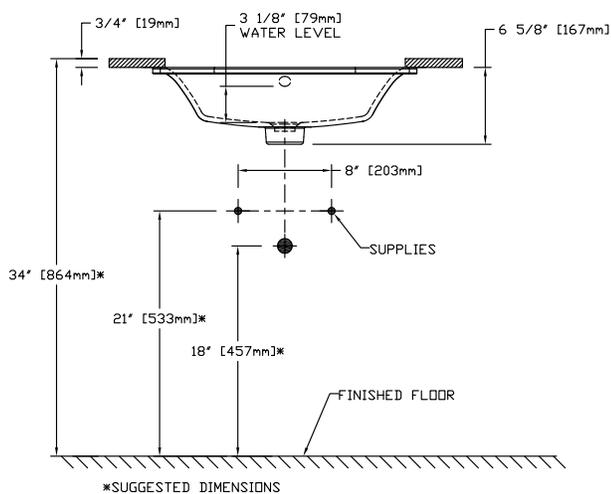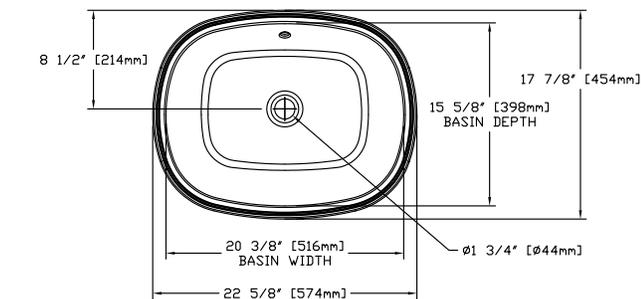

#### ADA COMPLIANCE CHECK NOTE: OVERFLOW MUST BE AT REAR

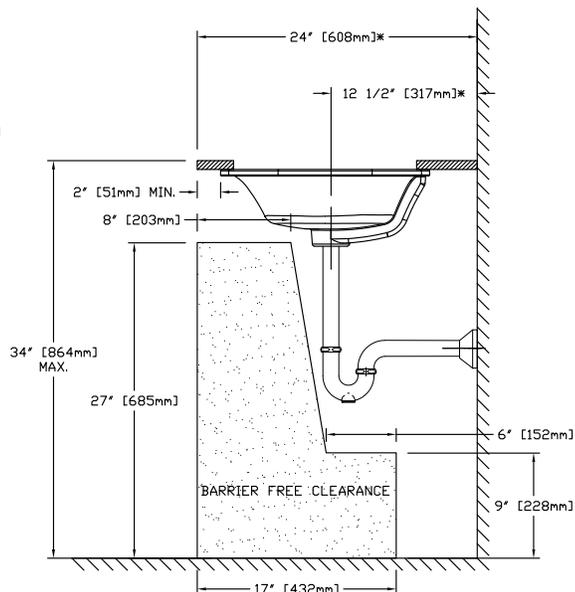

These dimensions and specifications are subject to change without notice