

## Drake® WASHLET®+ S7 Two-Piece Toilet - 1.6 GPF, 10" Rough-In

### FEATURES

- Concealed supply connection for seamless installation
- TORNADO FLUSH® system - 1.6 GPF (6.0 LPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Universal Height
- Chrome plated trip lever
- 10" Rough-in
- Elongated front bowl and WASHLET+ S7 and tank set
- EWATER+® auto-cleans wand and bowl after every use
- PREMIST® automatically mists the bowl before each use
- Multifunction pearl white block-style remote control
- Night light
- Auto flush available as upgrade

### MODELS

- **MW7764726CSFGA.10 (#01)**  
With CEFIONTECT ceramic glaze, WASHLET+ S7 with contemporary design and Auto Flush
  - **C776CEFGT40.10**  
Elongated bowl with CEFIONTECT
  - **ST776SA**  
Tank and cover only
  - **SW4726AT40**  
WASHLET+ S7
  - **THU857**  
Auto Flush Kit
- **MW7764726CSFG.10 (#01)**  
Same as MW7764726CSFGA.10 without Auto Flush

### OPTIONAL COMPONENTS

- **THU808(#01, #03, #11, #12, #51, #BN, #PN, #RB)-A**  
Trip Lever (Cotton, Bone, Colonial White, Sedona Beige, Ebony, Brushed Nickel, Polished Nickel, Oil Rubbed Bronze)

### COLORS/FINISHES

- #01 Cotton



-  **TORNADO FLUSH**
-  **EWATER+**
-  **CEFIONTECT**
-  **Auto Flush**
-  **UNIVERSAL HEIGHT**

### PRODUCT SPECIFICATION

The two-piece TORNADO FLUSH toilet shall be 1.6 GPF (6.0 LPF). Universal Height Toilet with CEFIONTECT glaze finish. Toilet shall be 10" rough-in, elongated front bowl and chrome trip lever. Toilet shall be TOTO Model MW7764726CSFG\_\_\_\_.10#01. **See SW4726AT40 Specification Sheet for details on included WASHLET.**

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO (cUPC®)
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant for residential use with autoflush feature model, or with trip lever located on the approach side
- Complies with CA Prop 65 warning requirements



# MW7764726CSFG(A).10

## Drake® WASHLET®+ S7 Two-Piece Toilet - 1.6 GPF, 10" Rough-In


### SPECIFICATIONS

<b>Water Use</b>	1.6 GPF (6.0 LPF)
<b>Flush System</b>	TORNADO FLUSH®
<b>Min. Water Pressure</b>	8 psi (flowing)
<b>Water Surface</b>	9" x 6-7/8"
<b>Trap Diameter</b>	2-1/8"
<b>Rough-in</b>	10"
<b>Trap Seal</b>	2-1/8"
<b>Warranty</b>	One Year Limited Warranty
<b>Material</b>	Vitreous China
<b>Shipping Weight</b>	C776CEFGT40.10: 62 lbs ST776SA: 32 lbs SW4726AT40: 14.5 lbs
<b>Shipping Dimensions</b>	C776CEFGT40.10 30-1/8" L x 15-1/4" W1 x 10-7/8" W2 x 17-3/4" H ST776SA 18-3/4" L x 8-7/8" W x 16-1/4" H SW4726AT40 23-3/8" L x 17-5/8" W x 6-1/4" H

See SW4726AT40 Specification Sheet for details on included WASHLET.

### INSTALLATION NOTES


Back-to-Back Toilet Installations:  
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

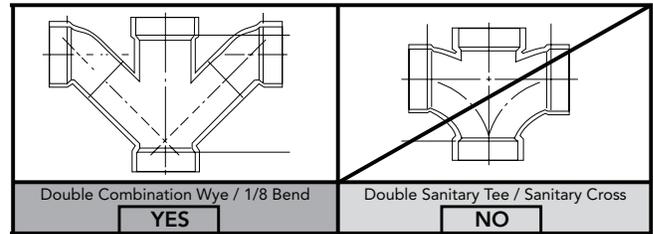

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

### DIMENSIONS

\*\*GFCI outlet of 120V, 15A  
Washlet power cord is 4' long with 3 prongs.

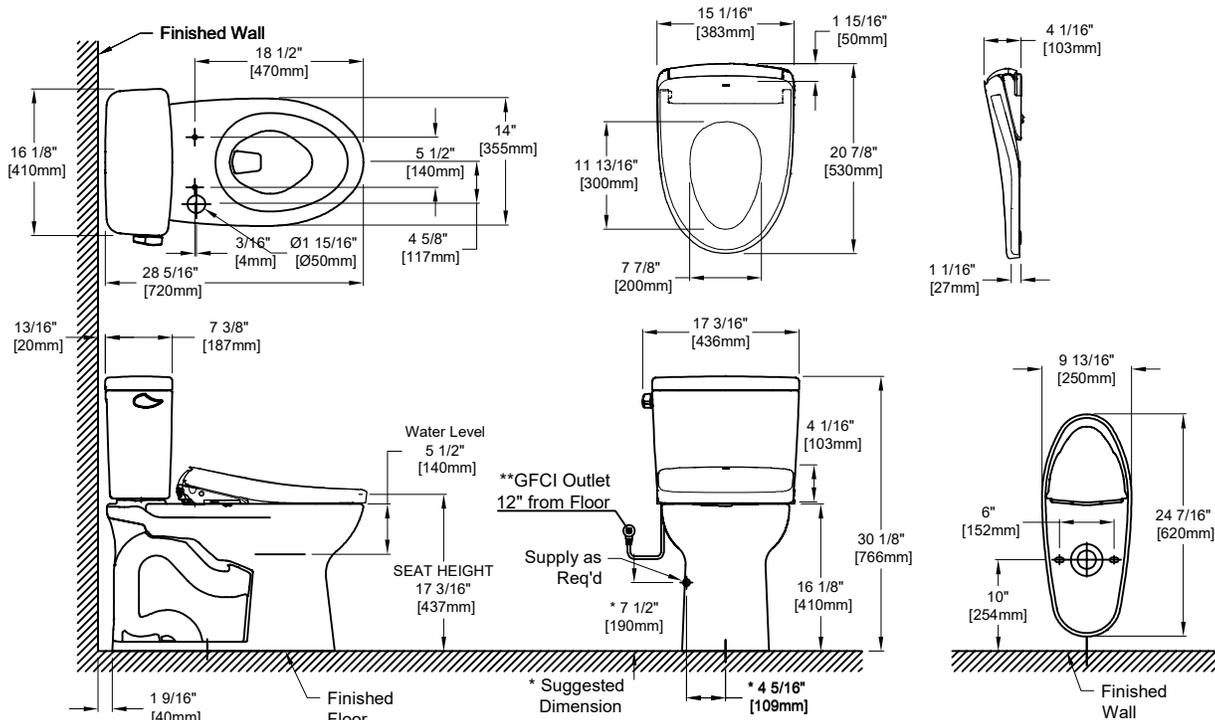

**TOTO®**

These dimensions and specifications are subject to change without notice