

FEATURES

- WaterSense® certified high-efficiency 1.75 gpm (6.6 lpm)
- ø4-5/16" Single spray handshower
- Balanced Comfort Wave™ technology with wide coverage rinse & wash
- Rubber nozzles to prevent limescale build-up
- Meets 2018 California water efficiency appliance CEC regulations
- Shower hose sold separately

COLORS/FINISHES

- #CP Polished Chrome
- #PN Polished Nickel
- #BN Brushed Nickel

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, DoE, CEC and others
- Complies with CA Prop 65 warning requirements



PRODUCT SPECIFICATION

Product shall be TOTO Model TBW02010U4# ____.

Product shall have maximum flow rate of 1.75 gpm (6.6 lpm). Product shall have balanced Comfort Wave technology with wide coverage overlaying rinse & wash. Product shall have rubber nozzles to prevent limescale build-up. Product shall meet 2018 California water efficiency appliance CEC regulations. Product shower hose sold separately.

TBW02010U4


Square Handshower 1 Mode

SPECIFICATIONS


| | |
|----------------------------|---|
| Material | ABS & POM |
| Maximum Flow Rate | 1.75 gpm (6.6 lpm) |
| Warranty | Limited Lifetime for Residential Use One Year for Commercial Use |
| Shipping Weight | 1.1 lbs |
| Shipping Dimensions | 10-3/4" L x 5-1/8" W x 3-3/4" H |

INSTALLATION NOTES

For use with TS101W60: Shower hose (Sold separately)

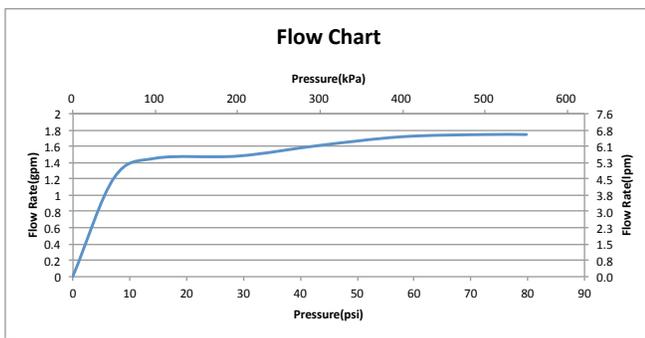

DIMENSIONS

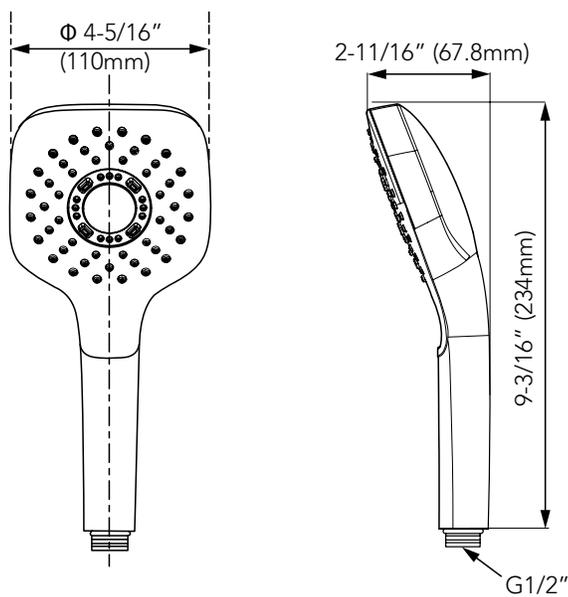

TOTO