

Round Showerhead 2 Mode

FEATURES

- Maximum flow rate of 2.5 gpm (9.5 lpm)
- Balanced overlaying rinse and wash Comfort Wave™ Technology
- Bathing shower Warm Spa™ Technology
- 8.5" (220 mm) diameter spray face
- Rubber nozzles to prevent lime scale build up
- Includes matching escutcheon
- Push button switch to change shower mode effortlessly
- Shower arm sold separately

COMPATIBLE COMPONENT *(Sold Separately)*

TS110MW16: Rain Shower Arm Wall Mount 16"

TS110MC6: Rain Shower Arm Ceiling Mount 6"

COLORS/FINISHES

#CP Polished Chrome

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, DoE, and others
- Complies with CA Prop 65 warning requirements



PRODUCT SPECIFICATION

Product shall be TOTO Model TBW01004U1#____.
Product shall have a maximum flow rate of 2.5 gpm (9.5 lpm). Product shall have a single spray. Product shall have 2 shower modes: Comfort Wave and Warm Spa. Product shall have 8.5" (220 mm) diameter spray face. Product shall have rubber nozzles to prevent lime scale build up. Product shall include matching escutcheon. Product shall have mode-switching push button. Product shower arm sold separately.



Please note the following components are sold separately



TS110MW16: Rain Shower Arm Wall Mount 16"



TS110MC6: Rain Shower Arm Ceiling Mount 6"

TBW01004U1


Round Showerhead 2 Mode

SPECIFICATIONS


Material	ABS & POM
Maximum Flow Rate	2.5 gpm (9.5 lpm)
Warranty	Limited Lifetime for Residential Use One Year for Commercial Use
Shipping Weight	4.5 lbs
Shipping Dimensions	14-1/4"L x 10-3/4"W x 7"H

INSTALLATION NOTES

Use with TS110MW16: Rain Shower Arm Wall Mount 16" or TS110MC6: Rain Shower Arm Ceiling Mount 6" (Sold separately)

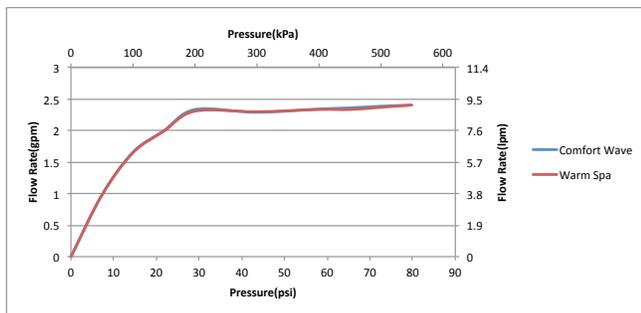

DIMENSIONS

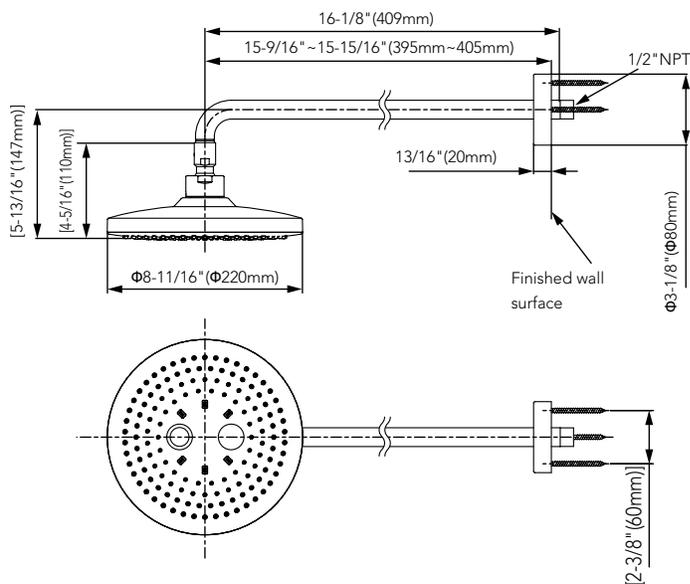

Note: The unit of above dimension is inch (mm); the dimension in [] is for reference only. Shower arm and mounting bracket are not included.

TOTO