

## Connelly® Close Coupled Toilet, 1.28 & 0.9 GPF

### FEATURES

- 3D TORNADO FLUSH® system, high-efficiency dual-flush 1.28 & 0.9 GPF (4.8 & 3.4 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Specially designed to accommodate a WASHLET®+
- Universal Height
- Elongated front bowl and seat
- 12" Rough-in
- Chrome plated trip lever

### MODELS

- **MS494234CEMFG#01**  
With CEFIONTECT ceramic glaze & includes seat SS234
- **MS494234CEMFRG#01**  
Right-hand trip lever With CEFIONTECT ceramic glaze & includes seat SS234

### COMPONENTS

- **CT494CEFGT40**  
Elongated bowl with CEFIONTECT
- **ST494M**  
Tank and cover only
- **ST494MR**  
Right-hand trip lever tank and cover only
- **SS234**  
SoftClose® Seat

#### Optional Components

- **SS124**  
SoftClose Seat
- **9AU321-A**  
WASHLET® adapter  
(Required for WASHLET installation)
- **THU416#01**  
Trip Lever - Cotton
- **THU416#PN**  
Trip Lever - Polished Nickel
- **THU416#BN**  
Trip Lever - Brushed Nickel

### COLORS/FINISHES

- #01 Cotton



 **3D TORNADO FLUSH**  **CEFIONTECT**

 **Universal Height**

### PRODUCT SPECIFICATION

The two-piece high-efficiency 3D TORNADO FLUSH toilet shall be dual-flush 1.28 & 0.9 GPF (4.8 & 3.4 LPF). Toilet shall be 12" rough-in. Toilet shall have CEFIONTECT ceramic glaze and be at Universal Height. Toilet shall have elongated front bowl with SoftClose seat and Polished Chrome trip lever. Toilet shall be TOTO Model MS494234CEMF#01.

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- Complies with CA Prop 65 warning requirements



# MS494234CEMF(R)G


## Connelly® Close Coupled Toilet, 1.28 & 0.9 GPF

### SPECIFICATIONS

<b>Water Use</b>	1.28 & 0.9 GPF (4.8 & 3.4 LPF)
<b>Flush System</b>	3D TORNADO FLUSH®
<b>Min. Water Pressure</b>	8 psi (Flowing)
<b>Water Surface</b>	5-5/8" x 4-1/8"
<b>Trap Diameter</b>	2-1/8"
<b>Rough-in</b>	12"
<b>Trap Seal</b>	2-1/8"
<b>Warranty</b>	One Year Limited Warranty
<b>Material</b>	Vitreous China
<b>Shipping Weight</b>	CT494CEFGT40 70 lbs
	ST494M 31 lbs
<b>Shipping Dimensions</b>	CT494CEFGT40 30-3/4" L x 17-3/8" W x 20-1/2" H
	ST494M 17-1/4" L x 7-7/8" W x 17-1/2" H


### INSTALLATION NOTES

Back-to-Back Toilet Installations:  
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

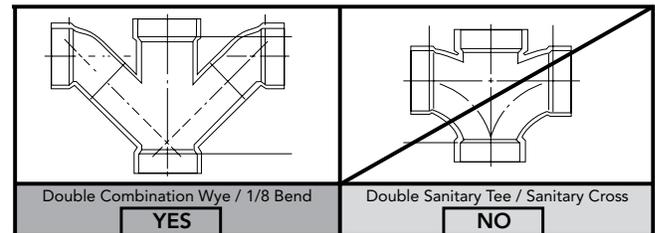

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

### DIMENSIONS

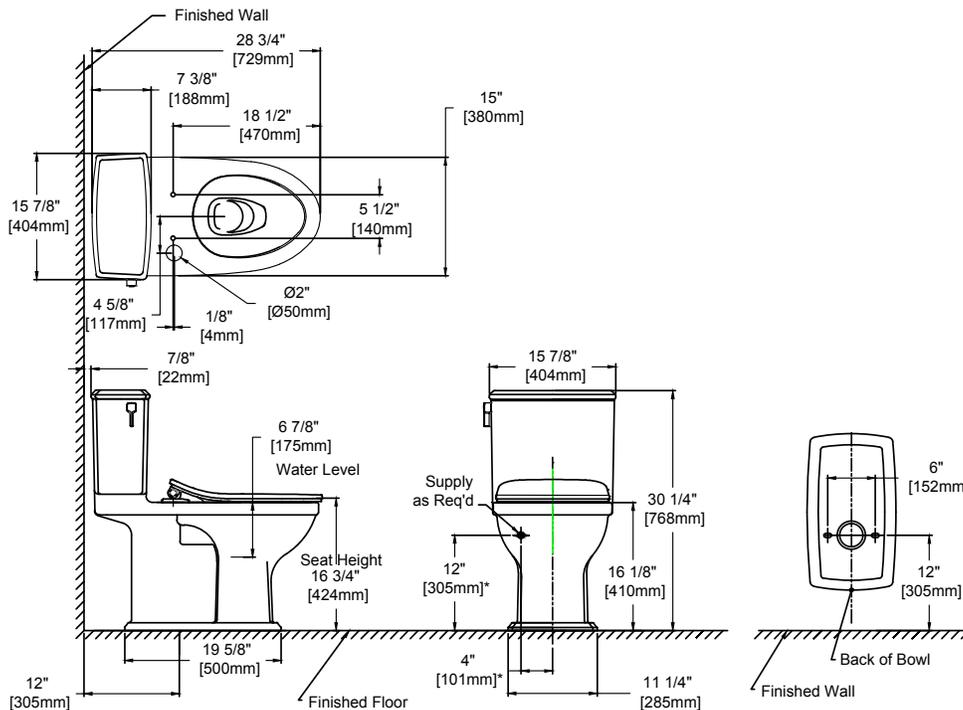

\*Suggested Dimensions

**TOTO®**

These dimensions and specifications are subject to change without notice

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

# SS-01340 v.02