

## DUOFIT® In-Wall Tank Unit, 1.28 GPF & 0.9 GPF

### FEATURES

- Dual-Max® flushing system, low consumption (1.28 GPF/4.8 LPF & 0.9 GPF/3.4 LPF)
- Auto Flush function capability
- Adjustable 15"-19" mounting height
- Support up to 880 lbs.
- Commercial 2" x 6" or optional residential installation with 2" x 4" wall studs with waste outlet kit
- 1-pc blow molded, insulated polyethylene tank to prevent leaks and sweating
- 2" x 6" Polyethylene outlet included
- Pre-plumbed for WASHLET® connection
- Copper supply line

### MODELS

- WT173M - with copper washlet supply line
- WT173MA - Same as WT173M with Auto Flush connection

#### Required Push Plates (Sold Separately)

- YT920 #MS - Matte Silver  
#WH - White
- YT930 #MS - Matte Silver  
#WH - White
- YT970 #SS - Stainless Steel
- YT980 #SS - Stainless Steel

#### Compatible Outlets (Sold Separately)

- THU343 2" x 4" outlet HDPE & PVC
- THU335 2" x 6" outlet cast iron

#### Compatible Wall Hung Bowls (Sold Separately)

- CT437FGT20 - MH WASHLET+ Wall-Hung
- CT447CFGT60 - RP WASHLET+ Wall-Hung
- CT449CFGT60 - SP WASHLET+ Wall-Hung
- CT426CFGT40 - AP WASHLET+ Wall-Hung
- CT428CFGT40 - EP WASHLET+ Wall-Hung

### PRODUCT SPECIFICATION

This universal height, high-efficiency, dual flushing, in-wall tank system toilet shall be 1.28 GPF & 0.9 GPF. Requires TOTO toilet model CT437FGT20, CT426CFGT40, CT428CFGT40, CT447CFGT60, and CT449CFGT60. In-Wall tank system shall be TOTO Model WT173M\_\_\_\_\_.



### CODES/STANDARDS

- Meets and exceeds
  - Carrier system: ASME A112.6.2
  - Tank trim: IAPMO PS50, CSA B125.3, ASSE1002
- Certifications: IAPMO(cUPC), \*EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others



\*WaterSense certification only applies to WT173M(A) when combined with either model CT437FGT20, CT426CFGT40, CT428CFGT40, CT447CFGT60, and CT449CFGT60 toilet bowls.

# WT173M(A)


## DUOFIT In-Wall Tank Unit, 1.28 GPF & 0.9 GPF

### SPECIFICATIONS


- Water Use 1.28 GPF & 0.9 GPF (4.8 LPF & 3.4 LPF)
- Flush System Dual-Max
- Min. Water Pressure 8 psi (static)
- Installation Height 15" to 19" (projected range)
- Warranty One Year Limited Warranty
- Material Various
- Shipping Weight 43 lbs
- Shipping Dimensions 47-1/2" x 26" x 6"

### INSTALLATION NOTES

Adequate structural bracing is required.

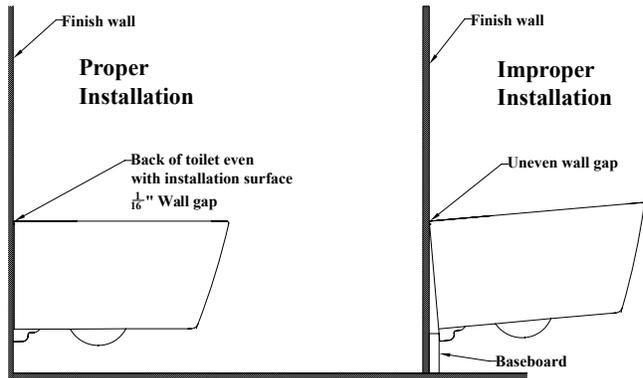

### DIMENSIONS

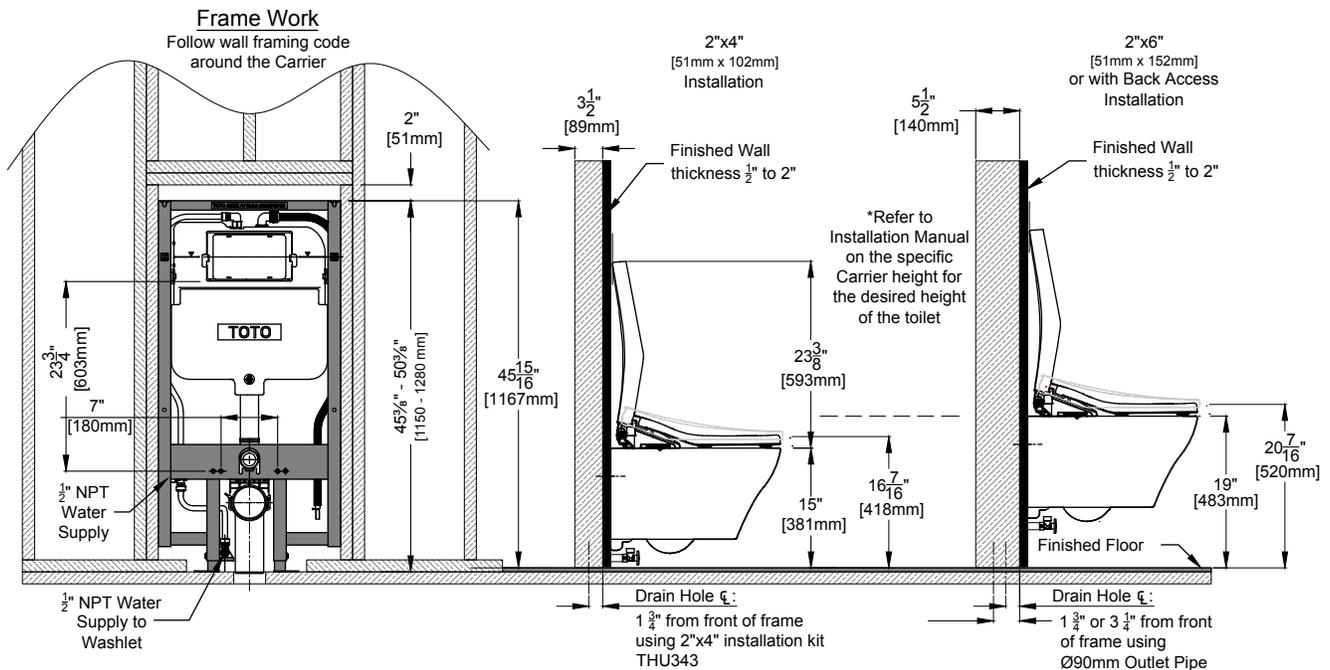

**TOTO**

These dimensions and specifications are subject to change without notice