

## Touchless Soap Dispenser - Round Vessel

### FEATURES

- Sensor operated foaming soap dispenser
- Self-adjusting sensor spout with base unit, mounting hardware and supply lines
- Chrome plated
- Single-hole mount
- TOTO Soap required
- Refillable tank system
- ADA compliant

### COLORS/FINISHES

- #CP Polished Chrome

### OPTIONAL ACCESSORIES

- THP3140#CP  
Escutcheon 1-1/8" ~ 1-1/2" (28 mm ~ 38 mm)
- THP3374  
Mounting bracket for tank

### MODELS

- TES201AD#CP (1 Spout)  
TLK07003G#CP (Spout x 1 pc)  
TLK01101UA (Controller for 1 Spout & Reservoir)
- TES202AD#CP (2 Spouts)  
TLK07003G#CP (Spout x 2 pcs)  
TLK01102U (Controller for 2 Spouts & Reservoir)
- TES203AD#CP (3 Spouts)  
TLK07003G#CP (Spout x 3 pcs)  
TLK01103U (Controller for 3 Spouts & Reservoir)



### Auto Functions

### PRODUCT SPECIFICATION

TOTO Model # \_\_\_\_\_ Product shall be automatic infrared sensor activated. Product shall have automatic sensor adjustment upon installation. Soap dispenser and controller w/ reservoir will be sold separately. Product shall have a controller pump with 0.8 gallon (3L) reservoir.

### CODES/STANDARDS

- Meets and exceeds UL1951, CSA C22.2 #68
- Certifications: UL
- Code Compliance: NEC, CEC
- ADA Compliant
- Compliance with CA Prop 65 warning requirements



### COMPONENT BREAKDOWN

#### Soap Dispenser Specification Details

Step 1: Choose quantity of spouts desired

Step 2: Select kit or by individual component quantities

KIT OPTIONS		COMPONENTS			
Kit Model #	Spout Installation	SPOUT		CONTROLLER & RESERVOIR	
		Model #	Spout Qty	Model #	Component Qty
TES201AD#CP	1	TLK07003G#CP	1	TLK01101UA	1 (For 1 Spout)
TES202AD#CP	2	TLK07003G#CP	2	TLK01102U	1 (For 2 Spouts)
TES203AD#CP	3	TLK07003G#CP	3	TLK01103U	1 (For 3 Spouts)

# TES20(1/2/3)AD Series

## Touchless Soap Dispenser - Round Vessel

### SPECIFICATIONS

<b>Power Supply</b>	AC 120V
<b>Wattage</b>	(TLK01101UA) 4W (TLK01102U) 6.5W (TLK01103U) 9W
<b>Sensor Detection Range</b>	5-1/8" ~ 7-7/8" (130 ~ 200 mm) Sensor is self-adjusting
<b>Ambient Temperature</b>	34-104°F (1-40°C)
<b>Humidity</b>	Max. 90% RH
<b>Power Cord Length</b>	55" (1.4 m)
<b>Soap Output Volume</b>	0.04 oz (factory setting)
<b>Tank Capacity</b>	Approximately 0.8 gallon (3L)
<b>Warranty</b>	*Three Year Warranty

\* Failure to use TOTO soap will void warranty

### INSTALLATION NOTES


- Spout Mounting Hole  $\phi 1"$  ~  $\phi 1\text{-}1/8"$  ( $\phi 25$  ~  $\phi 28$  mm)
- Deck Thickness  $1/4"$  ~  $1\text{-}1/8"$  (5 ~ 30 mm)

### TOTO SOAP *(Sold Separately)*

SKU No.	Quantity	Packaging	Notes
TSFG1	4 gal.	Package of 4, 1 gal. each	Antimicrobial Soap (Fresh)
TSFG55	55 gal.	Package of 1, 55 gal. each	Antimicrobial Soap (Fresh)
TSFB1-GS	4 gal.	Package of 4, 1 gal. each	TOTO Foam Soap Green Seal™ (Lilac)



### DIMENSIONS

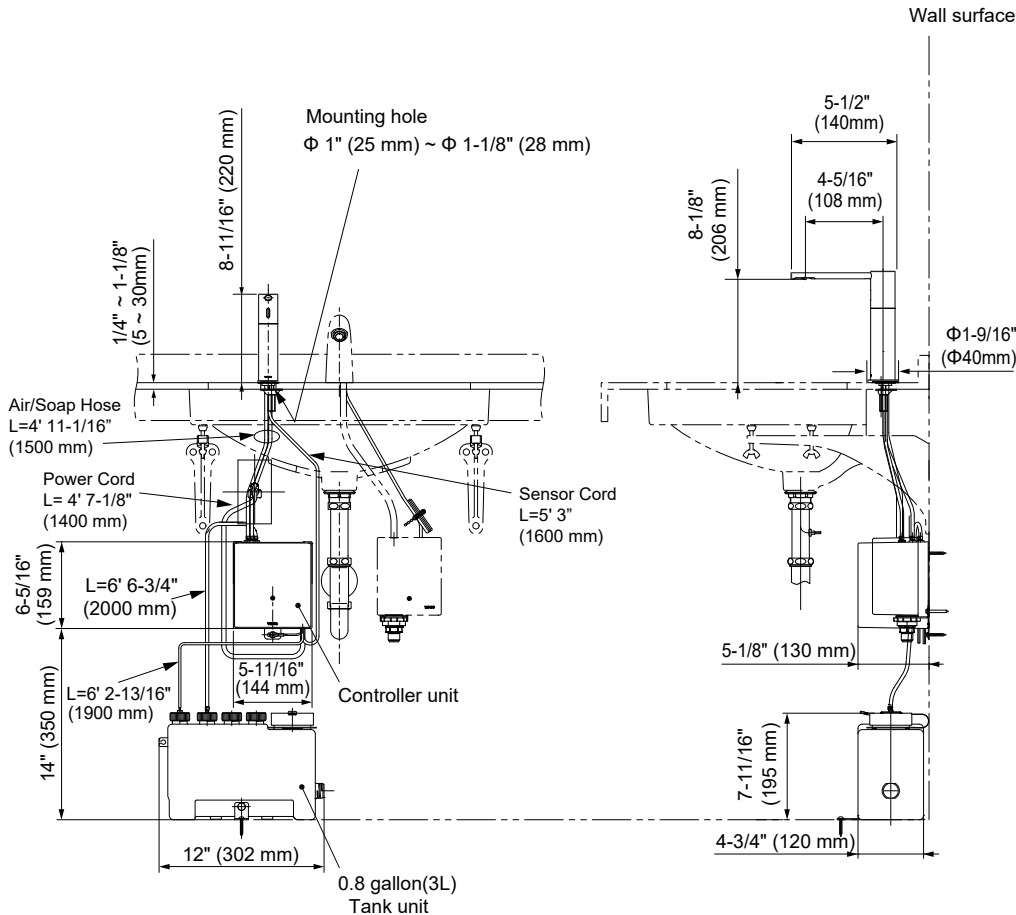

**TOTO**

These dimensions and specifications are subject to change without notice