



DURAWALL®, DURABASE®, STYLEMATE® FIBERGLASS SHOWER ENSEMBLES

DURAWALL® fiberglass wall, DURABASE® fiberglass shower floors, and STYLEMATE® enclosures are recognized for their universal design, high quality, innovative features, ease of installation, and durability.



Tongue-and-groove fit



Direct to stud

Features

- DURAWALL® shower walls feature convenient direct-to-stud mounting, innovative leak-proof, tongue-and-groove panels
- DURAWALL® shower wall systems feature multiple, molded-in shelves and a deep gloss, mildew/stain-resistant finish
- DURABASE® floors feature a slip resistant Starburst® floor design. *See pages 20 and 21 for complete DURABASE® features*
- STYLEMATE® enclosures are available in numerous styles and configurations with tempered safety glass. *See complete features on page 28*



Code Accepted

Fiberglass shower walls meet or exceed performance requirements:

- American Society of Testing and Materials (ASTM) and E-84
- American National Standards Institute (ANSI) Z 124-2017 and Z 97.1



36" CORNER SHOWERS — Double Threshold



Model Color/Glass

DURAWALL® SHOWER WALL

736CWHT White





DURABASE® SHOWER FLOOR

3636DTM White



STYLEMATE® ENCLOSURE

36.202 Bright Silver/Clear

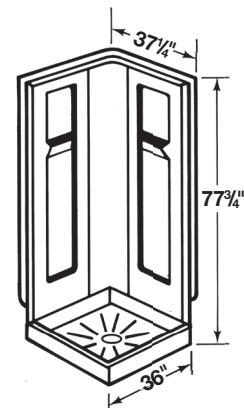

See page 13 for valve placement.


General: Furnish and install as shown on plans, a Corner Shower Ensemble, as manufactured by E. L. Mustee & Sons, Inc., consisting of:

DURAWALL® Shower Walls — Model 736CWHT shall be semi-gloss, 3-piece wall. Panels are molded fiberglass, using matched metal molds under extreme heat and pressure with a minimum uniform thickness of 125 mils and mount direct-to-studwalls. Include corner panel and two side panels with molded-in shelf. Self-aligning panels interlock using a tongue-and-groove connection. Shall meet ANSI Specification Z 124-2017. Color: White.

DURABASE® Shower Floor — Model 3636DTM, refer to page 21 for specifications.



STYLEMATE® Enclosure — Model 36.202, refer to page 28 for specifications.

NEO-ANGLE SHOWERS



Shower Size

Shower Size	A	B	C
36"	37 1/2"	18"	37 1/4"
38"	39 1/2"	20"	39 1/4"
42"	43 1/2"	24"	43 1/4"

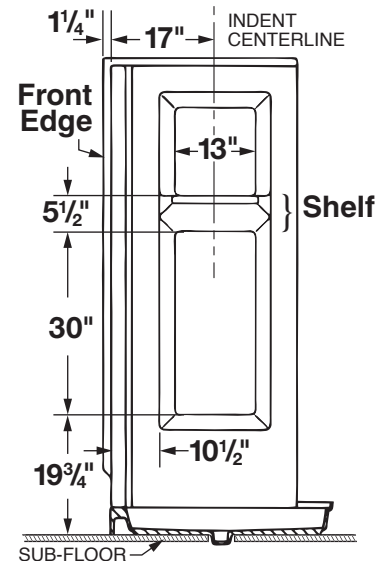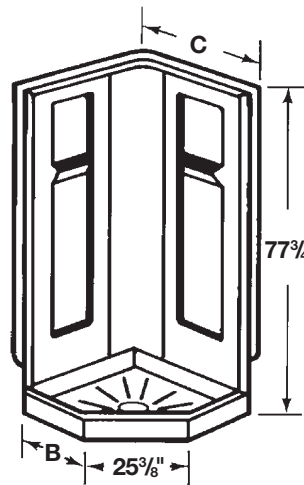

Valve Placement Dimensions

36" Showers

Model Color/Glass



DURAWALL® SHOWER WALLS

736CWHT White



38" Showers

Model Color/Glass

DURAWALL® SHOWER WALLS

738CWHT White



42" Showers

Model Color/Glass

DURAWALL® SHOWER WALLS

742CWHT White



DURABASE® SHOWER FLOOR

3636CM White



DURABASE® SHOWER FLOOR

3838CM White



DURABASE® SHOWER FLOOR

4242CM White



STYLEMATE® NEO-ANGLE ENCLOSURE — Height 70"

36.750 Bright Silver/Obscure
36.761 Bright Silver/Clear
36.762 Brushed Nickel/Clear
36.763 Black Bronze/Clear

STYLEMATE® NEO-ANGLE ENCLOSURE — Height 70"

38.750 Bright Silver/Obscure
38.751 Bright Silver/Clear
38.752 Brushed Nickel/Clear
38.753 Black Bronze/Clear

STYLEMATE® NEO-ANGLE ENCLOSURE — Height 70"

42.751 Bright Silver/Clear
42.752 Brushed Nickel/Clear
42.753 Black Bronze/Clear

General: Furnish and install as shown on plans, NEO-ANGLE Shower Ensembles, as manufactured by E. L. Mustee & Sons, Inc., consisting of:

DURAWALL® Shower Walls — Model: _____ (736C, 738C or 742C) shall be semi-gloss, 3-piece wall. Panels are molded fiberglass, using matched metal molds under extreme heat and pressure with a minimum uniform thickness of 125 mils and mount direct-to-studwalls. Include corner panel and two side panels with molded-in shelf. Self-aligning panels using a tongue-and-groove connection. Shall meet ANSI Specification Z 124-2017. Color: _____ (White, Bone).

DURABASE® Shower Floors — Model: _____ refer to page 21 for specifications.

STYLEMATE® NEO-ANGLE Enclosures — Model: _____ refer to page 28 for specifications.