






SQUARE SHOWERS

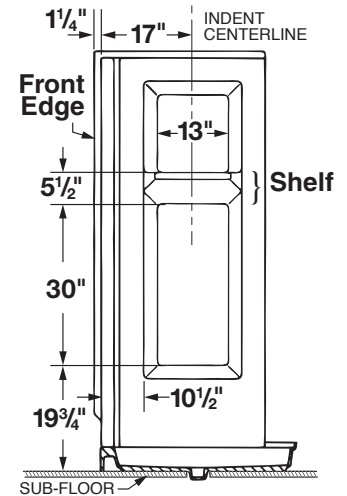


Shower Size	A	B	C	D	E	F
32" x 32"	32"	32"	33½"	16"	16"	33¼"
36" x 36"	36"	36"	37½"	18"	18"	37¼"

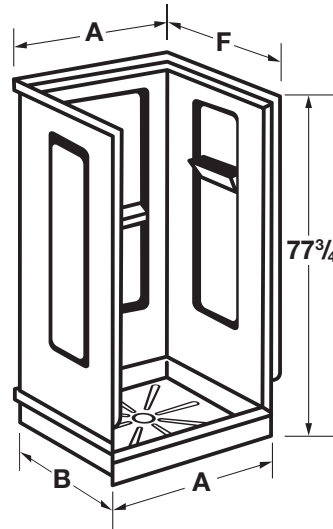

Valve Placement Dimensions

To Determine the approximate Opening for the shower door (enclosure), subtract 2" (5.08 cm) from the shower width. Example: 3248M has a 48" threshold. 48" (121.92 cm) less 2" (5.08 cm) = 46" (116.84 cm). Maximum shower door (enclosure) height can be 72" (182.88 cm).


32" x 32" Showers



Model	Color/Glass
DURAWALL® SHOWER WALLS 732WHT	White



DURABASE® SHOWER FLOOR 3232M	White
---------------------------------	-------



STYLEMATE® PIVOT DOOR – Height 65"	
32.705	Bright Silver/Clear
32.706	Black Bronze/Clear

36" x 36" Showers

Model	Color/Glass
DURAWALL® SHOWER WALLS 736WHT	White



DURABASE® SHOWER FLOOR 3636M	White
---------------------------------	-------



STYLEMATE® PIVOT DOOR – Height 65"	
36.403	Bright Silver/Clear
36.404	Black Bronze/Clear

General: Furnish and install as shown on plans, a Shower Ensemble, as manufactured by E. L. Mustee & Sons, Inc., consisting of:

DURAWALL® Shower Walls – Model: _____ (732 or 736) shall be semi-gloss, 3-piece wall. Panels are molded fiberglass, using matched metal molds under extreme heat and pressure with a minimum uniform thickness of 125 mils and mount direct-to-studwalls. Include center panel with molded-in shelf and two side panels, each with molded-in shelf. Self-aligning panels using a tongue-and-groove connection. Shall meet ANSI Specification Z 124-2017. Color: White.

DURABASE® Shower Floors – Model: _____ refer to page 20 for specifications.

STYLEMATE® Pivot Door Enclosures – Model: _____ refer to page 28 for specifications.

STYLEMATE® SHOWER ENCLOSURES & DOORS

Looking for the best way to finish off your Mustee shower? That's easy... select one of our many decorative STYLEMATE® doors and enclosures to add that finishing touch.


Code Accepted

STYLEMATE® Enclosures meet or exceed performance requirements:

- American National Standards Institute (ANSI) Specification Z 97.1 

Features


- Rolling doors include rollers with long-life bearings for years of smooth operation
- Bright silver, brushed-nickel or black bronze frames are constructed from high-quality engineered aluminum
- Tempered safety glass options include clear or obscure glass
- Pivot doors feature magnetic catch
- Easy to install and clean



Bright Silver



Black Bronze



Brushed Nickel



Pivot Doors – Height 65"

Model	Opening	Finish	Glass
32.705	29½"-31¼"	Bright Silver	Clear
32.706	29¼"-30¼"	Black Bronze	Clear
36.403	33½"-35¼"	Bright Silver	Clear
36.404	33¾"-34¾"	Black Bronze	Clear

General: Furnish and install as shown on plans, a STYLEMATE® Pivot Door, as manufactured by E. L. Mustee & Sons, Inc. Model: _____ shall be a swing style door with a bright _____ (Bright Silver, Black Bronze) finish aluminum frame and clear tempered safety glass panel. Continuous-pull handle with magnetic seal. Out-of-plumb conditions up to 1" can be adjusted at latch jamb. Can be installed for right or left opening. Shall meet ANSI Specification Z 97.1.



By-Pass Framed Door



By-Pass Frameless Door

By-Pass Doors – Height 69"

Model	Opening	Finish	Glass
Framed			
48.403	47"	Bright Silver	Clear
Frameless			
48.406	47"	Bright Silver	Clear
48.407	47"	Brushed Nickel	Clear
48.408	47"	Black Bronze	Clear
Framed			
60.403	59"	Bright Silver	Clear
Frameless			
60.406	59"	Bright Silver	Clear
60.407	59"	Brushed Nickel	Clear
60.408	59"	Black Bronze	Clear

General: Furnish and install as shown on plans, a STYLEMATE® By-Pass Enclosure, as manufactured by E. L. Mustee & Sons, Inc. Model: _____ with bright _____ (Bright Silver, Brushed Nickel, Black Bronze) finish. Shall be by-pass style with aluminum frame and clear tempered safety glass. Out-of-plumb conditions up to 1" can be adjusted. Shall meet ANSI Specification Z 97.1.



Neo-Angle Enclosures – Height 70"

Model	Opening	Finish	Glass
36.750	36" Neo	Bright Silver	Obscure
36.761	36" Neo	Bright Silver	Clear
36.762	36" Neo	Brushed Nickel	Clear
36.763	36" Neo	Black Bronze	Clear
38.750	38" Neo	Bright Silver	Obscure
38.751	38" Neo	Bright Silver	Clear
38.752	38" Neo	Brushed Nickel	Clear
38.753	38" Neo	Black Bronze	Clear
42.751	42" Neo	Bright Silver	Clear
42.752	42" Neo	Brushed Nickel	Clear
42.753	42" Neo	Black Bronze	Clear

General: Furnish and install as shown on plans, NEO-ANGLE Shower Ensemble, as manufactured by E. L. Mustee & Sons, Inc., consisting of: STYLEMATE® Enclosure — Model: _____ with bright _____ (Bright Silver, Brushed Nickel, Black Bronze) finish. Safety glass panels shall be obscure or clear. Side-wall jams adjust ¾" for out-of-plumb walls. Reversible pivot door with continuous-pull handle integrally extruded and magnetic seal. Door can be hung to open left or right. Shall meet ANSI Specification Z 97.1.