






SQUARE SHOWERS



Shower Size


	A	B	C	D	E	F
32" x 32"	32"	32"	33½"	16"	16"	33¼"
36" x 36"	36"	36"	37½"	18"	18"	37¼"

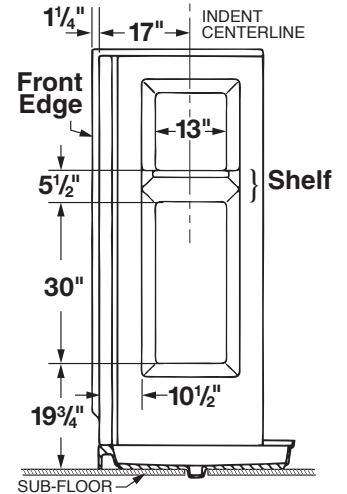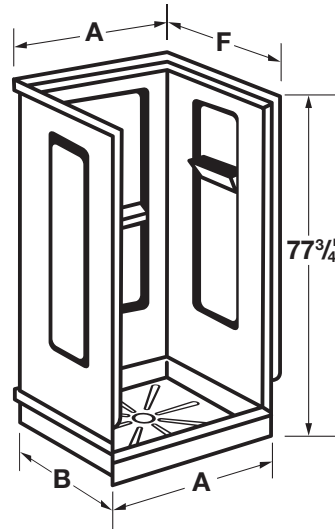

Valve Placement Dimensions

To Determine the approximate Opening for the shower door (enclosure), subtract 2" (5.08 cm) from the shower width. Example: 3248M has a 48" threshold. 48" (121.92 cm) less 2" (5.08 cm) = 46" (116.84 cm). Maximum shower door (enclosure) height can be 72" (182.88 cm).


32" x 32" Showers



Model	Color/Glass
DURAWALL® SHOWER WALLS 732WHT	White



DURABASE® SHOWER FLOOR 3232M	White
---------------------------------	-------



STYLEMATE® PIVOT DOOR – Height 65"	
32.705	Bright Silver/Clear
32.706	Black Bronze/Clear

36" x 36" Showers

Model	Color/Glass
DURAWALL® SHOWER WALLS 736WHT	White



DURABASE® SHOWER FLOOR 3636M	White
---------------------------------	-------



STYLEMATE® PIVOT DOOR – Height 65"	
36.403	Bright Silver/Clear
36.404	Black Bronze/Clear

General: Furnish and install as shown on plans, a Shower Ensemble, as manufactured by E. L. Mustee & Sons, Inc., consisting of:

DURAWALL® Shower Walls – Model: _____ (732 or 736) shall be semi-gloss, 3-piece wall. Panels are molded fiberglass, using matched metal molds under extreme heat and pressure with a minimum uniform thickness of 125 mils and mount direct-to-studwalls. Include center panel with molded-in shelf and two side panels, each with molded-in shelf. Self-aligning panels using a tongue-and-groove connection. Shall meet ANSI Specification Z 124-2017. Color: White.

DURABASE® Shower Floors – Model: _____ refer to page 20 for specifications.

STYLEMATE® Pivot Door Enclosures – Model: _____ refer to page 28 for specifications.