DURAWALL®, DURABASE®, STYLEMATE® FIBERGLASS SHOWER ENSEMBLES



Photo: ShowerTub shower floor and STYLEMATE By-Pass Enclosure.

Replace your standard 30"x60" bathtub with Mustee's popular 3060 Shower Tub™ or 360 Barrier-Free Shower floor. Then complete the installation with Mustee's stylish 760T-30WHT DURAWALL* shower walls. For 34" deep alcoves, use premium 760T-34WHT DURAWALL® Shower Walls

The embossed tile pattern on the back and side panels of the premium 760T-30WHT and 760T-34WHT DURAWALL® shower walls deliver exceptional design features, deep glass finish, and Mustee's trademark quality construction.


Features


- Compression molded fiberglass for optimum strength
- Embossed large-tile pattern
- Five-panel wall system with interlocking tongue-and-groove seams that assemble quickly to create a watertight surround
- Mounts direct-to-stud with mounting flanges hidden behind drywall or other wall treatment
- Available in white
- Smooth, colorfast deep gloss finish, resists scuffs.
- Mold and mildew-resistant, easy to clean
- Designed to support CareGiver® Grab Bars and Fold-Down Seats as needed

Accessories

572.300 VARISTONE[™] – Shelves (Order Separately)

See page 18 for specifications.



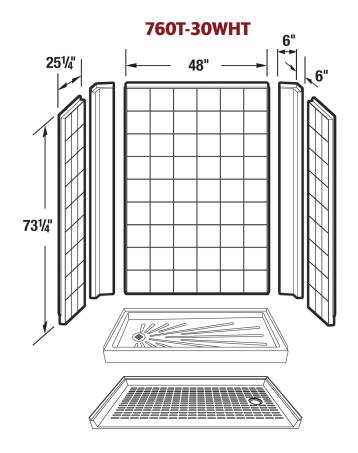

30"x 60" Showers

Model

Color/Glass



DURAWALL® SHOWER WALLS

760T-30WHT

White



DURABASE® SHOWER FLOORS

3060R 3060L

White



(VPC)

CAREGIVER® BARRIER-FREE SHOWER FLOORS



360R White 360L

White





ENTRY RAMP 12" x 60"

360.100



CAREGIVER® GRAB BARS

See page 26 for Grab Bar options.



CAREGIVER® FOLD-DOWN SHOWER SEAT

See page 27 for Fold-Down Seat options.



STYLEMATE® BY-PASS ENCLOSURES FOR 3060L / 3060R

Bright Silver/Clear


60.403

Framed

Frameless

60.406 Bright Silver/Clear 60.407 Brushed Nickel/Clear Black Bronze/Clear 60.408

760T-34WHT 251/4" 731/4"

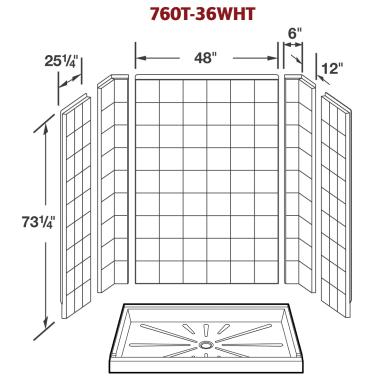

34"x 60" Showers

Model

Color/Glass



DURAWALL® SHOWER WALLS

760T-34WHT

White



DURABASE® SHOWER FLOORS

3460M

White



STYLEMATE" BY-PASS ENCLOSURES



60.403 Bright Silver/Clear

Frameless

124-2017. Color: White.

Framed

60.406 Bright Silver/Clear 60.407 Brushed Nickel/Clear Black Bronze/Clear 60.408

36"x 60" Showers

Model

3660M

Color/Glass



DURAWALL® SHOWER WALLS

760T-36WHT

White



DURABASE® SHOWER FLOORS







STYLEMATE® BY-PASS ENCLOSURES



Framed 60.403 Bright Silver/Clear

Frameless

60.406 Bright Silver/Clear 60.407 Brushed Nickel/Clear Black Bronze/Clear 60.408

General: Furnish and install as shown on plans, a Shower Ensemble, as manufactured by E. L. Mustee & Sons, Inc., consisting of: DURAWALL* Shower Wall Model: ____ _ (760T-30WHT, 760T-34WHT). Shall be semi-gloss 5-piece wall. Panels are molded fiberglass, using matched metal molds under extreme heat and pressure with a minimum uniform thickness of 125 mils and mount direct-to-studwalls. Includes center panel and two corner and side panels. Self-aligning panels using

an interlocking tongue-and-groove seam. Shall meet ANSI Specification Z

SHOWERTUB™ Shower Floors — Model: _____ ____ see page 23 for specifications. CAREGIVER* Barrier-Free Shower Floors — Model: _ page 24 & 25 for specifications. STYLEMATE® By-Pass Enclosures — Model: _ __ see page 28 for specifications. DURABASE* Shower Floors — Model: ____ ___ see pages 20 & 21 for specifications.

STYLEMATE SHOWER ENCLOSURES & DOORS

Looking for the best way to finish off your Mustee shower? That's easy... select one of our many decorative STYLEMATE* doors and enclosures to add that finishing touch.

Features

- Rolling doors include rollers with long-life bearings for years of smooth operation
- Bright silver, brushed-nickel or black bronze frames are constructed from high-quality engineered aluminum
- Tempered safety glass options include clear or obscure glass
- Pivot doors feature magnetic catch
- Easy to install and clean

Code Accepted

STYLEMATE® Enclosures meet or exceed performance requirements:

American National Standards Institute (ANSI) Specification Z 97.1



Bright Silver





Brushed Nickel



Pivot Doors – Height 65"

| Model | Opening | Finish | Glass |
|--------|---------------|---------------|-------|
| 32.705 | 29½"-31½" | Bright Silver | Clear |
| 32.706 | 291/4"-301/4" | Black Bronze | Clear |
| 36.403 | 33½"-35½" | Bright Silver | Clear |
| 36.404 | 333/4"-343/4" | Black Bronze | Clear |

General: Furnish and install as shown on plans, a STYLEMATE* Pivot Door, as manufactured by E. L. Mustee & Sons, Inc. Model: _______ shall be a swing style door with a bright ______ (Bright Silver, Black Bronze) finish aluminum frame and clear tempered safety glass panel. Continuous-pull handle with magnetic seal. Out-of-plumb conditions up to 1" can be adjusted at latch jamb. Can be installed for right or left opening. Shall meet ANSI Specification Z 97.1.



By-Pass Framed Door



By-Pass Frameless Door

By-Pass Doors – Height 69"

| Framed | | | | | | |
|-----------|--|--|--|--|--|--|
| | | | | | | |
| Frameless | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

General: Furnish and install as shown on plans, a STYLEMATE* By-Pass Enclosure, as manufactured by E. L. Mustee & Sons, Inc. Model: _____ with bright _____ (Bright Silver, Brushed Nickel, Black Bronze) finish. Shall be by-pass style with aluminum frame and clear tempered safety glass. Out-of-plumb conditions up to 1" can be adjusted. Shall meet ANSI Specification Z 97.1.



Neo-Angle Enclosures – Height 70"

| Model | Opening | Finish | Glass | |
|--------|---------|----------------|---------|--|
| 36.750 | 36" Neo | Bright Silver | Obscure | |
| 36.761 | 36" Neo | Bright Silver | Clear | |
| 36.762 | 36" Neo | Brushed Nickel | Clear | |
| 36.763 | 36" Neo | Black Bronze | Clear | |
| 38.750 | 38" Neo | Bright Silver | Obscure | |
| 38.751 | 38" Neo | Bright Silver | Clear | |
| 38.752 | 38" Neo | Brushed Nickel | Clear | |
| 38.753 | 38" Neo | Black Bronze | Clear | |
| 42.751 | 42" Neo | Bright Silver | Clear | |
| 42.752 | 42" Neo | Brushed Nickel | Clear | |
| 42.753 | 42" Neo | Black Bronze | Clear | |

General: Furnish and install as shown on plans, NEO-ANGLE Shower Ensemble, as manufactured by E. L. Mustee & Sons, Inc., consisting of: STYLEMATE* Enclosure — Model:
_____ with bright ______ (Bright Silver, Brushed Nickel, Black Bronze) finish. Safety glass panels shall be obscure or clear. Side-wall jambs adjust ¾" for out-of-plumb walls. Reversible pivot door with continuous-pull handle integrally extruded and magnetic seal. Door can be hung to open left or right. Shall meet ANSI Specification Z 97.1.