


TWIST-LOCK CONCEALED FLANGE — locking tabs on the flange cover plate. Turn 15 degrees under the matching wedges on the mounting flange.

GRAB BARS — stainless steel, concealed twist-lock flanges, smooth finish

T Style


Size		Model	
24"	610 mm	390.323	
36"	915 mm	390.324	

Easy to mount flange! 3 Set Screws on post allow pre-mounting to the wall before attaching the bar.

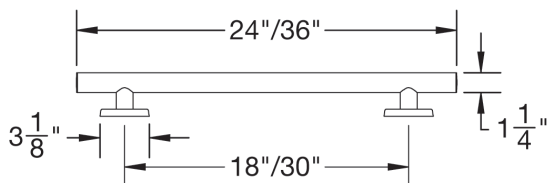

1 1/2" Straight

Size		Model
18"	457 mm	390.305
24"	610 mm	390.301
36"	915 mm	390.306
42"	1067 mm	390.307
48"	1220 mm	390.302



General: Furnish and install as shown on plans, Straight Safety Grab Bar Model: _____, as provided by E. L. Mustee & Sons, Inc. Grab bar with Twist-Lock concealed flange shall be 1 1/2" diameter, 18 gauge, type 304 satin-finish stainless steel tubing. 14-gauge stainless steel mounting flange shall be Heliarc welded to the tube to form a single structural unit. Grab bar shall comply with applicable building codes. Meets ANSI A117.1.

Grab bars benefit those needing extra stability and support when showering or bathing. Mustee's reputation for excellence in both design features and quality make the company's CareGiver® line of Grab Bars the preferred choice of both healthcare professionals and home owners alike.

Featuring exceptional strength and rigidity, produced from heavy gauge stainless steel, CareGiver® grab bars are manufactured to meet or exceed the most stringent industry and government requirements..

Features

- Smooth stainless steel, 18-gauge tubing, satin finish, 1 1/2" diameter, t-style polished finish
- Exclusive "Twist-Lock" concealed flange-snaps into place for a secure, tamper-proof mounting
- All bars have a nominal offset distance of 1 1/2" (38 mm)
- Bar can't separate from flange
- Flat contact surface won't cut wall surfaces – bar remains stable without further tightening
- 304 Stainless steel mounting flange 14 gauge
- Tested to withstand 500 lbs. of downward load when properly installed
- Meets or exceeds HUD, FHA, VA, ADA and other Federal/Local codes

1 1/2" Angled

	A	— Size —	B	C	Model
	24"	610 mm	16"	430 mm	90° 390.308
	32"	813 mm	16"	430 mm	90° 390.309
	24"	610 mm	16"	430 mm	90° 390.310
	32"	813 mm	16"	430 mm	90° 390.311
	30"	762 mm			90° 390.312
	12"	305 mm	No Corner Flange		120° 390.313
	16"	430 mm			120° 390.314
	24"	610 mm			120° 390.315

Inside Corner Styles

	34"	863 mm	18"	457 mm	90° 390.304
	42"	1067 mm	20"	508 mm	90° 390.303

General: Furnish and install as shown on plans, Angled Safety Grab Bar Model: _____, as provided by E. L. Mustee & Sons, Inc. Grab bar with Twist-Lock concealed flange shall be 1 1/2" diameter, 18 gauge, type 304 satin-finish stainless steel tubing. 14-gauge stainless steel mounting flange shall be Heliarc welded to the tube to form a single structural unit. Grab bar shall comply with applicable building codes. Meets ANSI A117.1.