




One piece, single threshold model for recessed installation. Features 1" flange on three remaining sides. Center drain.

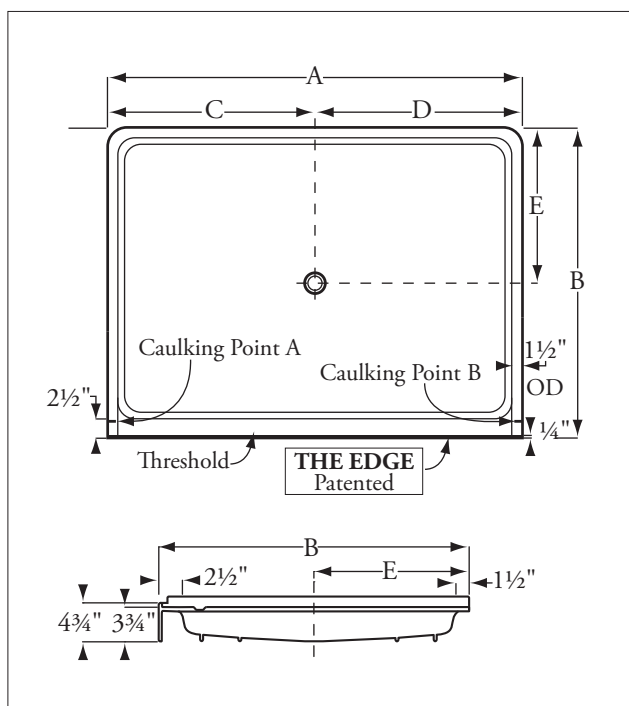

Model	A	B	C	D	E	WT.
3636F	36"	35 ³ / ₄ "	18"	18"	18"	38
3642F	42"	36"	21"	21"	18"	45
4242F	42"	42"	21"	21"	21"	50
3448F	48"	34"	24"	24"	17"	44
3648F	47 ³ / ₄ "	35 ¹ / ₂ "	24"	24"	18"	36
4248F	47 ³ / ₄ "	41 ³ / ₄ "	24"	24"	21"	47
4848F	47 ³ / ₄ "	48"	24"	24"	24"	50
3460F	60"	34"	30"	30"	17"	50
3660F	60"	35 ¹ / ₂ "	30"	30"	17 ³ / ₄ "	50
4260F	59 ³ / ₄ "	41 ¹ / ₂ "	30"	30"	20 ³ / ₄ "	60

Standards:

I.A.P.M.O. International Association of Plumbing and Mechanical Officials
File No. 0687.

ANSI American National Standards Institute - Specifications Z-124.2.

HUD/FHA National Specifications UN-73.



Floestone Molded Fiberglass Shower Receptors with THE EDGE

Architect's Specifications

Furnish and install molded fiberglass one piece shower unit manufactured by Floestone Products Company. Unit to be manufactured of gel-coated fiberglass meeting Class C Flame Retardance and to be supplied with slip-resistant floor laminated for extra rigidity. Color will be white (unless otherwise specified). Unit to be supplied with a 2" PNC non-caulk drain.

Standard Color: White

Optional Colors

Color matching most major manufacturers' colors are available.

Colors

Standard: White, Bone

Special: Granite (see pg. 12)

**Dimensions may vary \pm 1/4" inch.
Please check unit before installation.**

**Place receptor on a bed of mortar or
plaster for warranty compliance.**

**Dimensions subject to
change without notice.**

**Contact Floestone Products to
verify product specifications.**

 **FLOESTONE**
A Spec Above.™

FLOESTONE PRODUCTS CO., INC.

2851 Falcon Drive • Madera, CA 93637

T. 559.661.4171 • T. 800.446.8827

F. 559.661.2070 • floestone.com